

**MOTUL** TECH

# 2021

**PRODUCT CATALOGUE**

# INDUSTRIAL LUBRICANTS





FOLLOW US ON LINKEDIN



FIND MOTULTECH ON YOUTUBE

**CASTED - DRILLED - FILLED**  
THE ROAD TO SUCCESS BY



**MOTUL** **TECH**

<b>COMPANY PRESENTATION</b>	<b>4</b>
<b>CASTED, DRILLED, FILLED: THE MOTUL GROUP EXPERTISE</b>	<b>8</b>

**PART 1** PROCESS LUBRICANTS**01 METAL WORKING** **10**

NEAT MACHINING OILS	12
SPECIALTIES	16
GRINDING & SUPERFINISHING	18
MINIMUM QUANTITY LUBRICATION	20
SOLUBLE MACHINING FLUIDS	22

**02 METAL & SURFACE TREATMENT** **30**

FORMING	32
WIRE DRAWING	36
HEAT TREATMENT	38
CLEANERS	46
RUST PREVENTATIVES	52

**PART 2** MAINTENANCE LUBRICANTS**03 GENERAL LUBRICATION - MAINTENANCE FLUIDS** **54**


HYDRAULIC FLUIDS	56
MULTIFUNCTIONAL OILS	62
GEAR OILS	64
SLIDEWAY OILS	66
SPINDLE OILS	68
CHAIN OILS	70
COMPRESSOR OILS	72
FOOD GRADE OILS	74
HEAT TRANSFER OILS	77

**04 GREASES, PASTES & AEROSOLS** **78**

GENERAL PURPOSE GREASES	80
HIGH & LOW TEMPERATURE GREASES	84
GEAR GREASES	86
MACHINE TOOL GREASES	90
MINING & HD GREASES	92
AGRICULTURE & FORESTRY GREASES	96
FOOD & BEVERAGE GREASES	100
SPECIALTY GREASES	104
AEROSOLS	108

**TABLE OF CONTENT** **110**





# MOTULTECH THE INDUSTRIAL LUBRICANTS DIVISION OF THE MOTUL GROUP

*MotulTech is a division of the Motul Group, a family owned international company manufacturing high performance lubricants for more than 160 years. MotulTech develops, blends and sells top tier industrial lubricants for metal working and machinery lubrication. MotulTech is present in many countries in the world through its products and services, as well as its manufacturing sites and R&D laboratories.*



**INDUSTRIAL AND  
AUTOMOTIVE  
SECTORS ARE KNOWN  
FOR THEIR DYNAMISM  
AND CONTINUING  
EVOLUTION.  
PURSUING  
PERFECTION IMPLIES  
MASTERING EVERY  
SINGLE PROCESS THAT  
A COMPANY WILL  
HAVE TO FACE.**

# metal working lubricants



oils

compounds

emulsions

**SWAN-FINCH OIL CORPORATION**  
834 BUILDING WEST · NEW YORK 20, NEW YORK



MOTUL est aussi livrée en :  
Bidons de 2/4 de gallon (2 litres env.)  
» de 2 » (7 litres 1/2)  
Seaux de 5 » (19 litres)  
Tonnelets d'origine de 58 litres  
» » 116 »  
Grands fûts d'origine de 210 litres

Approvisionnez - vous  
directement à la  
Source de production  
par ces emballages  
d'origine! →

## LA MARQUE SWAN-FINCH

est synonyme de la plus haute qualité et représente pour vous une

**garantie incontestable**

Cette marque "SWAN-FINCH" fondée en 1853 renferme 80 ans d'études et d'expériences mises en valeur pour vous.

**"MOTUL"** est préparée exclusivement avec du GRADE A



Le Grade A est la

plus haute qualité de Naphte existant seul dans un secteur très restreint, est raffiné selon des méthodes uniques brevetées de la Swan Finch Oil Corporation.

## LES SCELLÉS D'ORIGINE

de la Swan-Finch Oil Corporation sont apposés sur tous les emballages à la source même de la production et vous fournissent ainsi une

**sécurité absolue !**

**MOTUL** vous garantit double kilométrage, elle va deux fois aussi loin que toute autre huile.

**MOTUL** est indentifiée par le Ministère de l'Air sous les N° 2550 et 9191, comme étant conforme à la norme Air N° 3560.

**MOTUL** est, malgré son prix légèrement plus élevé, l'huile la plus économique du Marché.

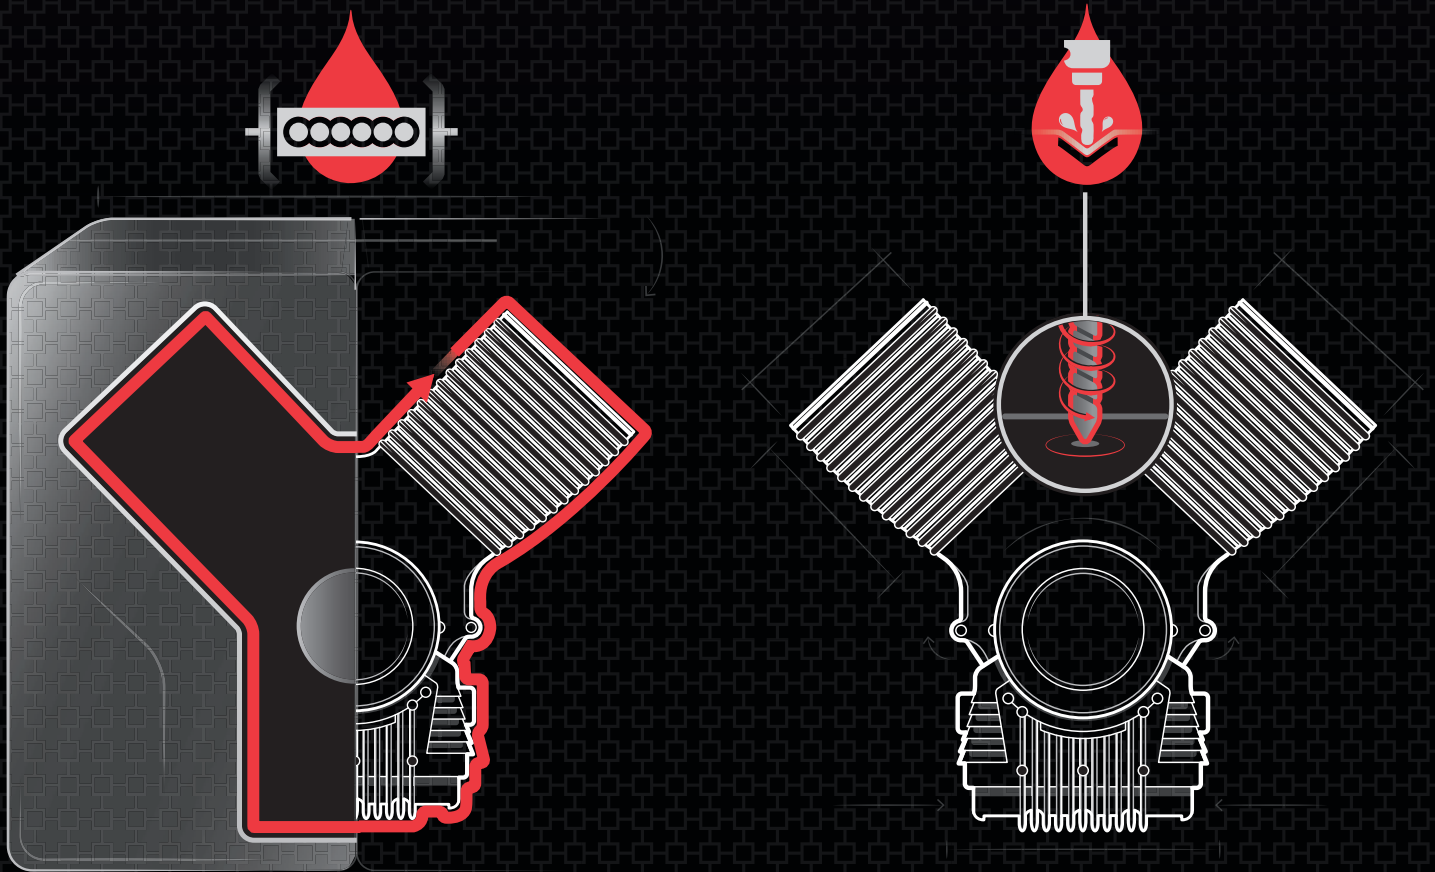
Utilisez pour le maintien de votre matériel les incomparables graisses

# MOTUL

**MOTUL** TECH

# MOTUL GROUP EXPER

**MOTUL** TECH



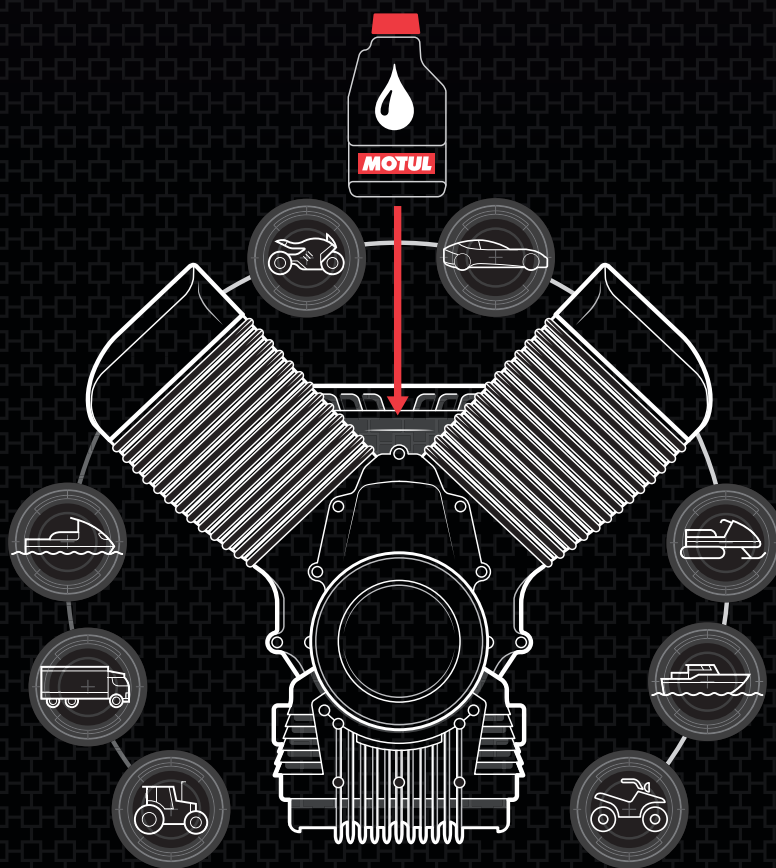
**01** **CASTED**  
FROM MELTED METAL TO DIE  
CASTED METAL BODIES

**02** **DRILLED**  
TRANSFORMING RAW METAL  
INTO FINISHED PARTS



# TISE

## MOTUL



# 03 FILLED

GETTING THE BEST FROM ALL TYPES OF ENGINES  
WITH HIGH PERFORMANCE LUBRICANTS



## PART 1

## PROCESS LUBRICANTS

## 01

METAL  
WORKING

PAGE 10-29 &gt;

NEAT MACHINING OILS	12
SPECIALTIES	16
GRINDING & SUPERFINISHING	18
MINIMUM QUANTITY LUBRICATION	20
SOLUBLE MACHINING FLUIDS	22

*Each machining application is unique, each of our clients has specific needs. The MotulTech offer to its customers encompasses a wide range of neat & soluble machining fluids; this range is the result of a long collaboration process with specialists in machining. By listening to your needs, our experts develop products that reconcile the search for performance and productivity with respect for users and the environment. Conceived to optimize the performance/consumption ratio, these products make it possible to obtain high quality parts at the highest production rates and optimised cost. The ethos behind formulation is to meet the most stringent requirements for hygiene & safety whilst retaining ease of maintenance. MotulTech offers you an extensive set of products and services, including soluble fluids, neat oils and minimum quantity lubrication products. The solution to your quality, productivity or technical problem, will be found in our range.*



# NEAT MACHINING OILS

Dedicated to machining by chips removal, the MotulTech neat oils range covers many applications. It provides customised solutions and allows to make a rational choice depending on the machined material, the operation severity and the required level of performance. Each product viscosity and formulation are studied to offer an optimal performance/price ratio. The MotulTech neat machining oils range has been developed to answer the specific needs of our clients and to allow them to choose the best option with optimal technical performances without compromising the safety and comfort of the user.



## SUPRACUT SUPRACUT G



(SUPRACO 1000)

**APPLICATION**

For the general machining of ferrous and non-ferrous metals. Recommended for turning operations on brass and mild steels. Can also be used in hydraulic systems of machine-tools.

**ADVANTAGES**

- Compatible with all metals.
- Optimum lubricating and anti-wear properties.
- Good cooling properties.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supracut 15 G	15	1a	> 160	107184	107185
Supracut 20 G	22	1a	>200	107357	104342
Supracut 30 G	30	1a	>230	107168	107167
Supracut 45 G	45	1a	230	107042	107043



## SUPRACUT SUPRACUT 20X



(SUPRACO 3020)

**APPLICATION**

High performance neat cutting oil specially developed for difficult machining on ferrous metals.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- Wide range of applications.
- High lubricating and Extreme-Pressure properties.
- Good cooling properties.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supracut 20 X	22	4c	>190	110527	104773



## SUPRACUT EVO SUPRACUT EVO G

(SUPRACO EVO 200)

**APPLICATION**

For all standard machining operations on ferrous and non-ferrous metals. Particularly suitable for machining operations on aluminum, brass, copper and all types of steels.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- Reinforced lubricating properties.
- Good anti-wear properties.
- High flash point and high viscosity index.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supracut EVO 15 G	15	1b	190	107893	107895
Supracut EVO 30 G	30	1b	230	107894	107896



## SUPRACUT EVO SUPRACUT EVO M



(SUPRACO EVO 300)

**APPLICATION**

For all standard turning operations of hard materials (steel, titanium and Inconel), non-ferrous metals and mild steels.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- High lubricating and Extreme-Pressure properties.
- High flash point and high viscosity index.
- Reduced oil consumption: less mist and less evaporation.
- Improved resistance to oxidation.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supracut EVO 10 M	10	1b	>170	108191	108192
Supracut EVO 15 M	15	1b	>210	107928	107929
Supracut EVO 20 M	22	1b	>210	107984	107985
Supracut EVO 30 M	30	1b	>220	107963	107964
Supracut EVO 45 M	45	1b	>220	108193	108194



## SUPRACUT EVO SUPRACUT EVO X



(SUPRACO EVO 400)

**APPLICATION**

For difficult machining on hard metals, stainless steels and hard steels and non-ferrous metals.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- Optimised lubricity and high Extreme-Pressure capabilities.
- Good cooling properties.
- Machine safety (high flash point).

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supracut EVO 10 X	10	1b	>170	109512	109513
Supracut EVO 20 X	22	1b	>200	108923	108922
Supracut EVO 30 X	32	1b	>190	110023	110024
Supracut EVO 45 X	46	1b	>210	110025	110026



## SUPRACUT EVO SUPRACUT EVO 2515

**APPLICATION**

For all standard machining operations on ferrous and non-ferrous metals. Particularly suitable for machining operations on all types of steels.

**ADVANTAGES**

- Free from silicone.
- Good resistance to oxidation.
- High lubricating power and enhanced Extreme-Pressure power.
- Very good anti-wear power: very good surface condition of the parts.
- High flash point.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supracut EVO 2515	15	1b	180	108238	108239



## SUPRACUT INO SUPRACUT INO GG

**APPLICATION**

Premium chlorine and sulphur-free range of neat cutting oils designed for standard machining operations on ferrous and non-ferrous metals.

**ADVANTAGES**

- Consumption optimization.
- Chlorine and zinc-free.
- Good anti-wear properties.
- High flash point.
- Low volatility.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supracut INO 20 GG	22	1a	>230	110041	110042	110043




## SUPRACUT INO SUPRACUT INO MG

**APPLICATION**

Premium chlorine and sulphur-free range of neat cutting oils designed for general machining operations of all types of metals and in all types of machines.

**ADVANTAGES**

- Consumption optimization.
- Reinforced lubricating and cooling power.
- Excellent anti-wear and Extreme-Pressure properties.
- High flash point.
- Low volatility.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supracut INO 20 MG	21	1a	>200	110038	110039	110040






## SUPRACUT INO SUPRACUT INO XG

**APPLICATION**

Premium chlorine and sulphur-free range of neat cutting oils designed for all hard machining on ferrous and non-ferrous metals.

**ADVANTAGES**

- Consumption optimization.
- Reinforced lubricating and cooling power.
- Excellent Extreme-Pressure properties.
- High flash point.
- Low volatility.
- Compatible with high pressures.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supracut INO 20 XG	22	1a	>200	110020	110021	110022





# SPECIALTIES

Thanks to their high content of Extreme-Pressure and lubricating additives, the specialties range products have exceptional performances in severe conditions allowing to reduce tool wear. They are specially dedicated to severe metalworking operations like broaching, deep drilling, tapping and cutting of ferrous metals, stainless steels, nickel alloys and every alloy difficult to machine.



## SUPRACUT SUPRACUT B



(SUPRACO 5000)

### APPLICATION

For severe machining like deep drilling, tapping, deep reaming, broaching operations and all hard machining on ferrous metals and high alloy steels (inconel, stainless steel, titanium).

### ADVANTAGES

- Free from organo-chlorinated additives.
- Very high lubricating properties and Extreme-Pressure capacity.
- High cooling properties.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supracut 15 B	15	4c	>145	104819	104754
Supracut 30 B	30	4b	>190	104685	104603
Supracut 40 B	40	4c	>190	104753	104751
Supracut 50 B	53	4c	>200	108236	108237



## SUPRACUT SUPRACUT 30 K

(SUPRACO 556 SB)

### APPLICATION

Special neat oil, designed for threading operations by knurling deformation of mild steels and high alloyed steels.

### ADVANTAGES

- Very good anti-rust and anti-corrosion properties.
- Very good Extreme-Pressure property.
- High lubricating and cooling power.
- Excellent stability in use.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	FLASH POINT °C	AVAILABLE PACKAGING
			DRUM 180 KG 
Supracut 30 K	32	220	100599





## SUPRACO SUPRACO SPRAY

**APPLICATION**

For very severe machining on all ferrous metals such as manual thread, comb thread, rolling thread, die thread, drilling, manual and semi-automatic tapping.

**ADVANTAGES**

- Very high lubricating properties and Extreme-Pressure capacity.
- Good anti-wear properties.
- Increase tool life.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				6 x AEROSOLS 400 ML	
Supraco Spray	53	4c	100	108719	






## SUPRACUT SUPRACUT EDM 03 (SAFCO EROLEC 100)

**APPLICATION**

Multipurpose dielectric fluid for use in all discharge machines working by penetration especially for roughing, finishing and superfinishing work.

**ADVANTAGES**

- Excellent detergent and cooling power.
- High oxidation and pyrolysis resistance.
- Adapted to every type of spraying.
- Strong chips decantation power.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supracut EDM 03	2.3	1a	103	108598	108628	104568





# GRINDING & SUPERFINISHING

The MotulTech range of grinding products has been formulated to efficiently meet the requirements of superfinishing operations on ferrous and non-ferrous metals. Each product of the range has been developed to answer a specific need. Their formulation ensures high efficiency and the good decantation of fines. Base oils have been carefully selected to limit vaporisation and mists. The viscosity of each product is perfectly adapted to limit consumption.



## SUPRAGRIND SUPRAGRIND 05 G




(PROFILINE 1005)

### APPLICATION

For high yields machining operations of all types of materials, lapping, grinding and sharpening of HSS and carbide tools with diamond or CBN wheels.

### ADVANTAGES

- Free from organo-chlorinated additives and sulphur.
- Compatible with all metals.
- High lubrication and good cooling properties.
- Enhance the finished aspect of the parts.
- High flash point and viscosity index.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supragrind 05 G	5	1a	132	108278	108279	108280



## SUPRAGRIND SUPRAGRIND 10 X

(PROFILINE 10EP)

### APPLICATION

Grinding hard metals of poor machinability and for grinding carbide and high-speed steel tools using diamond grinding wheels or CBN grinding wheels.

### ADVANTAGES

- Free from organo-chlorinated additives.
- Clear and odourless.
- Compatible with all metals.
- Good lubricating and Extreme-Pressure properties.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supragrind 10 X	10	1b	155	108878	106995



## SUPRAGRIND EVO SUPRAGRIND EVO 08 M

(PROFILINE 1008)

**APPLICATION**

For high yields machining operations of all types of materials, lapping, grinding and sharpening of HSS and carbide tools with diamond or CBN wheels.

**ADVANTAGES**

- Free from organo-chlorinated additives and sulphur.
- Compatible with all metals.
- High lubrication and good cooling properties.
- Enhance the finished aspect of the parts.
- High flash point and viscosity index.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supr grind EVO 08 M	8	1a	170	106892	105862



## SUPRAGRIND INO SUPRAGRIND INO 08 GV

(PROFILINE XS8)

**APPLICATION**

For grinding and sharpening operations with diamond or cubic boron nitride wheels of carbide and HSS tools. Formulated with synthetic and biodegradable esters.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- Compatible with all metals.
- High lubricating power and high pressure absorbing capacity.
- Good cooling properties.
- High flash point.
- Low mist.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Supr grind INO 08 GV	8	1a	>180	109612	109611





# MINIMUM QUANTITY LUBRICATION

The Supracut MQL range dedicated to minimum quantity lubrication is particularly adapted to sawing, drilling, threading and milling operations on every type of material. Each product has a high flash point and a high biodegradability level. The whole range allows minimum oil consumption and easy parts degreasing, with no regulatory labelling.



## SUPRACUT MQL SUPRACUT MQL




(SUPRACO 1308E, 1309, 1315, 1320WR)

### APPLICATION

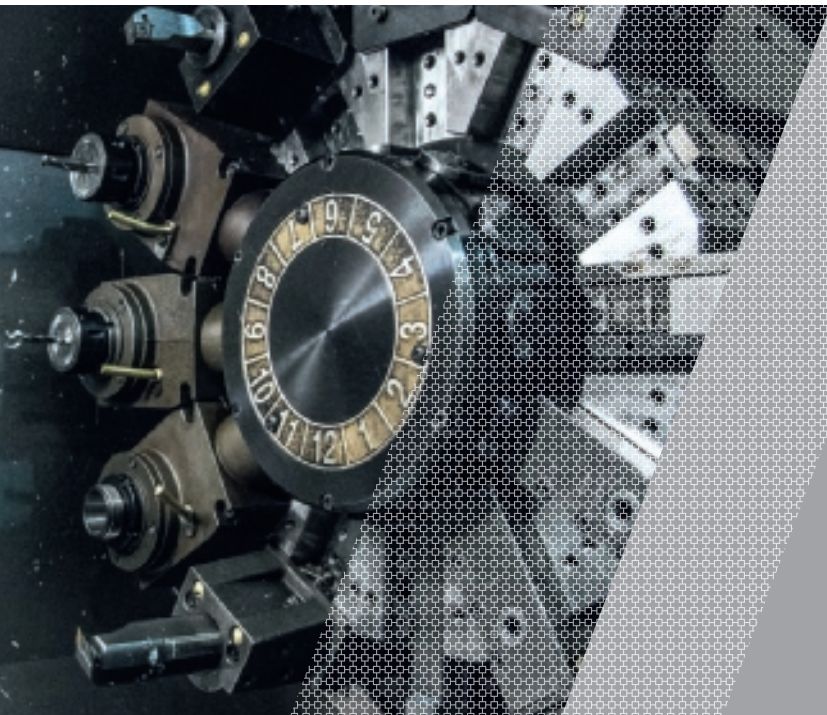
For machining involving chips removal of ferrous and non-ferrous metals, with a micro-spray circulation system. Designed for operations of milling with milling and sawing tools, cutting and tapping.

### ADVANTAGES

- High lubrication and anti-wear properties.
- Very good wettability.
- High viscosity index.
- High flash point.

PRODUCT NAME	VISCOSITY GRADES AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	BASE OIL	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 50 KG 	DRUM 190 KG 
Supracut MQL 15	15	1a	>210	Ester + Vegetable	105575	-	-
Supracut MQL 20	22	1a	180	Synthetic alcohol	110513	102939	-
Supracut MQL 30	35	1a	>260	Ester	104375	-	-
Supracut MQL 45	46	1a	>320	Ester	104237	-	100561





# SOLUBLE MACHINING FLUIDS

MotulTech high performance soluble fluids cover a wide range of machining applications. Their formulations answer the highest regulation standards. In addition, MotulTech proposes a complete range of products and services to ensure fluid maintenance and guarantee the best performances level.




## SYNTHETIC FLUID **BIOCOOL 3130**

### APPLICATION

Light to moderate machining and grinding operations on ferrous and hard metals.

### ADVANTAGES

- Formaldehyde free.
- Excellent cooling and detergency.
- Good separation from tramp oils.
- Very good protection against corrosion.
- Excellent biostability and stability in use.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING
					DRUM 208 L 
Biocool 3130	Clear yellow-green	3 - 6%	0 - 800	3.1	108514






## SYNTHETIC FLUID **BIOCOOL 3210**

### APPLICATION

Light to moderate grinding and machining operations on ferrous metals and titanium. Recommended for low to medium water hardness.

### ADVANTAGES

- Formaldehyde free.
- High cooling properties.
- Approved by SNECMA on titanium.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 200 L 	IBC 1000 L 
Biocool 3210	Clear yellow-green	3 - 8%	0 - 800	2.3	105690	105693	105691





## SYNTHETIC FLUID BIOCOOL 3520

**APPLICATION**

Dedicated to carbides and hard steel grinding requiring advanced cooling properties.

**ADVANTAGES**

- Formaldehyde and formaldehyde releasers free.
- Excellent biostability and stability in use.
- Good separation from tramp oils.
- Very good particles settling.
- Avoid cobalt leaching.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					JERRYCAN 20 L 	DRUM 208 L 
Biocool 3520	Clear yellow-green	3 - 6%	0 - 600	2.3	108530	108318





## SYNTHETIC FLUID BIOCOOL 3740

**APPLICATION**

All grinding and machining operations on hard metals. Particularly suited to metalworking which requires high pressure (from 50 to 600 bars).

**ADVANTAGES**

- Formaldehyde, formaldehyde releasers and boron free.
- SNECMA approval on titanium.
- Excellent lubrication and cooling properties.
- Good separation from tramp oils.
- Optimization of surface roughness and finishes.
- Excellent biostability and stability in use.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					JERRYCAN 20 L 	DRUM 208 L 
Biocool 3740	Clear yellow-green	3 - 15%	0 - 400	1.6	108524	





## SYNTHETIC FLUID BIOCOOL 3820

**APPLICATION**

Light to moderate grinding and machining operations on ferrous metals and non-ferrous metals. Recommended for low to medium water hardness.

**ADVANTAGES**

- Boron free.
- Formaldehyde free.
- Good lubricity and cooling properties.
- Excellent biostability and stability in use.
- Good separation from tramp oils.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					JERRYCAN 20 L 	DRUM 200 L 
Biocool 3820	Clear yellow-green	3 - 12%	0 - 800	2.4	107852	106328



## SYNTHETIC FLUID **BIOCOOL 3837 GR**

**APPLICATION**

Moderate to severe grinding and machining operations on ferrous metals. Recommended for low to medium water hardness.

**ADVANTAGES**

- Boron free.
- Formaldehyde free.
- Excellent air release properties.
- Very good lubricity and cooling properties.
- Improvement of tool life.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					DRUM 202 L	
Biocool 3837 GR	Clear yellow-green	5 - 12%	0 - 400	1.3	108542	






## SEMI-SYNTHETIC FLUID **SAFKOOL 6110 CS**

**APPLICATION**

Light to moderate grinding and machining on ferrous metals. Recommended for low to medium water hardness.

**ADVANTAGES**

- Formaldehyde free.
- High cooling properties.
- Low consumption.
- Very good biostability.
- Cleanliness of machines and parts.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Safkool 6110 CS	Translucent	5 - 8%	100 - 400	2.5	109361	109360	109359






## SEMI-SYNTHETIC FLUID **SAFKOOL 6210**

**APPLICATION**

Light to moderate grinding and machining on ferrous metals. Can also be used for standard machining operations on yellow metals in certain conditions.

**ADVANTAGES**

- Formaldehyde free.
- Excellent cooling properties.
- Excellent biostability and stability in use.
- Operator friendly.
- Cleanliness of working environment.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Safkool 6210	Translucent	4 - 8%	200 - 500	1.7	108531	108512	108513








## SEMI-SYNTHETIC FLUID **SAFKOOL 6220**

**APPLICATION**

Light to moderate machining operations on ferrous and non-ferrous metals. Recommended for medium to very high-water hardness.

**ADVANTAGES**

- Formaldehyde and bactericide free.
- Excellent stability in hard waters.
- Cleanliness of machines and parts.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Safkool 6220	Translucent	5 - 15%	200 - 800	1.6	109628	109626	109627






## SEMI-SYNTHETIC FLUID **SAFKOOL 6420**

**APPLICATION**

Moderate to severe machining and grinding operations on all metals, including aerospace alloys. Recommended for soft to medium water hardness. Suitable for high pressure jet (up to 70 bars).

**ADVANTAGES**

- Formaldehyde free.
- Good release of tramp oils.
- Approved by SNECMA on aluminum and titanium.
- Product free of safety labelling.
- Reduction of tools wear and improvement of surface roughness.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Safkool 6420	Translucent	5 - 12%	50 - 800	1.65	109758	109747	109746





## SEMI-SYNTHETIC FLUID **SAFKOOL 6620**

**APPLICATION**

For severe operations like broaching, boring, tapping and some forming applications on ferrous, high alloyed and stainless steels.

**ADVANTAGES**

- Formaldehyde free.
- Excellent cooling and Extreme-Pressure properties.
- Optimization of surface finish.
- Excellent biostability and stability in use.
- Operator friendly.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					JERRYCAN 20 L 	DRUM 200 L 
Safkool 6620	Translucent	4 - 20%	200 - 500	1.6	105682	105683




## SEMI-SYNTHETIC FLUID **SAFKOOL 6817 GR**

**APPLICATION**

Light to moderate machining and grinding operations on ferrous and non-ferrous metals.

**ADVANTAGES**

- Formaldehyde and boron free.
- Very good cooling and detergency properties.
- Very good particles settling properties.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					DRUM 200 L	
Safkool 6817 GR	Translucent	5 - 8%	100 - 500	1.5	107375	






## SEMI-SYNTHETIC FLUID **SAFKOOL 6820 SW**

**APPLICATION**

Machining of ferrous and non-ferrous alloys, including standard aluminum alloys. Suitable for dilution in soft water and uses under high pressure.

**ADVANTAGES**

- Boron, bactericide, formaldehyde & formaldehyde releasers free.
- Excellent lubricating & cooling properties.
- Excellent non-foaming properties.
- High pressure compatible.
- Optimization of surface finish and endurance.
- Excellent biostability and stability in use.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Safkool 6820 SW	Translucent	4 - 15%	100 - 500	1.5	109491	109492	109495





## SEMI-SYNTHETIC FLUID **SAFKOOL TMC**

**APPLICATION**

Water emulsifying metalworking fluid concentrate dedicated to steel ERW tube manufacturing operations (including galvanized steels).

**ADVANTAGES**

- Boron, formaldehyde & formaldehyde releasers free.
- Excellent cooling & detergent properties.
- Good separation from tramp oils.
- Very good protection against corrosion.
- Excellent biostability and stability in use.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					DRUM 208 L 	IBC 1000 L 
Safkool TMC	Translucent	5 - 7%	5 - 500	1.4	107966	107967





## EMULSION STABILIS 9120

**APPLICATION**

Water soluble metalworking fluid concentrate dedicated for general machining of copper alloys, cast iron, steel and standard aluminum alloys.

**ADVANTAGES**

- Excellent lubricating and cooling properties.
- Low foaming product.
- Excellent biostability in use.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					JERRYCAN 20 L 	DRUM 208 L 
Stabilis 9120	Milky white	4 - 10%	200 - 600	0.88	109073	109072






## EMULSION STABILIS 9220

**APPLICATION**

Light to moderate machining operations on ferrous and non-ferrous metals. Suitable for medium to high hardness water.

**ADVANTAGES**

- Formaldehyde free.
- Good compromise between lubricating and cooling properties.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Stabilis 9220	White opalescent	5 - 8%	100 - 600	1.2	108526	108509	108510






## EMULSION STABILIS 9230

**APPLICATION**

Medium to severe machining operations on ferrous and non-ferrous metals, including all aerospace alloys. High pressure compatible (up to 70 bars).

**ADVANTAGES**

- Formaldehyde free.
- High lubrication performance.
- Optimization of surface roughness and finishes.
- Approved by SNECMA on aluminum and titanium.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Stabilis 9230	White opalescent	5 - 15%	200 - 500	1.0	108529	108520	108523




## EMULSION **STABILIS 9837 AL**

**APPLICATION**

Heavy duty machining on aluminum (cast & automotive) and steel alloys. Suitable for both soft and hard water.

**ADVANTAGES**

- Formaldehyde and boron free.
- Good cooling and detergency properties.
- Very good lubricity.
- Good emulsion stability, even in hard waters.
- Excellent biostability.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					DRUM 200 L	
Stabilis 9837 AL	Milky white	10%	100 - 800	1.0	107373	






## EMULSION **STABILIS 9910 AL**

**APPLICATION**

Water soluble concentrate particularly suited to all machining processes on steels, aluminum and its alloys. Particularly effective for all machining operations on ferrous and non-ferrous alloys on both soft and hard water.

**ADVANTAGES**

- Formaldehyde and boron free.
- Good cooling and detergent properties.
- Excellent biostability and stability in use.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Stabilis 9910 AL	Milky white	5 - 15%	100 - 600	0.97	109550	109551	109549






## EMULSION **STABILIS 9920 AL**

**APPLICATION**

All machining processes on aluminum and its alloys. All machining operations on ferrous and non-ferrous alloys on both soft and hard water.

**ADVANTAGES**

- Boron, formaldehyde and formaldehyde releaser free.
- Very good cooling and detergency properties.
- Good lubrication properties.
- Excellent stability in use.
- Excellent biostability.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
					JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Stabilis 9920 AL	Milky white	4 - 15%	100 - 600	0.98	108258	109514	108260





## EMULSION **SAFCOLITH GR 2 NS**

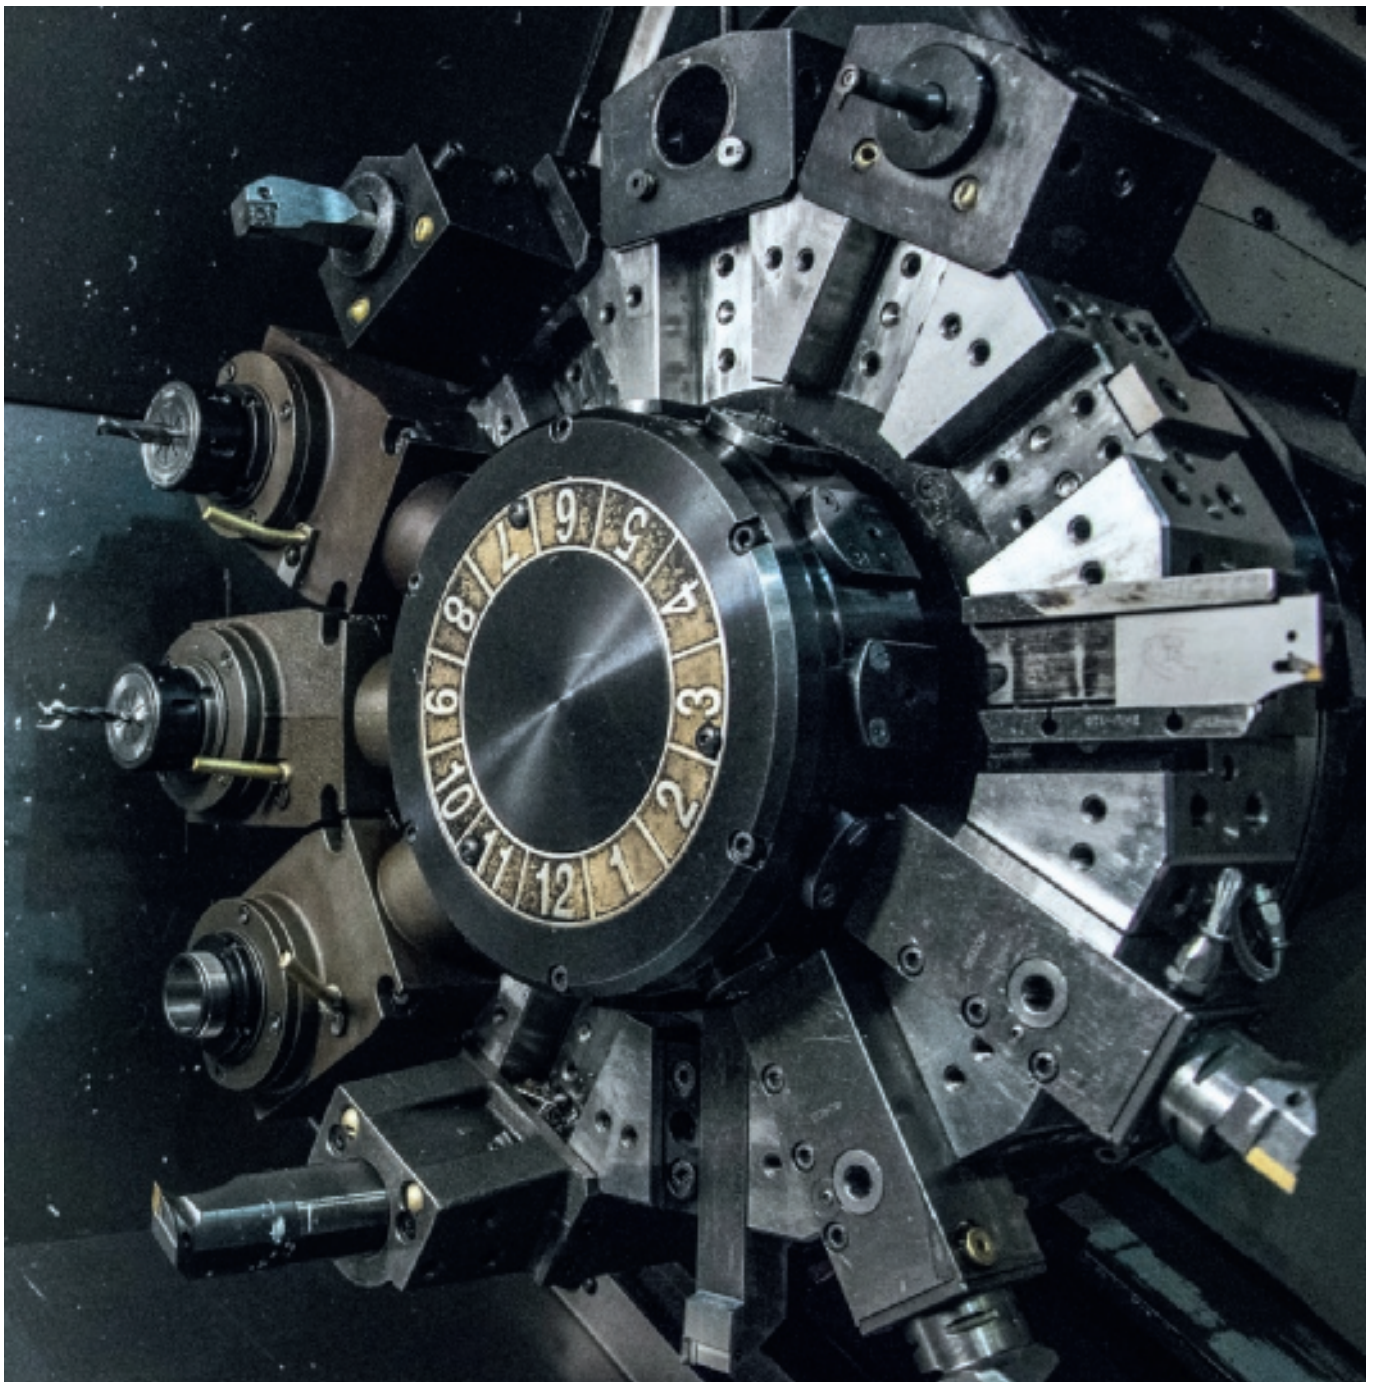
**APPLICATION**

Soluble concentrate which facilitates granite cutting and increases the life of diamond tools. It can be used for cutting of granite blocks on cutting machines or multi-disks machines.

**ADVANTAGES**

- Formaldehyde & boron free.
- Can be used on a wide range of granite.
- Excellent lubricating power for stone cutting.
- Increased diamond tools life.
- No gumming.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION OF USE (DEPENDS ON THE APPLICATION AND THE MATERIALS)	WATER HARDNESS (PPM)	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
					DRUM 170 KG 	IBC 1000 L 
Safcolith GR 2 NS	Milky white	1.5 - 2.5%	100 - 300	1.1	101962	100715





**PART 1**

**PROCESS LUBRICANTS**

# 02

## METAL & SURFACE TREATMENT

**PAGE** 30-53 >

FORMING	32
WIRE DRAWING	36
HEAT TREATMENT	38
CLEANERS	46
RUST PREVENTATIVES	52



# FORMING

Every forming, drawing and pressing application has specific constraints, each of our customers is unique. It is for this reason that MotulTech offers a wide range of soluble and neat deformation products. Listening to your requirements, our experts develop products that reconcile the search for high performance and productivity with the respect for users and the increasingly important environmental factors. Expert assistance is always available to tailor-make solutions to fit your process.






## COLD FORMING UNIVERSELLE SC

**APPLICATION**

Multi-purpose range of neat oils for cold heading, tapping applications and suitable for the machine-tools lubrication. UNIVERSELLE 800 SC can be used as a booster for neat cutting and forming oils from 5 to 20%.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- UNIVERSELLE SC covers cold heading and lubrication applications at once.
- Non-staining on non-ferrous metals.
- Very high Extreme-Pressure capacities.
- No corrosion.
- Very high lubrication properties.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
UNIVERSELLE 55 SC	54	1a	214	-	108488	108489
UNIVERSELLE 68 SC	68	1a	224	-	-	104855
UNIVERSELLE 90 SC	90	1a	214	-	104875	104609
UNIVERSELLE 150 SC	145	1a	216	-	-	108490
UNIVERSELLE 800 SC	155	4b	230	104787	106398	104771





## COLD FORMING UNIVERSELLE 68 EP

**APPLICATION**

High-Performance neat oil designed for severe cold heading and tapping operations on ferrous metals.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- High wettability ensuring an even distribution of the lubricant between the tool and machining part.
- High Extreme-Pressure properties.
- High oxidation stability.
- Good separation from wire drawing soaps.
- Limited smoke.
- Easy to clean with standard cleaning processes.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Universelle 68 EP	68	4c	> 200	109718	109979



## COLD FORMING CENTER OIL FZ-4001E

**APPLICATION**

High-performance neat cold forming oil. Suitable for:

- Cold forging and stamping of press on steel, carbon steel, alloyed steel and stainless steel.
- Drawing of steel, carbon steel, alloyed steel and stainless steel.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- Extended tool life.
- Better surface finishing.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	
Center Oil FZ-4001 E	128	1a	204	104602	



## BLANKING & STAMPING CENTER OIL FZ-8081 E

**APPLICATION**

High-performance neat oil designed for vertical press or transfer machines applications. Recommended for thin metal sheets (around 3 mm) stamping and cutting. Particularly suitable for stainless steels.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- Extended tool life thanks to EP and lubricating properties.
- Better surface finishing.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	
Center Oil FZ-8081 E	22	4a	188	106508	





## BLANKING & STAMPING CENTER OIL FZ-8209 E

**APPLICATION**

High-performance neat oil designed for vertical press or transfer machines applications. Recommended for thin metal sheets (around 3 mm) stamping and cutting. Particularly suitable for stainless steels.

**ADVANTAGES**

- Free from organo-chlorinated additives.
- Extended tool life thanks to EP and lubricating properties.
- Better parts finishing.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Center Oil FZ-8209 E	387	4c	192	105801	105910



## STAMPING & BLANKING SUPRACO ELECTRIC 40A

**APPLICATION**

Neat oil used for the impregnation of induction core contactors, circuit breakers and other similar devices.

**ADVANTAGES**

- Reduced compaction of induction metal sheet.
- Can be used for both degreasing and impregnation before assembly.
- Reduced consumption (less than 50 mg per assembly).
- Water repellent, prevents scrubbing and oxidation.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 180 KG 	
Supraco Electric 40A	48	1a	238	100816	




## STAMPING & BLANKING CADREX DR SC

**APPLICATION**

Neat oil designed for drawing, bending, reshaping and fine blanking on all ferrous and non-ferrous metals, under low-duty conditions. Approved by RENAULT.

**ADVANTAGES**

- Non-chlorinated product.
- No yellowing under HPRL lightning.
- Provides short-term protection if not rinsed.
- Lubricant residues easy to clean before paint application.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	
Cadrex DR 40 SC	40	1a	> 155	107345	
Cadrex DR 100 SC	100	1a	> 200	106980	
Cadrex DR 220 SC	220	1a	256	106952	



## VANISHING OIL CADREX V 877

**APPLICATION**

Vanishing fluid designed for the forming and cutting of thin sheets of ferrous and non-ferrous metals.

**ADVANTAGES**

- Multi-purpose and versatile thanks to its fluidity.
- No degreasing step after metalworking.
- Ready to use.
- Contains an Extreme-Pressure, chlorine-free additive.
- Compatible with non-ferrous metals.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				JERRYCAN 20 L 	DRUM 200 L 
Cadrex V 877	1.5	1a	> 62	110506	104874




## VANISHING OIL CADREX EV

**APPLICATION**

Vanishing fluid, specifically designed for the forming and cutting of steel, stainless steel, aluminum and copper alloys. Complies with US FDA status and meets the requirements of the food industry.

**ADVANTAGES**

- Odourless.
- High evaporation rate.
- Low surface tension.
- Application: low pressure spraying, roller, impregnation by dipping.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				JERRYCAN 20 L 	DRUM 200 L 
Cadrex EV 1100	1.4	1a	62	109829	104715
Cadrex EV 1400	1.4	1a	62	109830	107358
Cadrex EV 1600	1.5	1a	62	110281	-
Cadrex EV 1800	< 7	4b	70	109563	-
Cadrex EV 4012	2.6	1a	105	109831	105855



## NEAT & SOLUBLE FORMING FLUID CADREX FL 100

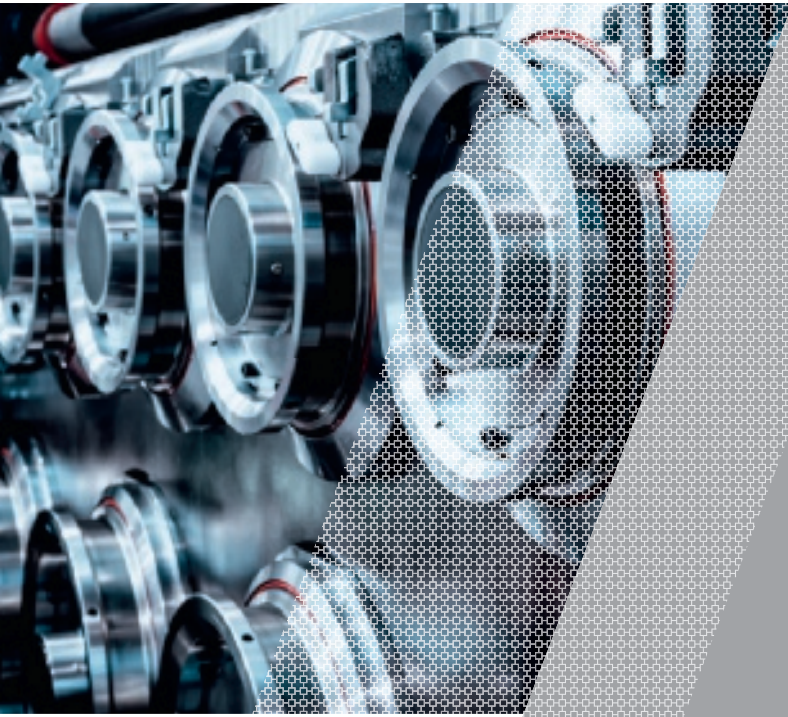
**APPLICATION**

Emulsifying neat oil for deformation, stamping and fine blanking operations from medium to heavy duty. Reinforced Extreme-Pressure properties allowing operations on hard materials such as stainless steel. Particularly suitable for stainless steels.

**ADVANTAGES**

- Very high lubrication properties.
- Very high Extreme-Pressure capacities.
- Low foaming.
- Excellent biostability.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	COPPER CORROSION	FLASH POINT °C	AVAILABLE PACKAGING	
				DRUM 208 L 	
Cadrex FL 100	100	4b	194	106088	



# WIRE DRAWING

SUPRADRAW is a comprehensive range of wire drawing lubricants which is dedicated for copper wire drawing applications. MotulTech is committed to provide the best balance between lubrication and detergency depending on the application. Our range is designed to be used on rod breakdown, single wire and multi-wire machines.




## COPPER WIRE DRAWING SUPRADRAW 211

**APPLICATION**

Water-emulsifiable concentrate dedicated to copper wire drawing applications. Suitable for applications ranging from Rod breakdown to fine copper wire, tinned copper or enamelled copper wire.

**ADVANTAGES**

- Optimal lubrication.
- Very good surface condition of the wires.
- Low foaming.
- Resists destabilization by hard water salts and dissolved copper ions.
- Excellent filterability.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION %	PH AT 5%	REFRACTOMETER FACTOR	AVAILABLE PACKAGING
					DRUM 208 L 
Supradraw 211	Brown	4-15%	9.1	1.07	109956




## COPPER WIRE DRAWING SUPRADRAW 311

**APPLICATION**

Soluble concentrate developed for intermediate to super fine copper wire drawing operations. Excellent lubrication and detergency properties which are particularly suitable for fine and super fine copper wire drawing operations.

**ADVANTAGES**

- Reduces the risk of wire breakage.
- Reduces die wear.
- Very good biostability.
- Low foaming.
- Allows a clean finish.
- Good filtration.
- Corrosion resistance.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION %	PH AT 5%	REFRACTOMETER FACTOR	AVAILABLE PACKAGING
					DRUM 208 L 
Supradraw 311	Milky	2-12%	8.9	1.2	110694




## COPPER WIRE DRAWING **SUPRADRAW 411**

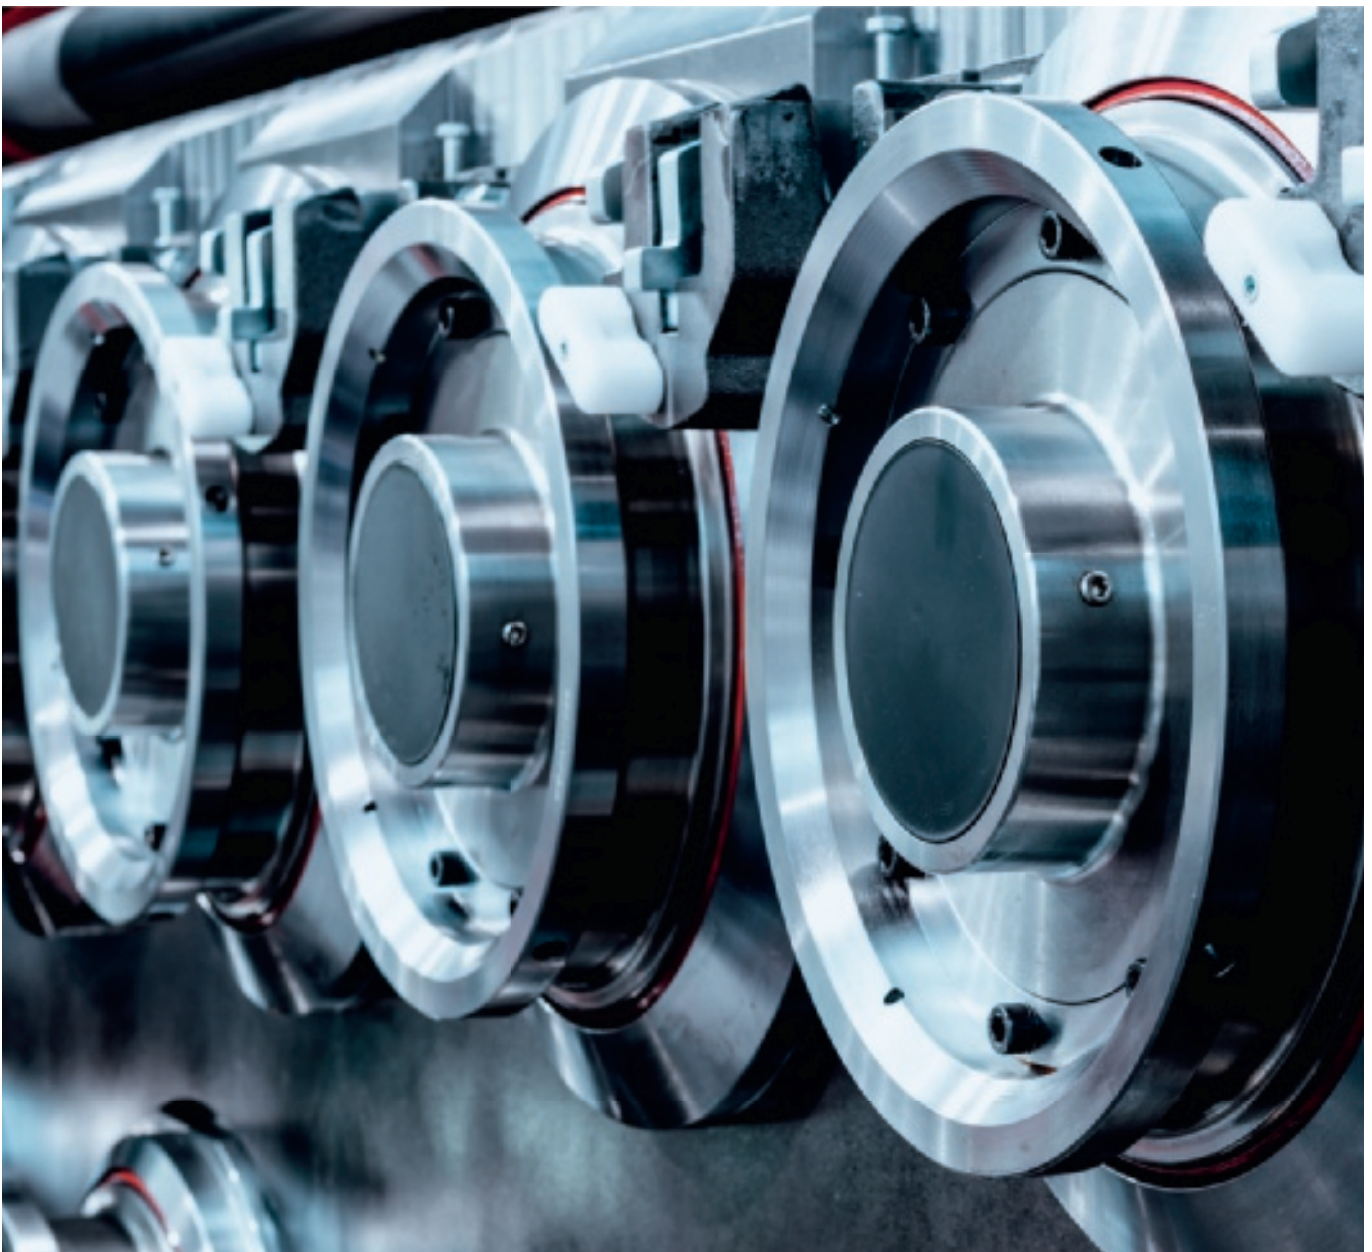
**APPLICATION**

Soluble concentrate developed for copper wire drawing operations. Excellent detergency properties which are particularly suitable for fine and super fine copper wire drawing operations.

**ADVANTAGES**

- Reduces the risk of wire breakage.
- Very good biostability.
- Low foaming.
- Allows a clean finish.
- Good filtration.
- Corrosion resistance.

PRODUCT NAME	APPEARANCE IN DILUTION	CONCENTRATION %	PH AT 5%	REFRACTOMETER FACTOR	AVAILABLE PACKAGING
					Drum 208 L 
Supradraw 411	Colorless	2-7%	9.6	2.1	110553





# HEAT TREATMENT

In the light of extensive expertise, and being a crucial member of the A3TS Heat Treatment Association, MotulTech offers a range covering all applications from cold quenching with an aqueous quenching polymer to hot quenching at 180°C. This range is the result of a long joint development program with heat treatment specialists. The search for high performance and productivity, with the respect for users and the environment, are the key factors. MotulTech technical experts will share their knowledge with the fundamental aim of assisting in your process improvement programmes by combining expertise with a comprehensive range of Heat Treatment products and services.




## COLD QUENCHING THERMIC TO 10

**APPLICATION**

Quenching of parts of simple geometry, made of good quenching power steel.

**ADVANTAGES**

- Excellent thermic shock resistance.
- Reduced calefaction area.
- Reduced fire risks thanks to its high flash point.
- Range of working temperature: 30°C - 90°C.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L	
<i>Thermic TO 10</i>	28	220	<i>Normal</i>	109467	




## COLD QUENCHING THERMIC TO 19 R

**APPLICATION**

Quenching of parts of complex geometry, made of semi-hard carbon steel, low to medium alloyed.

**ADVANTAGES**

- Reduced strain and crack risks.
- Excellent thermic shock resistance.
- Reduced calefaction area.
- Reduced fire risks thanks to its high flash point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
<i>Thermic TO 19 R</i>	29	218	<i>Accelerate</i>	108497	109498





## COLD QUENCHING THERMIC TO 20 R

### APPLICATION

Quenching of steels or alloyed steels of low hardening capacity.

### ADVANTAGES

- Reduced strain and crack risks.
- Excellent thermic shock resistance.
- Reduced calefaction area.
- Reduced fire risks thanks to its high flash point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Thermic TO 20 R	22	> 190	Very accelerate	106824	104959





## COLD QUENCHING THERMIC TO 26 R

### APPLICATION

Quenching of alloyed or non-alloyed steels, semi-hard or hard to treat with complex geometry.

### ADVANTAGES

- Reduced strain and crack risks.
- Excellent thermic shock resistance.
- Reduced calefaction area.
- Reduced fire risks thanks to its high flash point.
- Range of working temperature: 30°C - 90°C.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Thermic TO 26 R	27	> 210	Very accelerate	109328	109329





## COLD QUENCHING THERMIC INO 130

### APPLICATION

Very accelerated cold quenching oil formulated on the basis of synthetic base stocks coming from natural gas.  
Designed for heat treatment of alloyed or non-alloyed steel parts.

### ADVANTAGES

- Reduced evaporation.
- Minimise deformation and cracks risks.
- Very short vapor phase on cooling curve.
- Very good resistance to oxidation.
- Fire risks reduced thanks to its high flash point.
- Low consumption.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Thermic INO 130	22	> 230	Very accelerate	109994	110592





## COLD QUENCHING THERMIC EVO 140

**APPLICATION**

Quenching oil formulated from highly refined base oils, especially adapted for heat treatment of parts in non-alloyed and alloyed steels with bad hardenability.

**ADVANTAGES**

- Use temperature: 40-70°C.
- Minimum loss on parts thanks to its fluidity.
- Low evaporation.
- Reduced deformation and cracks risks.
- Excellent resistance to oxidation.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Thermic EVO 140	13	> 185	Very accelerate	110256	110257





## SEMI-HOT QUENCHING THERMIC 15

**APPLICATION**

Martensitic quenching of light geometry parts made of low to medium alloyed steels for mechanic construction.

**ADVANTAGES**

- Reduced strain and crack risks.
- Excellent thermic shock resistance.
- Cost effective product, thanks to its fluidity at working temperature.
- Optimised production due to the stability of quenching power.
- Reduced fire risks thanks to its high flash point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Thermic 15	40	> 230	Slightly accelerate	108778	108770





## SEMI-HOT QUENCHING THERMIC 30 R

**APPLICATION**

Semi-hot quenching oil recommended for the quenching of steels or alloyed steels, with low hardening capacities.

**ADVANTAGES**

- Reduced strain and crack risks.
- Excellent thermic shock resistance.
- Cost effective product, thanks to fluidity at working temperature.
- Reduced calefaction area.
- Reduced fire risks thanks to its high flash point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Thermic 30 R	28	> 210	Very accelerate	109330	109331






## SEMI-HOT QUENCHING **THERMIC INO 235**

**APPLICATION**

Semi-hot neat quenching oil formulated on the basis on synthetic base stocks coming from natural gas. Designed for quenching of steels with bad hardenability.

**ADVANTAGES**

- Reduced deformation and cracks risk.
- Excellent resistance to oxidation.
- Reduced calefaction area.
- Reduced fire risks thanks to its high flash point.
- Low consumption.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L	
Thermic INO 235	25	> 222	Very accelerate	110096	



## HOT QUENCHING **THERMIC 100**

**APPLICATION**

Heat treatment of alloyed steels and semi-alloyed steels: case hardening of low to medium alloyed steels, carburizing of low alloyed steels, and hot quenching of carbon hard steels. Approved by PEUGEOT CITROEN.

**ADVANTAGES**

- Reduced strain and crack risks.
- Excellent thermal stability.
- High quenching speed.
- Even results due to stable viscosity.
- Reduced fire risks thanks to its high flash point.
- Low consumption due to fluidity, reduced drag-out losses.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L	IBC 1000 L
Thermic 100	123	> 245	Accelerate	109282	109283




## HOT QUENCHING **THERMIC 100 FC**

**APPLICATION**

Quenching of low and medium alloyed steels with complex shape.

**ADVANTAGES**

- Wide range of use temperature: 80-160°C.
- Reduced strain and crack risks.
- Excellent thermal stability.
- Uniformed results.
- Reduced fire risks thanks to its high flash point.
- Low consumption.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L	
Thermic 100 FC	111	264	Very accelerate	108898	





## VACUUM QUENCHING THERMIC SV 6

**APPLICATION**

Vacuum heat treatment and quenching oil incorporated on all kind of parts, every size and geometry.

**ADVANTAGES**

- Constant cooling power.
- Leaves no stain on the parts.
- Simplified and economical waste treatment.
- Excellent oxidation and cracking resistance.
- Working temperature: 30°C-130°C.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				DRUM 208 L 	IBC 1000 L 
Thermic SV 6	35	244	Normal	108495	108496




## VACUUM QUENCHING THERMIC EVO 420

**APPLICATION**

Accelerated quenching oil formulated from highly refined base oils dedicated to carbon steels and alloyed steels vacuum quenching. It can also be used in BATCH furnaces for quenching, cementation and carbonitriding operations.

**ADVANTAGES**

- Use temperature: 50-130°C.
- Minimum loss on parts thanks to its fluidity.
- Reduced deformation and cracks risks.
- Excellent resistance to oxidation.
- Reduced fire risks due to its high flash point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				IBC 1000 L 	
Thermic EVO 420	29	> 220	Accelerate	109707	



## VACUUM QUENCHING THERMIC EVO 430

**APPLICATION**

Very accelerated quenching oil formulated from highly refined base oils dedicated to bad hardenability steels vacuum quenching. It can also be used in BATCH furnaces for quenching, cementation and carbonitriding operations.

**ADVANTAGES**

- Use temperature: 50-130°C.
- Minimum loss on parts thanks to its fluidity.
- Reduced deformation and cracks risks.
- Excellent resistance to oxidation.
- Reduced fire risks due to its high flash point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	FLASH POINT °C	COOLING SPEED	AVAILABLE PACKAGING	
				IBC 1000 L 	
Thermic EVO 430	29	> 220	Very accelerate	110019	






## SUPERFICIAL QUENCHING THERMIC SH 615

**APPLICATION**

Soluble quenching polymer designed for superficial quenching and heating by induction or conduction. Can also be used for tempering stop.

**ADVANTAGES**

- Formaldehyde free.
- Economic: low concentration in use.
- Wide range of use allowing treatment of different steels.
- Very good resistance to microorganisms (bacteria and fungi).
- Good protection against corrosion (machine parts and quenched parts).
- Easy cleaning of quenched parts.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	PH AT 10%	REFRACTOMETER FACTOR	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 209 L 	IBC 1000 L 
Thermic SH 615	62	9.3	2.5	104374	100777	100778



## INDUCTION QUENCHING THERMIC SP

**APPLICATION**

Water soluble, synthetic liquid, used diluted in water for surface hardening operations which facilitates efficient protection against the corrosion of the treated parts as well as machine parts.

**ADVANTAGES**

- Product stable in service.
- Can be used in several water hardness.
- Leaves no deposit on the parts.
- Excellent filterability.
- Strong resistance to microorganisms.

PRODUCT NAME	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
		JERRYCAN 20 L 	DRUM 208 L 
Thermic SP	3.3	107289	108499



## BLACKENING THERMIC B

**APPLICATION**

Tempering stop and blackening operations. Suitable for tempering stop of small parts not sensitive to distortion. Suitable for blackening and corrosion protection of steel parts.

**ADVANTAGES**

- Odourless fine emulsion.
- Good stability in use.
- Boron free.
- Good protection against corrosion.

PRODUCT NAME	REFRACTOMETER FACTOR	AVAILABLE PACKAGING	
		DRUM 208 L 	IBC 1000 L 
Thermic B	1.1	107909	110526



## MASS QUENCHING THERMIC FGP

**APPLICATION**

Water soluble synthetic fluid for mass quenching. Can be diluted between 10% to 25%, according to steels shades to be treated. Recommended bath temperature between 25°C and 45°C.

**ADVANTAGES**

- Reduced fire risks and smokes emissions.
- Reduced cracking risks.
- Stable in use.
- Reduced consumption.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	AVAILABLE PACKAGING	
		DRUM 210 KG 	IBC 1022 KG 
Thermic FGP	247	100776	102009




## QUENCHING BOOSTER THERMIC BOOST

**APPLICATION**

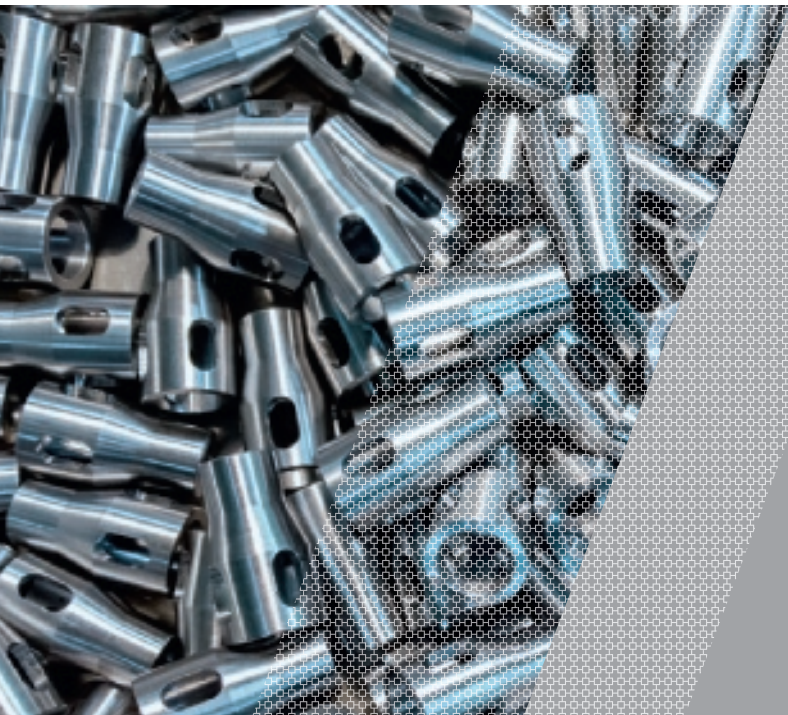
Quenching performance enhancer for heat treatment applications, compatible with all neat quenching lubricants from THERMIC range. Developed to keep the quenching oil properties stable.

**ADVANTAGES**

- Compatible with our THERMIC range.
- Keep the physico-chemical properties of the quenching oil.
- Very high thermal shock resistance.
- Lower the consumption.
- No labelling.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	AVAILABLE PACKAGING
		DRUM 208 L 
Thermic Boost	176	110562





# CLEANERS

Crucial and common place in all the workshops, cleaning products have to offer optimal cleaning performance while presenting the least possible risks for the industrial and the users. They have to meet stringent requirements such as strong degreasing power, compatibility with the materials to clean and low health & safety risks. The new formulas of cleaners allow the industrials to find the balance between these seemingly contradictory requirements. The MotulTech range offers solutions that cover most of the needs of industrials, in full conformity with the current legislation.



## SOLVENT CLEANER **SAFCO KLEAN 21**

### APPLICATION

Degreasing solvent for:

- Degreasing mechanical and plastic parts.
- Cleaning of excess glue or resin.
- Preparation of surfaces prior to bonding or painting.
- Cleaning polluted electrical equipment.
- Maintenance in food processing environments.

### ADVANTAGES

- Fast evaporation.
- High purity index.
- Excellent degreasing solvent suitable for considerable levels of pollution.
- Large field of applications.

PRODUCT NAME	SOLVENT POWER (KB INDEX)	COPPER CORROSION	FLASH POINT °C	EVAPORATING RATE	AVAILABLE PACKAGING	
					JERRYCAN 25 L 	DRUM 200 L 
Safco Klean 21	90	1a	23	9 min	104542	106130






## SOLVENT CLEANER **SAFCO KLEAN 53**

### APPLICATION

Degreasing solvent for metallic parts cleaning in food processing environment.

### ADVANTAGES

- NSF approval.
- Odourless.
- Operator friendly.
- Advanced solvency properties facilitating the good decantation of pollutants.

PRODUCT NAME	SOLVENT POWER (KB INDEX)	COPPER CORROSION	FLASH POINT °C	EVAPORATING RATE	AVAILABLE PACKAGING		
					JERRYCAN 25 L 	DRUM 200 L 	IBC 1000 L 
Safco Klean 53	45	1a	30	15 min	110118	110119	100848



## SOLVENT CLEANER SAFCO KLEEN 60




**APPLICATION**

Mechanical parts, metal or plastics cleaning of:

- Metal working oils, fat or soap greases.
- Temporary protection products.
- Polluted substrates, organic or inorganic compounds.
- Polluted electrical equipment and electric motors.

**ADVANTAGES**

- Compatible with all metals, including coated or precious metals.
- Compatible with most thermoplastics and plastics.
- Can be used on most composites.
- High flash point.

PRODUCT NAME	SOLVENT POWER (KB INDEX)	COPPER CORROSION	FLASH POINT °C	EVAPORATING RATE	AVAILABLE PACKAGING		
					JERRYCAN 25 L 	DRUM 200 L 	IBC 1000 L 
Safco Kleen 60	33	1a	56	42 min	104540	106180	104637



## SOLVENT CLEANER SAFCO KLEEN 92



**APPLICATION**

Multi-purpose cleaning product for:

- Cleaning of non-polymerized excess glues or resins.
- Cleaning of ink.
- Surface preparation.
- Defluxing.

**ADVANTAGES**

- Multi-purpose.
- Product without flash point.
- Fast evaporation.
- Compatible with metals, some plastics and elastomers.

PRODUCT NAME	SOLVENT POWER (KB INDEX)	COPPER CORROSION	FLASH POINT °C	EVAPORATING RATE	AVAILABLE PACKAGING	
					JERRYCAN 25 L 	DRUM 200 L 
Safco Kleen 92	113	1a	na	15 min	110094	110095




## SOLVENT CLEANER SAFCO KLEEN VF 150

**APPLICATION**

Fountain degreasing fluid. Removal of all used lubricants, metalworking fluids (soluble and neat), protection fluids, tars...

**ADVANTAGES**

- VOC free.
- Odourless.
- Vegetable oil base.
- Non-flammable.
- Good dermatological behaviour.
- Good compatibility with all materials.

PRODUCT NAME	SOLVENT POWER (KB INDEX)	COPPER CORROSION	FLASH POINT °C	EVAPORATING RATE	AVAILABLE PACKAGING
					DRUM 200 L 
Safco Kleen VF 150	50	1a	103	Does not evaporate	102521



## SOLVENT CLEANER **SAFCO KLEEN VF 200**

**APPLICATION**

Technical fluid specifically developed to replace petroleum and chlorinated solvents in their applications to cold or hot surface. Suitable for sensitive materials and confined environments. Cleaning or degreasing of mechanical parts or machining fluid residues.

**ADVANTAGES**

- Vegetable ester based.
- VOC free.
- Non-flammable. Flash point over 170°C, avoiding any ATEX risks.
- Compatible with most materials, metals, plastics, elastomers, rubber, painted surfaces.

PRODUCT NAME	SOLVENT POWER (KB INDEX)	COPPER CORROSION	FLASH POINT °C	EVAPORATING RATE	AVAILABLE PACKAGING
					DRUM 200 L 
Safco Kleen VF 200	> 100	1a	> 170	Does not evaporate	103126



## SOLVENT CLEANER **SAFCO KLEEN V**

**APPLICATION**

Cleaning solvent based on aliphatic hydrocarbons with a high flash point. Adapted for cleaning in vacuum machines in replacement of chlorinated solvents.

**ADVANTAGES**

- Alternative to chlorinated solvents.
- Compatible with all metals, alloys, glass and ceramic.
- Efficient cleaning thanks to its formulation based on aliphatic hydrocarbons.
- A3 class solvent with a high flash point.
- Compatible with most plastics, elastomers and painted surfaces.

PRODUCT NAME	VISCOSITY AT 40°C	FLASH POINT °C	BOILING TEMPERATURE AREA °C	AVAILABLE PACKAGING
				DRUM 200 L 
Safco Kleen V	1.1	> 55	171 - 191	108196



## SOLVENT CLEANER **SAFCO KLEEN INO 230**

**APPLICATION**

High-performance degreasing agent specifically developed to replace petroleum and chlorinated solvents in their applications to cold or hot surface.

**ADVANTAGES**

- Strong degreasing power.
- Biodegradable: 100% vegetable origin formula.
- Non-flammable, with a flash point of 120°C, it avoids any ATEX risks.
- Compatible with most materials, metals, plastics, elastomers, rubber, painted surfaces.

PRODUCT NAME	SOLVENT POWER (KB INDEX)	FLASH POINT °C	EVAPORATING RATE	BIODEGRADABILITY	AVAILABLE PACKAGING
					JERRYCAN 20 L 
Safco Kleen INO 230	> 200	120	Does not evaporate	> 80%	109789







## AQUEOUS CLEANER **SAFKLEEN 1112**

**APPLICATION**

Water-based cleaner used as a brightener deoxidizer for steels and ferrous materials.

**ADVANTAGES**

- Remarkable brightening properties.
- Easy to rinse.
- Use at low temperature.
- Can be used with any type of water.
- Boron free.
- Very good biostability.

PRODUCT NAME	PH PURE	TEMPERATURE °C	CONCENTRATION %	MATERIALS	AVAILABLE PACKAGING	
					JERRYCAN 21.5 L 	DRUM 172 L 
Safkleen 1112	< 2	20 - 60	5 - 30	Ferrous & Aluminum	110343	110355



## AQUEOUS CLEANER **SAFKLEEN 221**

**APPLICATION**

Alkaline water-based cleaner used by dipping or spraying for interoperational degreasing of ferrous metals.

**ADVANTAGES**

- Protects parts effectively.
- Easy to rinse.
- Low foaming.
- Can be used with any type of water.
- Boron and phosphate free.
- Very good biostability.

PRODUCT NAME	PH PURE	TEMPERATURE °C	CONCENTRATION %	MATERIALS	AVAILABLE PACKAGING	
					JERRYCAN 24 L 	DRUM 202 L 
Safkleen 221	11.2	40 - 70	1 - 10	Ferrous	110361	110360




## AQUEOUS CLEANER **SAFKLEEN 224**

**APPLICATION**

Non-nitrite, water-based degreaser that can be used by spraying or up to a pressure of 5 bar. Used in the automotive and mechanical industries. Suitable for removing all types of oil.

**ADVANTAGES**

- Protects parts effectively.
- Easy to rinse.
- Low foaming.
- Can be used with any type of water.
- Boron and phosphate free.
- Very good biostability.
- Biodegradable.

PRODUCT NAME	PH PURE	TEMPERATURE °C	CONCENTRATION %	MATERIALS	AVAILABLE PACKAGING
					JERRYCAN 24.5 L 
Safkleen 224	9.7	20 - 60	0.5 - 3	All metals	110541





## AQUEOUS CLEANER **SAFKLEEN 234**

**APPLICATION**

Water-based cleaner that can be used, either by spraying or by ultrasonic immersion, for the degreasing and the temporary passivation of all types of metals.

**ADVANTAGES**

- Corrosion protection.
- Easy to rinse.
- Low foaming.
- Can be used with any type of water.
- Boron and phosphate free.
- Very good biostability.

PRODUCT NAME	PH PURE	TEMPERATURE °C	CONCENTRATION %	MATERIALS	AVAILABLE PACKAGING	
					JERRYCAN 24 L 	DRUM 192 L 
Safkleen 234	10.5	30 - 60	1 - 5	All metals	110359	110358





## AQUEOUS CLEANER **SAFKLEEN 334**

**APPLICATION**

Caustic free water-based cleaner used for degreasing by spraying on aluminum, iron, cast iron, zinc, copper and its alloys, contaminated by greases and mineral oils.

**ADVANTAGES**

- Protection against oxidation.
- Easy to rinse.
- Fully organic.
- Use at low temperature.
- Can be used with any type of water.
- Boron and phosphate free.
- Very good biostability.

PRODUCT NAME	PH AT 5%	TEMPERATURE °C	CONCENTRATION %	MATERIALS	AVAILABLE PACKAGING	
					JERRYCAN 24 L 	DRUM 192 L 
Safkleen 334	8.9	30 - 50	1 - 4 (Al and Zn) 5 - 15 (Ferrous)	All metals	110363	110362



## AQUEOUS CLEANER **SAFKLEEN 334 F**

**APPLICATION**

Water-based cleaner that can be used, either by spraying or by ultrasonic immersion, for the degreasing and the temporary passivation of ferrous metals and yellow alloys.

**ADVANTAGES**

- Protection against oxidation.
- Easy to rinse.
- Fully organic.
- Boron and phosphate free.
- Very good biostability.
- Biodegradable.

PRODUCT NAME	PH AT 4%	TEMPERATURE °C	CONCENTRATION %	MATERIALS	AVAILABLE PACKAGING	
					JERRYCAN 24.5 L 	DRUM 206 L 
Safkleen 334 F	8	50 - 70	1 - 8	All metals	110365	110364





## AQUEOUS CLEANER **SAFKLEEN 421**

**APPLICATION**

Alkaline water-based cleaner used by spraying for degreasing and removal of oils, greases, stearates and crystalline phosphate layers on ferrous materials and steels.

**ADVANTAGES**

- Adapted to the fasteners market.
- Powerful degreasing.
- Easy to rinse.
- Boron free.
- Very good biostability.
- Biodegradable.

PRODUCT NAME	PH AT 1%	TEMPERATURE °C	CONCENTRATION %	MATERIALS	AVAILABLE PACKAGING	
					JERRYCAN 18,5 L 	DRUM 155 L 
Safkleen 421	12.4	50 - 70	3 - 10	Ferrous	110374	110373





# RUST PREVENTATIVES

Formulated with the latest generation of anti-corrosion additives and deodorized solvents, MotulTech's MT Protect range meets the performance, durability and health & safety requirements of operators.

The MotulTech range of rust preventatives, formulated with barium-free additives, offers a range of high-performance solutions for industrial metal protection. All the solvent-based protection products of the range have, first and foremost, a water-repellent action. It enables the application of anti-corrosion compounds on a perfectly dry surface, the first step for an effective protection against corrosion. The choice of the product will then be made according to the duration of protection sought, the storage and transport conditions of the part, the drying speed of the rust preventative.



## SHORT-TERM PROTECTION MT SOLV PROTECT

**APPLICATION**

Highly water repellent fluid for corrosion protection of metal parts or assemblies. Recommended for interoperation or short-term corrosion prevention of metallic parts or components.

**ADVANTAGES**

- Prevents corrosion of metal parts by hand contact.
- Repels water from part very quickly.
- Fast evaporation rate.
- Well adapted for interoperation protection.
- Without barium or hazardous components.
- Based on low odor raw materials.

PRODUCT NAME	FILM THICKNESS (MICROMETER)	FLASH POINT °C	EVAPORATION SPEED	AVAILABLE PACKAGING		
				JERRYCAN 20 L 	DRUM 200 L 	IBC 1000 L 
MT Solv Protect	0.5	> 70	Fast	105806	105807	-




## MEDIUM-TERM PROTECTION MT OIL PROTECT

**APPLICATION**

Oily fluid, water repellent, for short to medium-term protection of metal parts.

**ADVANTAGES**

- Repels water from parts very quickly.
- Prevents corrosion of parts by hand contact.
- Good demulsification.
- Well suited to the interoperation protection.
- Without barium or hazardous components.
- Based on low odour materials.

PRODUCT NAME	FILM THICKNESS (MICROMETER)	FLASH POINT °C	EVAPORATION SPEED	AVAILABLE PACKAGING	
				JERRYCAN 20 L 	DRUM 200 L 
MT Oil Protect	7	> 204	Moderate	105573	105574



## MEDIUM-TERM PROTECTION MT LIGHT OIL PROTECT

**APPLICATION**

Oily fluid, water repellent, for short to medium-term protection of metal parts.

**ADVANTAGES**

- Thin oily film allowing the control of protected parts.
- Easily sprayable.
- Repels water from parts quickly.
- Prevents corrosion of parts by handling with bare hands.
- Good desemulsification.
- Well suited to the interoperation protection.

PRODUCT NAME	FILM THICKNESS (MICROMETER)	FLASH POINT °C	VISCOSITY AT 40°C (CST)	AVAILABLE PACKAGING	
				JERRYCAN 20 L 	DRUM 200 L 
MT Light Oil Protect	7	> 115	4.2	108751	108752





## LONG-TERM PROTECTION MT STORE PROTECT

**APPLICATION**

Waxy rust preventative fluid, for medium to long-term protection of metallic parts and assemblies stored indoor or outdoor under shelter.

**ADVANTAGES**

- Medium to long-term protection.
- Repels water from parts very quickly.
- Slow evaporation rate.
- Fast desemulsification.
- Without barium or hazardous components.
- Based on low odour raw materials.

PRODUCT NAME	FILM THICKNESS (MICROMETER)	FLASH POINT °C	EVAPORATION SPEED	AVAILABLE PACKAGING	
				JERRYCAN 20 L 	DRUM 200 L 
MT Store Protect	2	> 114	Moderate	105798	105799




## LONG-TERM PROTECTION MT SHIP PROTECT

**APPLICATION**

Waxy fluid, highly water repellent, for long-term protection in difficult conditions of metals parts and assemblies. Recommended for long-term protection of metal parts, for storage or shipping.

**ADVANTAGES**

- Long-term protection in difficult conditions.
- Prevents corrosion of metal parts for storage or shipping.
- Repels water from parts very quickly.
- Fast evaporation rate.
- Fast desemulsification from water.
- Without barium or hazardous components.

PRODUCT NAME	FILM THICKNESS (MICROMETER)	FLASH POINT °C	EVAPORATION SPEED	AVAILABLE PACKAGING	
				JERRYCAN 20 L 	IBC 1000 L 
MT Ship Protect	4.5	> 74	Fast	105805	106671



## PART 2

## MAINTENANCE LUBRICANTS

## 03

GENERAL LUBRICATION -  
MAINTENANCE FLUIDS

PAGE 54-77 &gt;

HYDRAULIC FLUIDS	56
MULTIFUNCTIONAL OILS	62
GEAR OILS	64
SLIDEWAY OILS	66
SPINDLE OILS	68
CHAIN OILS	70
COMPRESSOR OILS	72
FOOD GRADE OILS	74
HEAT TRANSFER OILS	77

*As for all pieces of industrial equipment, lubrication plays a key role in optimising performance and minimizing downtime. Furthermore today's equipment are more sophisticated and environmental regulations are more demanding. That is why MotulTech offers a complete line of complementary lubrication products which have all been thoroughly designed to satisfy all specific needs of modern industry. Each product is the result of a long collaboration with industrial specialists. We listen to their demands and our experts develop lubricants that helps to improve our customer's industrial equipment in terms of maximised performance, reduced operating costs and increased production efficiency.*



# HYDRAULIC FLUIDS

Our first-class hydraulic oils meet all demands towards a modern oil. Whether it is about high viscosity index, perfect wear protection properties, optimum protection against corrosion or biodegradability, you will always find the right lubricant in our wide range.



**APPLICATION**




Anti-corrosive and anti-oxidative hydraulic and circulating oil.

**ADVANTAGES**




- Excellent anti-wear, anti-oxidation and anti-corrosion properties.
- Excellent anti-foam properties.
- Very good stability against hydrolysis.
- High thermal stability.
- Higher system efficiency, less service down-time.
- Extended equipment's life.

**PERFORMANCES**

ISO 11158 category HL; ISO 6743-4 category HL  
DIN 51524 part 1, HL  
NF E 48603 HL

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 4x5 L 	JERRYCAN 20 L 	DRUM 208 L 
Rubric AW 22	22	4.4	109	-28	212	108162	104628	108460

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						DRUM 208 L 	IBC 1000 L 
Rubric B 46	46	6.7	100	-33	218	108462	109668

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric EE 150	150	14.4	98	-15	198	104629	108465	107162





## HM-HLP MINERAL RUBRIC HM

### APPLICATION




Anti-wear, anti-corrosion and anti-oxidation, high performance hydraulic oil for hydraulic systems working under severe conditions.

### ADVANTAGES

- Less downtime, higher productivity.
- Excellent anti-wear quality.
- Excellent resistance to oxidation.
- Excellent protection against corrosion.
- Excellent thermal and hydrolysis stability.
- Excellent demulsification and filterability.

### PERFORMANCES

DENISON HF-0  
ISO 11158 categories HM; ISO 6743-4 categories HM  
DIN 51524 part 2, HLP  
NF E 48603 HM

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric HM 32	32	5.4	106	≤ -24	≥ 210	108832	108838	108841
Rubric HM 46	46	6.9	110	≤ -24	≥ 215	108794	108795	108835
Rubric HM 68	68	8.8	104	≤ -21	≥ 225	108776	108789	108791
Rubric HM 100	100	11	94	-18	276	104269	101780	101781



## HM-HLP MINERAL RUBRIC HLPD

### APPLICATION




Hydraulic fluid based on mineral oil with detergent and dispersant qualities. Delivers reliable performance and ultimate cleanliness in applications contaminated by aqueous products such as metalworking fluids.

### ADVANTAGES

- Very good anti-wear properties.
- Excellent oxidation resistance.
- Excellent protection against corrosion.
- Very good cleaning and dispersing power.
- Zinc-free.
- Excellent thermal stability.
- Excellent filterability.

### PERFORMANCES

DIN 51524 part 2 (HLP)  
Daimler Chrysler DBL 6721  
Ortlinghaus test for wet running clutch-brake-units according to ON 9.2.19

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric HLPD 32	32	5.7	118	-33	216	107307	107308	110356
Rubric HLPD 46	46	7.2	115	-33	238	107309	107310	107333
Rubric HLPD 68	68	9.1	111	-33	238	107311	107312	109522



## HM ZINC-FREE MINERAL RUBRIC LX

### APPLICATION




Ash less (zinc-free) high performance hydraulic oil suitable for the lubrication of hydraulic systems working under severe conditions.

### ADVANTAGES

- Excellent anti-wear properties.
- Excellent oxidation resistance.
- Excellent corrosion protection.
- Excellent thermal and hydrolysis stability.
- Excellent demulsification and filterability.

### PERFORMANCES

DENISON HF-0  
ISO 11158 category HM; ISO 6743-4 category HM  
DIN 51524 part 2, HLP  
NF E 48603 HM

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric LX 32	32	5.5	103	-15	182	104281	107801	-
Rubric LX 46	46	6.7	109	-30	228	104280	107802	101791
Rubric LX 68	68	8.3	91	-33	258	104276	101792	101793




HYDRAULIC CLEAN PACKAGE  
**MINERAL**  
**RUBRIC R-CLEAN**

**APPLICATION**

Cleaner designed for use in mineral based hydraulic oils. Helps removing varnish and sludge from the hydraulic system in preparation for the introduction of RUBRIC CLEAN. First part of a Hydraulic Clean Package consisting in the cleaner RUBRIC R-CLEAN and RUBRIC CLEAN hydraulic oils.

**ADVANTAGES**

- Varnish build-up and sludge removing.
- Reduced equipment downtime when compared to manual cleaning.
- Compatible with mineral based lubricants.
- Reduced health and safety concerns in comparison to solvent based cleaners.
- Compatible with all common seal materials.

PRODUCT NAME	AVAILABLE PACKAGING
	BOTTLE 5 L 
Rubric R-Clean	104566



HYDRAULIC CLEAN PACKAGE  
**MINERAL**  
**RUBRIC CLEAN HM**

**APPLICATION**




Premium zinc-free anti-wear hydraulic oil designed to prevent varnish from depositing on internal system components in hydraulic systems. Second part of a Hydraulic Clean Package.

**ADVANTAGES**

- Prevents formation of varnish and sludge deposits.
- Extended pump protection.
- Lowers maintenance and downtime costs.
- Excellent wear, rust and corrosion protection.
- Excellent oxidation and thermal stability.
- Excellent filtration properties.
- Maintains cycle times with clean equipment.

**PERFORMANCES**

Parker Denison HF-0  
MAG IAS (ex Cincinnati Machine) P-68, P-69, P-70  
DIN 51524 part 1 (HL), part 2 (HLP)  
Eaton Brochure 03-401-2010

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric Clean HM 32	32	5.6	117	-33	230	106747	106748	-
Rubric Clean HM 46	46	6.7	103	-24	240	104484	104485	107163
Rubric Clean HM 68	68	9.3	110	-34	238	107017	107018	-



HM ZINC-FREE  
**MINERAL**  
**RUBRIC HV**

**APPLICATION**




Lubrication of hydraulic systems working under severe conditions and at low and high temperature.

**ADVANTAGES**

- Excellent anti-wear & anti-corrosion properties.
- Excellent oxidation resistance.
- Excellent desemulsion and filterability.
- Excellent thermal and hydrolysis stability.
- High viscosity index & very low pour point.

**PERFORMANCES**

DENISON HF-0  
ISO 11158 categories HV; ISO 6743-4 categories HV  
DIN 51524 part 3, HVLP  
NF E 48603 HV

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric HV 22	22	4.7	140	-45	204	104286	101784	-
Rubric HV 32	32	6.3	≥150	≤-36	≥200	108760	108870	108764
Rubric HV 46	46	7.9	≥145	≤-36	≥210	108767	108761	108768
Rubric HV 68	68	10.7	≥143	≤-30	≥210	108769	108796	108798



BIO  
**SYNTHETIC**  
**RUBRIC BIO 46**

**APPLICATION**




High performance hydraulic fluid based on synthetic esters with a high level of biodegradability (> 90% in 21 days). Recommended for all hydraulic systems.

**ADVANTAGES**

- Excellent thermal stability.
- Excellent anti-wear performance and oxidation resistance.
- Good filterability.
- Excellent desmulsion.
- High viscosity index.

**PERFORMANCES**

European Ecolabel  
Blue Angel approval  
Bosch Rexroth RE 90221-01

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 50 KG 	DRUM 190 KG 
Rubric BIO 46	46	7.9	186	-36	310	104418	100435	100436



BIO  
**SYNTHETIC**  
**RUBRIC BIO 46 S**

**APPLICATION**


High performance hydraulic fluid based on synthetic esters with a high level of biodegradability (> 90% in 21 days). Recommended for all hydraulic systems.

**ADVANTAGES**

- Excellent thermal stability.
- Excellent anti-wear performance and oxidation resistance.
- Good filterability.
- Excellent desmulsion.
- High viscosity index.
- High temperature stable.
- Behaves neutrally in conjunction with elastomers.

**PERFORMANCES**

European Ecolabel  
Blue Angel approval  
Bosch Rexroth RE 90221-01

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						DRUM 208 L 	
Rubric BIO 46 S	46	7.9	146	-36	310	103108	



BIO  
**SYNTHETIC**  
**RUBRIC BIO SYNT 46**

**APPLICATION**




Ester-based high performance biodegradable hydraulic fluid for all available hydraulic systems. High level of biodegradability (OECD 301B 90% after 28 days).

**ADVANTAGES**

- Year around use.
- Outstanding oxidation and thermal stability.
- Outstanding hydrolytic stability.
- Superior rust and corrosion protection.
- Anti-wear protection.
- Non-toxic and low odour.

**PERFORMANCES**

European Ecolabel  
Swedish Standard SS 15 54 34

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric BIO Synt 46	43.2	8.8	189	-41	292	108248	108249	108250






HVI  
**SYNTHETIC**  
**RUBRIC ARCTIC 26**

**APPLICATION**

High performance hydraulic fluid with a very high viscosity index for all year use in hydraulic equipments operating over a wide temperature range.

**ADVANTAGES**

- Allows very good start up performance of hydraulic equipment at very low temperatures.
- Good rust and corrosion protection.
- Very low pour point.
- Zinc-free anti-wear additives for exceptional equipment performance.
- Excellent oxidation stability.
- Outstanding viscosity control over a wide temperature range.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric Arctic 26	26.4	8.2	326	-56	242	108216	108215	108296





HFC  
**SYNTHETIC**  
**RUBRIC HFC 40**

**APPLICATION**

HFC fire-resistant hydraulic fluid for all areas where the risk of a fire hazard exists (steel industry, heat treatment shops...) and/or when a good biodegradability is important. Fulfills all requirements of the 7<sup>th</sup> Luxemburg Report.

**ADVANTAGES**

- Excellent fire resistance properties.
- High lubricity and anti-wear characteristics.
- Excellent corrosion protection.
- Long term stability.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						DRUM 208 L 	IBC 1000 L 
Rubric HFC 40	38	9	>150	-48	none	104505	104516



HFDU  
**SYNTHETIC**  
**RUBRIC HFDU 46 FM**

**APPLICATION**



Fire-resistant, biodegradable high quality synthetic hydraulic fluid for all hydraulic systems, lubrication and circulating system where EP characteristics are not required and/or where there are potential risks of fire and/or water contamination. Fulfills all requirements of the 7<sup>th</sup> Luxemburg Report.

**ADVANTAGES**

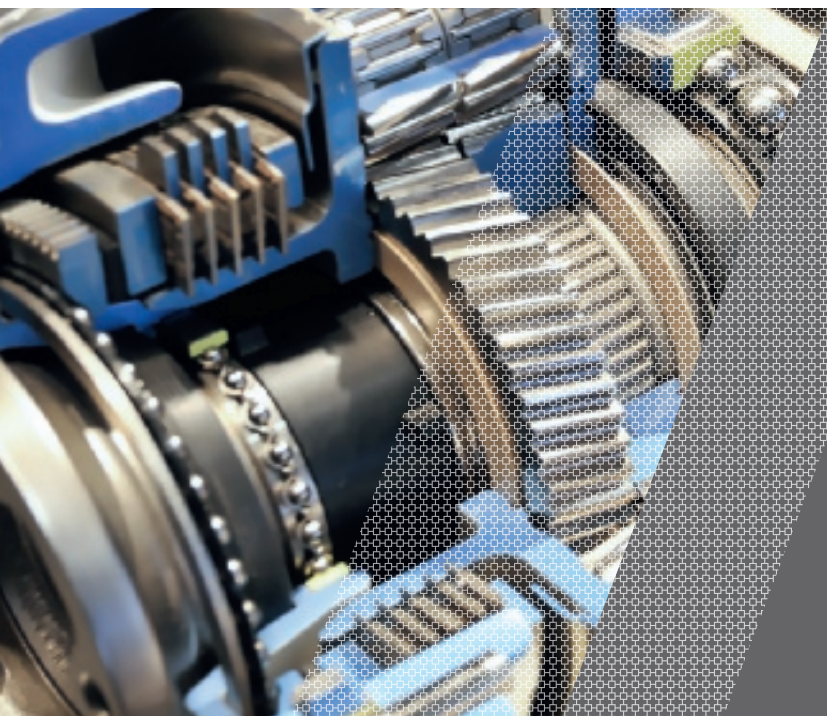
- Excellent resistance to combustion.
- Readily biodegradable.
- Zinc-free.
- Excellent demulsibility.
- Very good anti-rust and anti-corrosive properties.
- Excellent oxidation stability.

**PERFORMANCES**

ISO-HFD-U; ISO 6743/4 HM-HV; ISO 15 380, part 4  
VDMA 24568  
DIN 51524, part 3  
Vickers M-2952-S ; I-286-S  
FM approved

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	FLASH POINT °C	FIRE POINT °C	AVAILABLE PACKAGING	
					DRUM 200 L 	IBC 1000 L 
Rubric HFDU 46 FM	46	185	300	348	109618	109608





# MULTIFUNCTIONAL OILS

All-in-one lubricants for slideways, hydraulics and gears which was especially developed for machine owners that like to keep their lubricants stock easy to manage.



## MINERAL RUBRIC RU

### APPLICATION

Premium multifunctional oil for machine tools. Suitable for slideways, hydraulic and centralised lubrication systems.

### ADVANTAGES

- High demulsifiability with water soluble metalworking fluids.
- Corrosion resistant.
- Compatible with plastic coated ways (SKC).
- Low friction coefficient.
- Avoids Stick-Slip.
- Excellent adhesiveness.
- Anti-wear and extreme-pressure.
- Zinc-free.

### PERFORMANCES

#### SLIDEWAYS




ISO 11158 category HG;  
6 743-4 category HG ;  
6743-13 category G  
CINCINNATI MILACRON P-47, P-50, P-53

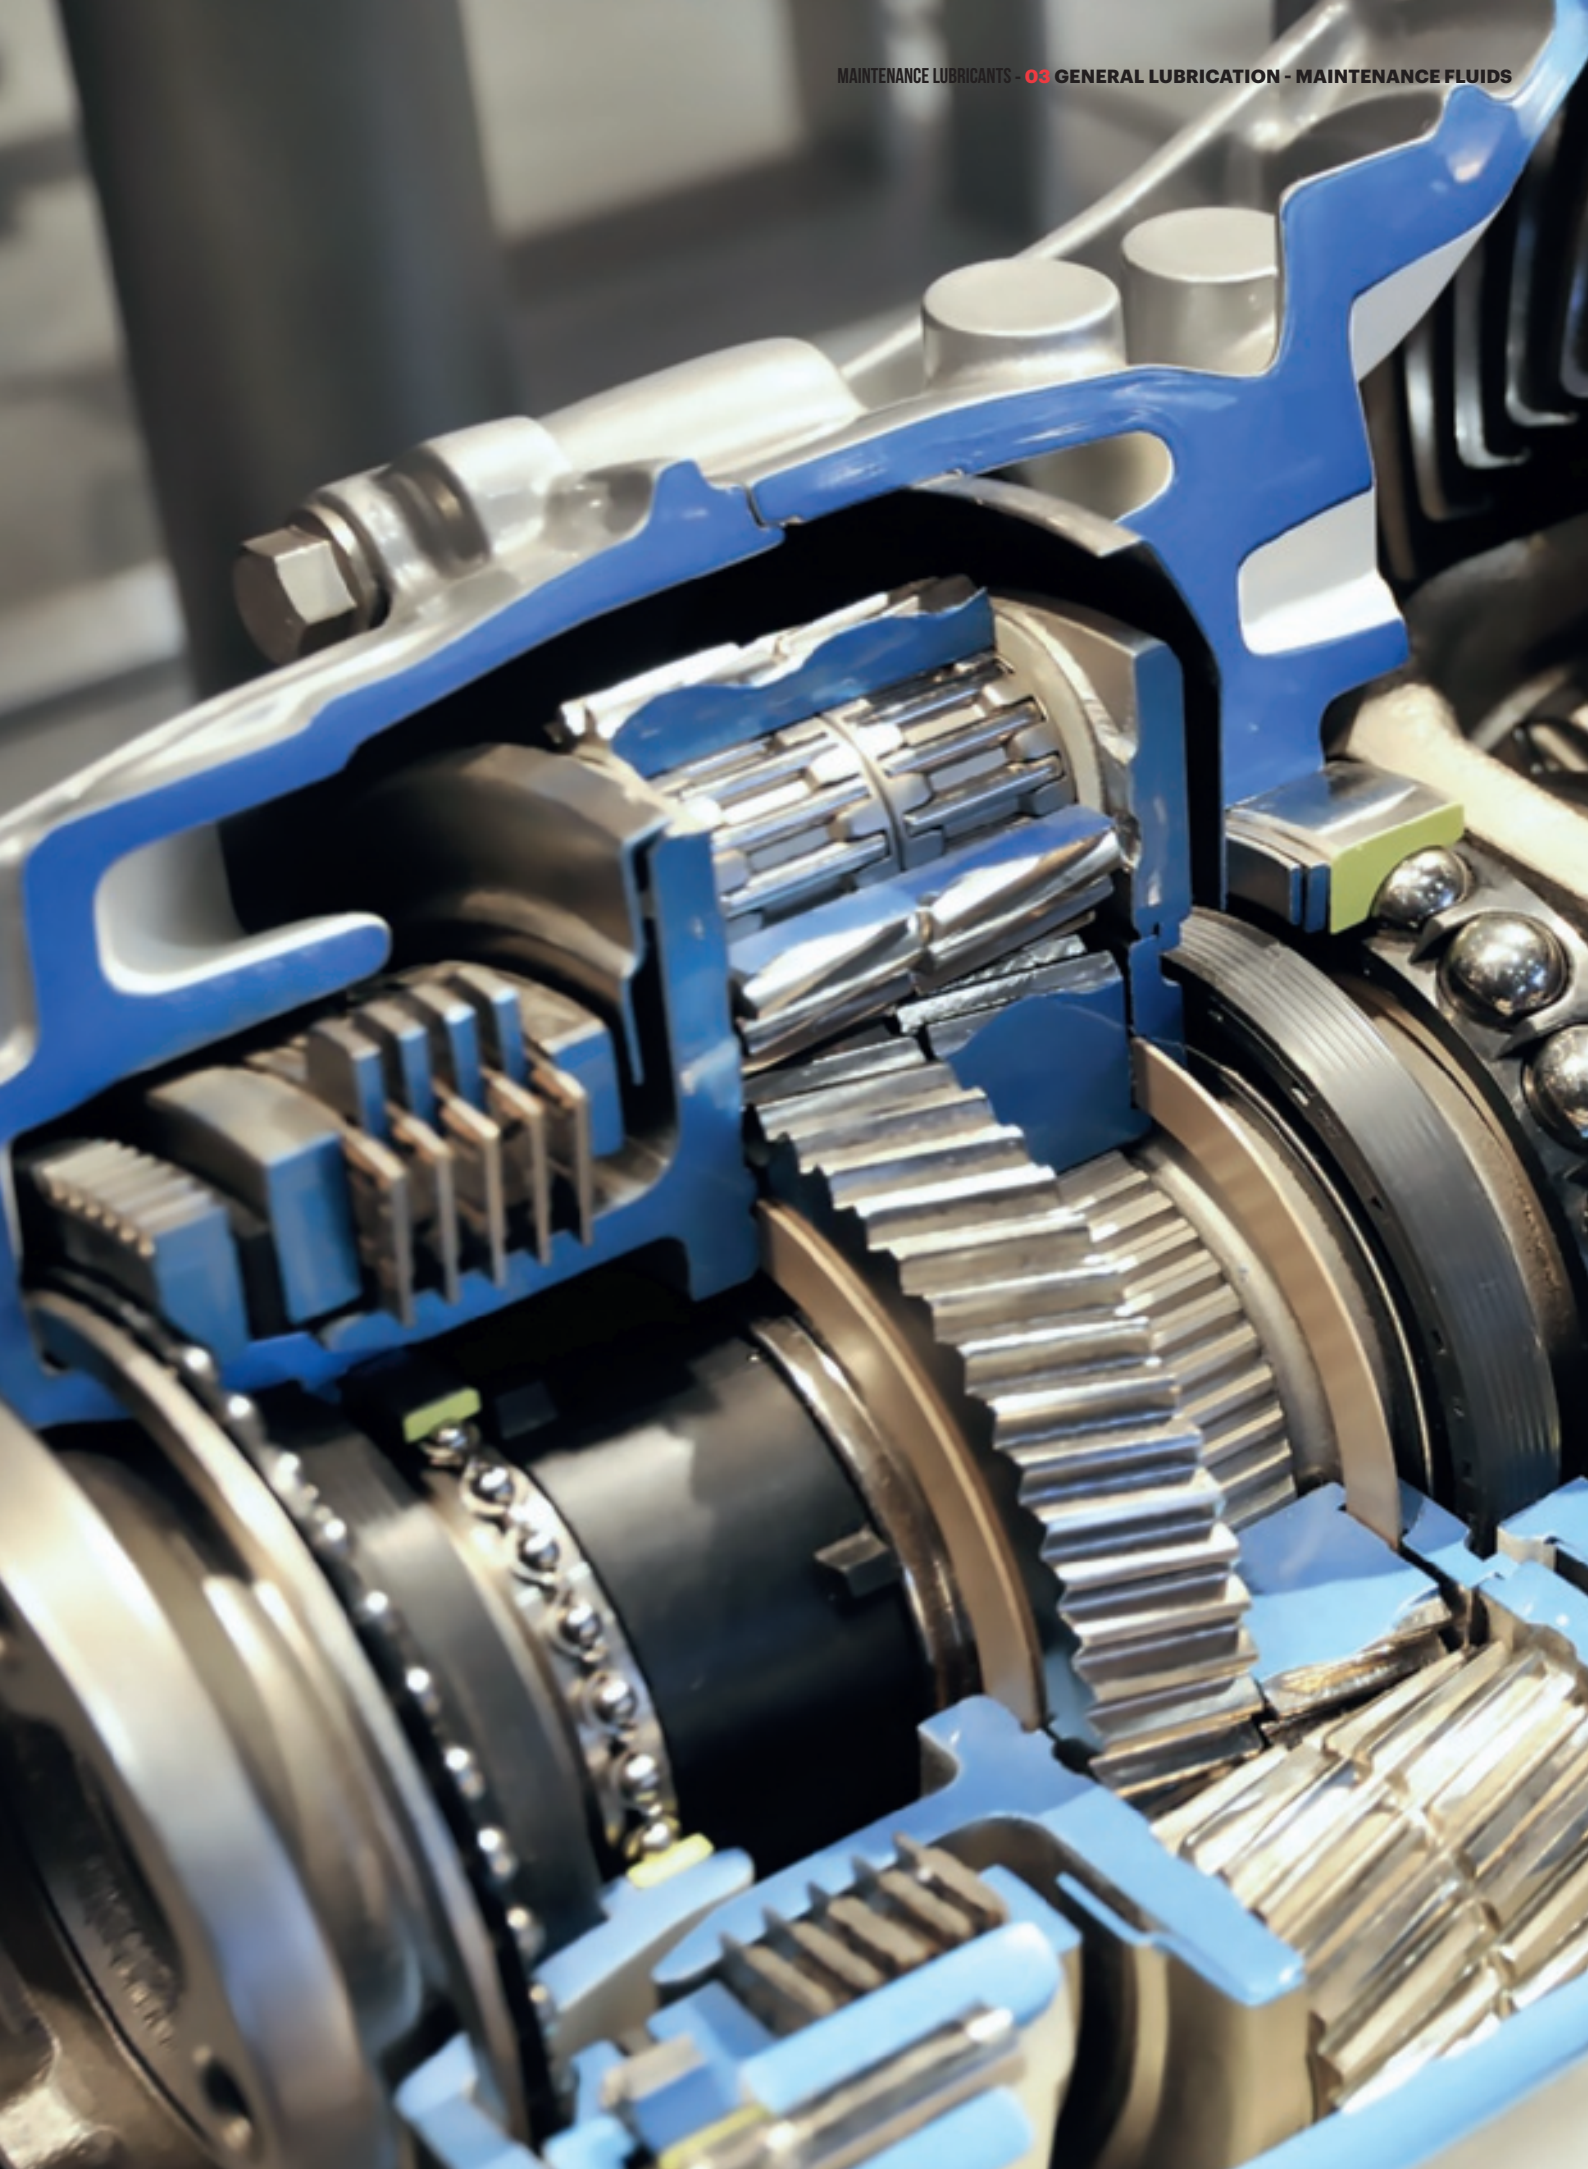
#### HYDRAULICS

ISO 11158 category HM  
ISO 6743-4 category HG  
ISO 6743-13 category G  
DIN 51524 part 2, HLP

#### GEARS

DIN 51517 part 3, CLP  
AGMA 9005 - E02

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Rubric RU 32	32	5.6	110	-36	230	104232	108486	110827
Rubric RU 46	46	6.9	106	-33	240	104249	108487	-





# GEAR OILS

Oils specifically made for transmissions, transfer cases and differentials in all types of industrial machinery. Our large selection of mineral and synthetic transmission lubricants has been developed for a wide variety of gear types. They meet all requirements - from standard applications to the most difficult operating conditions.



## MINERAL SUPRACO MPL

### APPLICATION




Extreme-pressure lubricant for all types of highly stressed gear drives. Lubrication of gear drives, reducers (except hypoid gears), worm gears, bearings and heavy loaded parts of machinery.

### ADVANTAGES

- Very high extreme-pressure and anti-wear properties.
- Very high resistance to oxidation.
- Non-corrosive lubricant for non-ferrous metals, particularly bronze alloys.
- Excellent water demulsibility.
- Zinc-free.

### PERFORMANCES

ISO 6743-6 and ISO 12925-1, catégorie CKC, CKD  
 DIN 51517 Part 3: 2004-01  
 AIST 224  
 AGMA 9005-E02  
 David Brown S1.53.101(E)  
 Strong FAG FE-8 performance

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supraco MPL 68	68	8.8	101	-24	242	108172	108173	-
Supraco MPL 100	104	11.9	103	-24	242	104268	108470	-
Supraco MPL 150	160	15.6	99	-21	242	104250	108472	108519
Supraco MPL 220	218	18.8	96	-18	238	104236	108473	108474
Supraco MPL 320	339	26.4	101	-15	236	104252	108476	-
Supraco MPL 460	475	31.9	99	-12	234	104354	108477	107803
Supraco MPL 680	641	35.2	87	-9	234	104323	108478	-





## SYNTHETIC GEAR SY

### APPLICATION



High performance synthetic oil with extreme-pressure properties for the lubrication of reduction gears operating under heavy loads and high temperatures.

### ADVANTAGES

- Excellent extreme-pressure and anti-wear properties.
- Excellent oxidation stability.
- Excellent rust and corrosion protection.
- Very high demulsibility with water.
- High viscosity index.

### PERFORMANCES

ISO 6743-6 and ISO 12925-1, category CKC, CKD  
DIN 51517 Part 3: 2004-01  
AIST 224  
AGMA 9005-E02  
David Brown S1.53.101(E)  
Strong FAG FE-8 performance

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 208 L 
Gear SY 68	66	10.6	150	-30	222	104320	100517
Gear SY 100	100	14.5	149	-24	240	108300	108301
Gear SY 150	150	19.7	151	-51	234	104322	108479
Gear SY 220	220	28.3	159	-36	224	104321	108480
Gear SY 320	324	38.2	168	-24	232	104294	108481
Gear SY 460	458	50.5	172	-42	226	104295	108515



## SYNTHETIC SUPRA GEAR GL

### APPLICATION



Long-life or permanent lubrication of worm gear reduction drives, or gearboxes operating in a wide temperature range. Lubrication of all types of machine exposed to high temperatures or heavy loads in an oil circulation system. Not miscible with mineral or other synthetic lubricants.

### ADVANTAGES

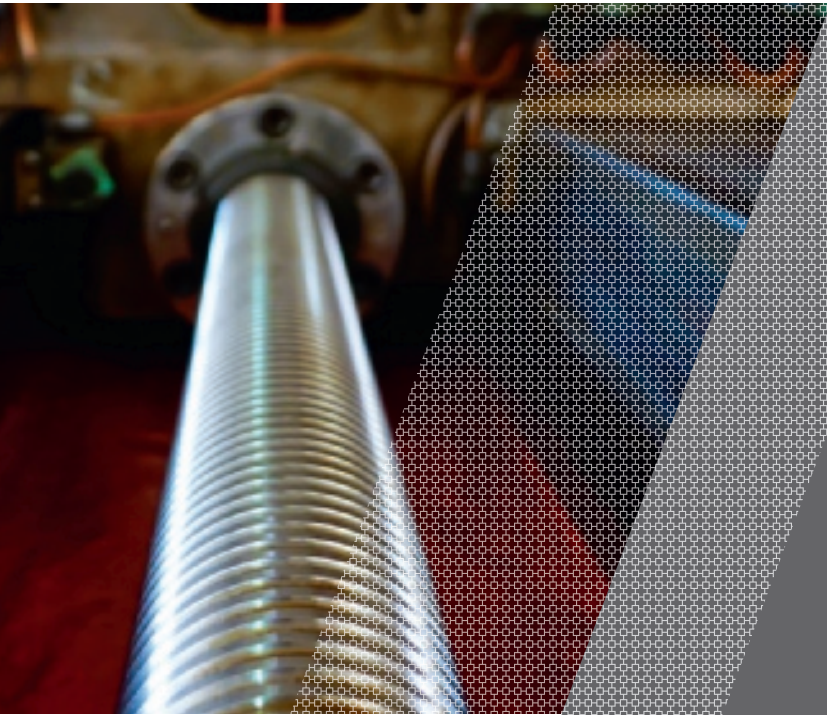
- Outstanding load carrying properties.
- Excellent thermal stability.
- Excellent corrosion protection (ASTM D665, procedure B pass).
- Outstanding demulsibility characteristics.
- Allows thermally stable operation at temperatures in excess of 200 °C.
- Free of chlorine, sulphur and metal-based additives including lead.

### PERFORMANCES

DIN 51517 Part 3, CLP  
David Brown Type G

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 
Supra Gear GL 150	150	25	195	-30	191	-	206 L - 106314
Supra Gear GL 220	237	32	177	-30	231	106315	205 L - 106316
Supra Gear GL 320	325	45	196	-30	225	106319	207 L - 106320





# SLIDEWAY OILS

Premium quality lubricants specially designed for the lubrication of high production machine tools. Our slideway lubricants guarantee high load carrying capacity, which significantly reduces the wear on the guides as well as excellent lubricity to prevent stick-slip phenomena. Due to the outstanding demulsifying ability and compatibility with our soluble cutting fluids they are the first choice for machine owners who prefer to get all lubricants from only one source.



## MINERAL SLID FILM

### APPLICATION

High performances lubricating oil for slideways, hydraulic and centralised lubrication systems.

### ADVANTAGES

- High demulsifiability with water soluble metalworking fluids.
- Corrosion resistant.
- Compatible with plastic coated ways (SKC).
- Low friction coefficient.
- Avoids Stick-Slip.
- Excellent adhesiveness.
- Anti-wear and extreme-pressure.
- Zinc-free.

### PERFORMANCES

#### SLIDEWAYS




ISO 11158 category HG; 6743-4 category HG; 6743-13 category G  
CINCINNATI MILACRON P-47 and P-50.

#### HYDRAULICS

ISO 11158 category HM;  
6743-4 category HM  
DIN 51524 part 2, HLP

#### GEARS

DIN 51517 part 3  
AGMA 9005 - E02  
US STEEL 224

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Slid Film 68	68	9.2	105	-24	244	104231	108758	108484
Slid Film 100	100	11.4	100	-18	256	104277	107190	-
Slid Film 150	150	14.6	96	-27	242	104279	107189	-
Slid Film 220	220	18.7	97	-18	240	104278	108759	108485



## MINERAL SUPRA SLIDE

**APPLICATION**




High performance oil for the lubrication of machine tool slideways.

**ADVANTAGES**

- Excellent compatibility with aqueous metalworking fluids.
- Exceptional demulsibility properties, particularly with MotulTech soluble fluids.
- Excellent lubricity and load carrying performance.
- Avoids Stick-Slip.
- Non-corrosive to ferrous and non-ferrous alloys.
- Anti-wear and extreme-pressure performance.

**PERFORMANCES**

Cincinnati Lamb P-47 / P-50  
SH/T0361-94 Chinese ntl. specification  
DIN 51524-2 HLP; DIN 51517-3 CLP

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supra Slide 68	70	8.9	100	-15	248	104513	104515	105863
Supra Slide 220	219	19	96	-12	286	104514	104517	-





# SPINDLE OILS

High quality oils specifically made for high-speed spindles bearings in all types of industrial machinery. These lubricants do not only prevent machine failures due to premature wear, but also cool and protect the spindle against corrosion.



## MINERAL SPEED A

### APPLICATION




Lubrication of high-speed spindles bearings, airline oilers, hydraulic systems requiring low-viscosity lubricants in grinders and other machine tools.

### ADVANTAGES

- Reduced sludge, varnish and deposit formation.
- Corrosion resistance.
- Excellent anti-wear protection.
- Enhanced thermal and oxidative stability.
- Zinc-free.

### PERFORMANCES

ISO TR 3498: L-FD and L-HM  
ISO 6743-2: L-FD

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Speed AA 2	2.1	1	148	-54	108	104419	-	-
Speed A 5	5.1	1.6	na	-46	140	108222	-	-
Speed A 10	10	2.7	112	-48	146	104420	108482	108483





# CHAIN OILS

A complete range for maximisation of service life of a chain drive or conveyor. MotulTech's high-performance chain and conveyor lubricants are suitable for many difficult operating conditions such as high temperature, stable, wet or corrosive environments. These products are based on synthetic base oils. They have extremely low volatility and will not form carbon deposits.






## SYNTHETIC SUPRA CHAIN HT

### APPLICATION

High temperature chain oil specifically adapted to the lubrication of chains and bearings of installations with a continuous temperature between 150 and 250 °C.

### ADVANTAGES

- Very good oxidation stability.
- Excellent adhesion and penetration properties.
- Very low evaporation rate and smoke formation.
- Good corrosion protection.
- Excellent lubricity and wear protection.
- High temperature resistance.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supra Chain 120 HT	101	12	105	-48	278	110288	110289	-
Supra Chain 250 HT	250	19	80	-33	280	110290	110291	110831





# COMPRESSOR OILS

A range of special lubricants to lubricate both the working parts and the pressurized spaces in a compressor. MotulTech offers high-performance products for almost any piston and screw compressors, from small single-stage units to multi-stage versions with very high output. Depending on the application, you can find products on a mineral or synthetic basis, from 3,000 to 10,000 hrs service life.



## MINERAL VIS

**APPLICATION**




Lubrication of screw air compressors as well as vacuum pumps.

**ADVANTAGES**

- Excellent anti-wear performances.
- Excellent corrosion protection.
- Excellent oxidation resistance and thermal stability at high temperatures.
- Low ash and carbon formation.
- Zinc-free.

**PERFORMANCES**

DIN 51506 – VBL, VCL, VDL  
ISO / DP 6521 (DAA, DAB, DAH, DAG)

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Vis 32	32	5.5	108	-15	226	104282	108467	-
Vis 46	45	7	110	-39	230	104267	108468	109785



## MINERAL ALTERNA

**APPLICATION**



Lubrication of reciprocating compressors as well as vacuum pumps.

**ADVANTAGES**

- Excellent anti-wear performances.
- Excellent corrosion protection.
- Excellent oxidation resistance and thermal stability at high temperatures.
- Low ash and carbon formation.
- Zinc-free.

**PERFORMANCES**

DIN 51506 – VBL, VCL, VDL  
ISO / DP 6521 (DAA, DAB, DAH, DAG)

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 208 L 
Alterna 68	68	9.1	109	-15	230	107799	107800
Alterna 100	101	11.7	105	-15	230	104251	108469
Alterna 150	150	15.4	103	-15	232	104283	-





## SYNTHETIC BAR SY

### APPLICATION



High performance synthetic lubricants for rotary and reciprocating compressors.

### ADVANTAGES

- Excellent wear and corrosion protection.
- Very long drain intervals for reduced compressor maintenance.
- Reduces varnish and lacquer deposits.
- High viscosity index.
- Very low volatility for lower oil consumption.
- High oxidation resistance.
- Excellent separation from air and water.

### PERFORMANCES

DIN 51506 – VCL, VDL

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 208 L 
Bar SY 46	46	7.5	128	-36	238	104688	104707
Bar SY 68	70	10	124	-33	250	104690	104761
Bar SY 100	101	12.5	117	-27	252	104691	104689



## SYNTHETIC SUPRABAR SY

### APPLICATION



High performance lubricant for modern reciprocating or rotary air compressors operating under extreme climatic conditions, harsh environments and other severe operating environments and requiring extended oil change intervals.

### ADVANTAGES

- Excellent anti-wear performance.
- High viscosity index, can be used in a large temperature range.
- Very severe operating conditions.
- Optimum efficiency.
- Excellent protection against corrosion, varnish and lacquer deposits.
- Increased draining intervals, up to 10,000 hrs for reduced maintenance costs.

### PERFORMANCES

DIN 51506 (VBL, VCL, VDL)  
ISO / DP 6521 (DAA, DAB, DAH, DAG)

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 208 L 
Suprabar SY 32	32	6.2	146	-42	260	110229	110230
Suprabar SY 46	46	7.7	148	-36	272	110175	110176
Suprabar SY 68	68	11.1	155	-42	280	110177	110231





# FOOD GRADE OILS

The MotulTech's Food Grade oils range is especially suitable for the food industry. Typical applications are mechanisms in machines for meat processing, production of dairy and bakery products, beverages, the processing of sugar and cereals, as well as the production of pharmaceutical products, animal feed and food packaging.






## HYDRAULIC MEDICINAL WHITE OIL HYDRAULIC FG

### APPLICATION

Lubrication of hydraulic systems, in the food and beverage, cosmetic and pharmaceutical industries. Made from elements that are part of the Food and Drug Administration. NSF H1 certified.

### ADVANTAGES

- Oxidation stability.
- Extreme-pressure and anti-wear performance.
- Excellent corrosion protection.
- Excellent anti-foam properties.
- Excellent water demulsibility.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 215 L 	IBC 1000 L 
Hydraulic FG 32	32	7	>140	-10	>190	-	-	106609
Hydraulic FG 46	46	9	>140	-10	>190	108463	108464	109097
Hydraulic FG 100	100	15	155	-10	>190	102018	-	-





## HYDRAULIC SYNTHETIC HYDRAULIC FG-F

### APPLICATION

Lubrication of plain bearings, conveyor chains, hydraulic circuits particularly at low temperatures. Lubricant of choice in cold industries. NSF H1 certified.

### ADVANTAGES

- Reinforced anti-wear and anti-corrosion performance.
- Excellent anti-foam properties.
- Excellent water demulsibility.
- High viscosity index.
- Low pour point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 215 L 
Hydraulic FG-F 32	32	6	130	-50	240	104449	104451



## HYDRAULIC SYNTHETIC HYDRAULIC FG-V

### APPLICATION

Lubrication of plain bearings, conveyor chains, hydraulic circuits particularly at low temperatures. Lubricant of choice in cold industries. NSF H1 certified.

### ADVANTAGES

- Reinforced anti-wear and anti-corrosion performance.
- Excellent anti-foam properties.
- Excellent water demulsibility.
- High viscosity index.
- Low pour point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L	DRUM 215 L
Hydraulic FG-V 46	46	8.5	130	-50	250		108505 





## GEAR SEMI-SYNTHETIC GEAR FG

### APPLICATION

Lubrication of plain bearings and loaded enclosed gears in the food and beverage industry. Made from elements that are part of the Food and Drug Administration list. NSF H1 certified.

### ADVANTAGES

- Oxidation stability.
- Extreme-pressure and anti-wear performance.
- Excellent corrosion protection.
- High viscosity index.
- Excellent anti-foam properties.
- Low pour point.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 215 L 
Gear FG 150	150	20	>140	-18	>220	102098	108507
Gear FG 220	220	24	>140	-22	>220	108502	108503
Gear FG 320	320	40	>140	-25	>220	102132	108504
Gear FG 460	460	55	>140	-25	>220	102520	108508
Gear FG 680	680	65	>140	-25	>220	106184	-





## COMPRESSOR SYNTHETIC COMPRESSOR FG

### APPLICATION

Lubrication of CO<sub>2</sub>, air and inert gas compressors in the food and beverage industry. Made from elements that are part of the Food and Drug Administration list. NSF H1 certified.

### ADVANTAGES

- Low volatility.
- High extreme-pressure and anti-wear performance.
- Excellent corrosion protection.
- Excellent demulsibility.
- Low residue tendency.
- Excellent anti-foam properties.
- Excellent deaeration properties.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 215 L 
Compressor FG 46	46	8.5	>130	<-30	>240	-	108506
Compressor FG 68	68	11.7	>130	<-30	>240	102131	-





CHAIN  
**SYNTHETIC**  
**CHAIN FG**

**APPLICATION**

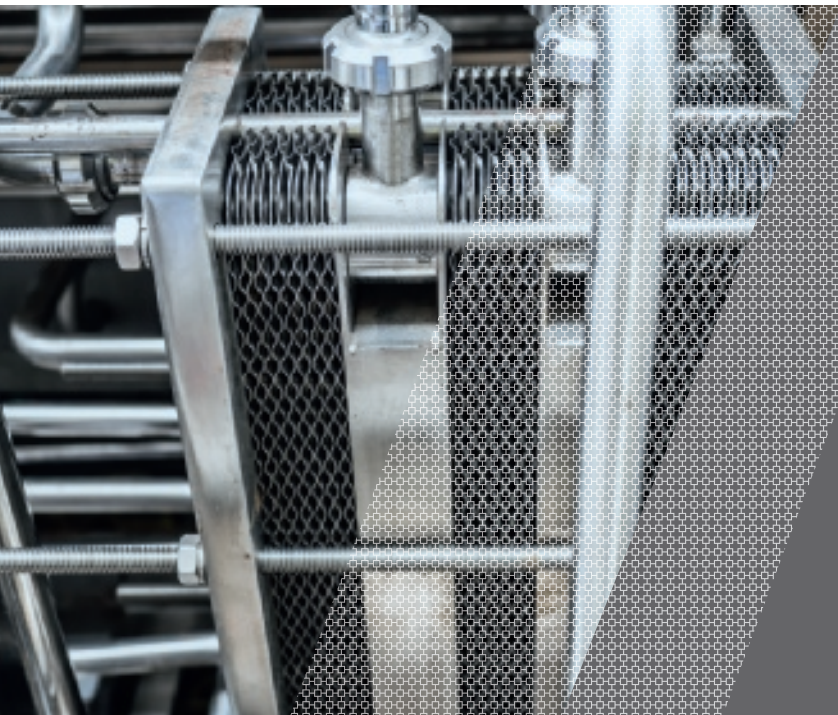
Lubrication of drive and transport chains in the food industry and equipment manufacturing food packaging industry.  
 Made from elements that are part of the Food and Drug Administration list.  
 NSF H1 certified.

**ADVANTAGES**

- High resistance to water.
- Excellent oxidation stability.
- High anti-wear performances.
- Excellent corrosion protection.
- Very good adherence.
- No coking deposits.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING	
						JERRYCAN 20 L 	DRUM 215 L 
Chain FG 320	320	34.1	150	-45	280	104486	104487





# HEAT TRANSFER OILS

A range of temperature and oxidation-resistant mineral and synthetic fluids, low viscous and chemically inert, with high thermal potential for cooling systems. These oils guarantee best corrosion protection and improved oxidation stability in enclosed heating circuits.






## MINERAL SUPRACAL

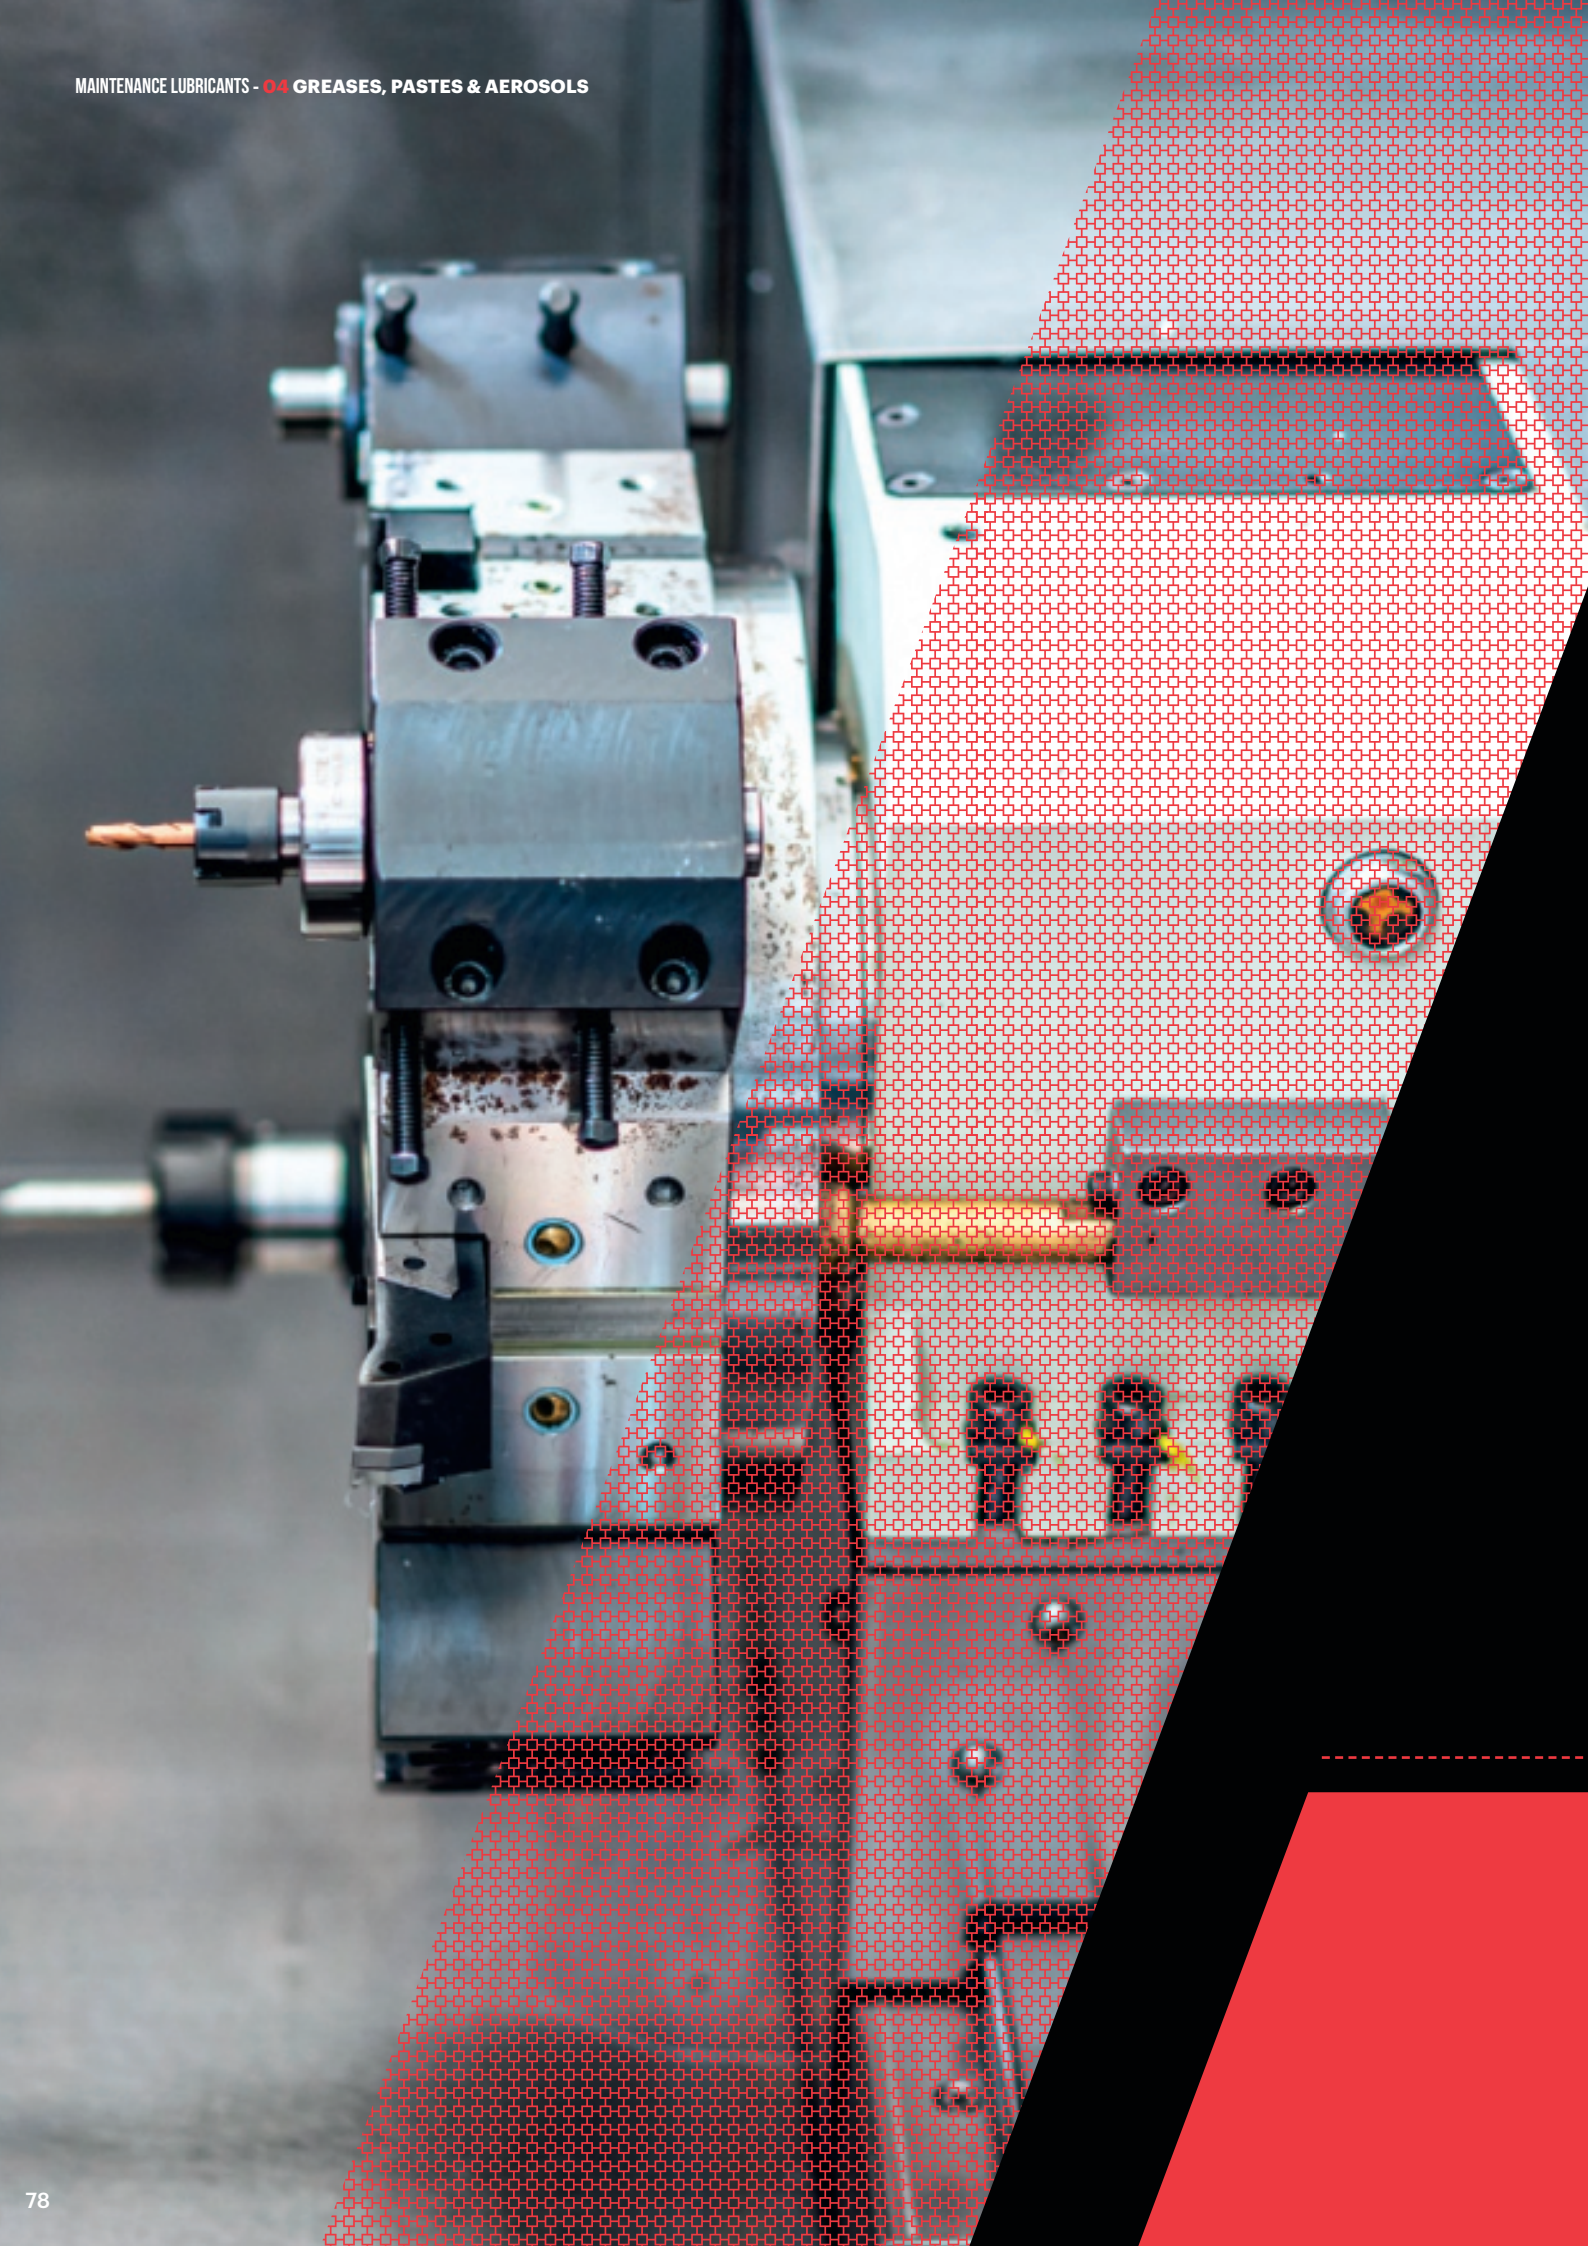
### APPLICATION

Highly refined mineral oil with paraffinic tendencies for heat transfer and thermal controls operating at temperatures up to 280°C. Can be used for dynamic circulation as well as static applications.

### ADVANTAGES

- Perfect stability at high temperatures.
- High resistance to oxidation.
- Excellent anti-rust, anti-corrosion and anti-foam properties.
- Low viscosity for excellent thermodynamic characteristics.
- Very low vapour pressure.
- Non-toxic, zinc-free.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	VISCOSITY AT 100°C (CST)	VI	POUR POINT °C	FLASH POINT °C	AVAILABLE PACKAGING		
						JERRYCAN 20 L 	DRUM 208 L 	IBC 1000 L 
Supracal 22	22	4.4	110	-36	212	104497	104504	-
Supracal 32	30.4	5.3	104	-21	222	104500	104503	104501
Supracal 105	101.5	11.3	97	-17	272	104496	109786	104502



## PART 2

## MAINTENANCE LUBRICANTS

## 04

GREASES, PASTES  
& AEROSOLS

PAGE 78-109 &gt;

GENERAL PURPOSE GREASES	80
HIGH & LOW TEMPERATURE GREASES	84
GEAR GREASES	88
MACHINE TOOL GREASES	90
MINING & HD GREASES	92
AGRICULTURE & FORESTRY GREASES	96
FOOD & BEVERAGE GREASES	100
SPECIALTY GREASES	104
AEROSOLS	108

*Capitalizing on its expertise to meet the constant demand for improved mechanical performance, Motul has developed an high performance range of greases which meets and exceeds the standards demanded by industry OEMs and our customers. This comprehensive range of greases can be used in numerous automotive, HD and industrial applications from general purpose to more specialized high & low temperature, or food grades. These greases will provide performance, reliability and protection to all equipment and vehicles, in all conditions, day after day.*



# GENERAL PURPOSE GREASES

Today's production facilities have a variety of grease-lubricated equipment, varying significantly in speed and load, and operating in wet or dusty environments. To maximize grease lubrication effectiveness, minimize cost and minimize risk of application-induced failure, Motul offers greases that cover a variety of applications. These greases range from slow to high speeds and from low to high loads. Single products to meet a multitude of requirements.



CALCIUM / CALCIUM EP GREASES  
**MINERAL**  
**IRIX C 120-2**  
 (formerly GRAISSE 113)

**APPLICATION**

Multi-purpose grease for machines working under mild loads and temperatures. Suitable for bearings and plain bearings, slideways, sliding blocks, lubrication of various machine movements. Also intended for the temporary protection of metal parts and the protection of spray booths.

**ADVANTAGES**

- Insoluble in cold or tempered water.
- Very easy to inject.
- Good anti-corrosion performances.
- Remains stable at work and when temperature changes.
- Very adhesive to metal surfaces.

**CLASSIFICATION**

ISO 12924: L-XCCIB2  
 DIN 51502: KP2G-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING			
								24 x 0.4 KG CART.	PAIL 19 KG	DRUM 50 KG	DRUM 180 KG
Irix C 120-2	120	Calcium	2	-30 to 110 (max 120°C)	> 140	280	Amber	108243	108244	108245	106780



CALCIUM / CALCIUM EP GREASES  
**MINERAL**  
**IRIX C 310-2**

**APPLICATION**

Calcium thickened multi-purpose extreme-pressure grease based on mineral oil. Recommended for lubrication of bearings, bushings and plain bearings at low to medium speed, medium temperatures and high loads in wet environments. Mainly for agricultural machinery, heavy-duty and automotive applications. This grease is compatible with multi-purpose greases based on lithium and lithium/calcium.

**ADVANTAGES**

- Good protection against corrosion.
- Good adhesiveness.
- Good resistance to shock loads.
- Good water resistance.

**CLASSIFICATION**

ISO 12924: L-XCCHB2  
 DIN 51502: KP2G-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix C 310-2	310	Calcium	2	-30 to 120 (max 130°C)	> 140	320	Green	110411	110412	110413





CALCIUM / CALCIUM EP GREASES

**MINERAL**  
**IRIX C 1370-0**

(formerly IRIX CSM 1370)

APPLICATION




Semi-fluid grease with corrosion inhibitors and extreme-pressure/anti-wear additives. Suitable for the lubrication of heavily loaded bearings in wet and corrosive environments. Ideal for chassis or marine applications and as an universal grease for forestry, agricultural and construction vehicles. Easily pumpable even at low temperature in most high pressure centralized lubrication systems even with a high base oil viscosity.

ADVANTAGES

- Excellent adhesion.
- Excellent water resistance.
- Very good (shock) load carrying capacity.
- Good corrosion protection, perfectly suited for wet and corrosive environments.
- Excellent at low temperature for extra good winter performance.

CLASSIFICATION

ISO 12924: L-XD(F)CHBO  
DIN 51502: KPOK-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								PAIL 19 KG	DRUM 50 KG	DRUM 180 KG
Irix C 1370-0	1370	Calcium	0	-40 to 120 (max 130 °C)	>120	300	Yellow	 108246	 109096	 108247



LITHIUM EP GREASES

**MINERAL**  
**IRIX L 50-00**

(formerly IRIX LSM 1500)

APPLICATION




Multi-purpose, extreme-pressure grease formulated from premium mineral base oils and a lithium thickener. Can be used to lubricate bearings, gears and all mechanical units operating under medium loads, especially enclosed gears and bearings in poorly sealed gearcases. Also perfectly suitable for low pressure centralized systems.

ADVANTAGES

- Excellent protection against corrosion.
- Excellent extreme-pressure performance.
- Excellent wear protection.
- Very good adhesion.
- Very good stability in service and storage.
- Insoluble in water.

CLASSIFICATION

ISO 12924: L-XCCIB00  
DIN 51502: KP00K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								4 X 5 KG	PAIL 19 KG	DRUM 50 KG
Irix L 50-00	60	Lithium	00	-30 to 120	>160	250	Amber	 106788	 106874	 106875



LITHIUM EP GREASES

**MINERAL**  
**IRIX L 80-0**

(formerly IRIX LSM 150)

APPLICATION




Multi-purpose, extreme-pressure grease formulated from premium mineral base oils and a lithium thickener. Can be used to lubricate bearings, gears and all mechanical units operating under medium loads. NLGI grade 0: reducers, centralized greasing, gears in crankcases, various parts working in a cold atmosphere, all soft extreme-pressure grease applications.

ADVANTAGES

- Excellent protection against corrosion.
- Excellent extreme-pressure performance.
- Excellent wear protection.
- Very good adhesion.
- Very good stability in service and storage.
- Insoluble in water.

CLASSIFICATION

ISO 12924: L-XCCIB0  
DIN 51502: KP0K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								4 X 5 KG	PAIL 19 KG	DRUM 50 KG
Irix L 80-0	65	Lithium	0	-30 to 120	>160	250	Amber	 106785	 106871	 106872



LITHIUM EP GREASES  
**MINERAL**  
**IRIX L 130-1**  
 (formerly IRIX LSM 151)

APPLICATION

Multi-purpose, extreme-pressure grease formulated from premium mineral base oils and a lithium thickener. Can be used to lubricate bearings, gears and all mechanical units operating under high loads. NLGI grade 1: centralized greasing with high pressure.

ADVANTAGES

- Excellent protection against corrosion.
- Excellent extreme-pressure performance.
- Excellent wear protection.
- Very good adhesion.
- Very good stability in service and storage.
- Insoluble in water.

CLASSIFICATION

ISO 12924: L-XBCIB1  
 DIN 51502: KP1K-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING				
								24 x 0.4 KG CART.	12 x 1 KG	4 x 5 KG	DRUM 50 KG	DRUM 180 KG
Irix L 130-1	130	Lithium	1	-20 to 130	>180	250	Amber	106789	110424	106781	106876	106784



LITHIUM EP GREASES  
**MINERAL**  
**IRIX L 130-2**  
 (formerly IRIX LSM 152)

APPLICATION

Multi-purpose, extreme-pressure grease formulated from premium mineral base oils and a lithium thickener. Can be used to lubricate bearings, gears and all mechanical units operating under medium loads. NLGI grade 2: suitable for a wide range of general-purpose lubrication applications ranging from bearings to cables, chains and other linkages. Also suitable as a multi-purpose chassis, pin and bushing grease.

ADVANTAGES

- Excellent protection against corrosion.
- Excellent extreme-pressure performance.
- Excellent wear protection.
- Very good adhesion.
- Very good stability in service and storage.
- Insoluble in water.

CLASSIFICATION

ISO 12924: L-XBCHB2  
 DIN 51502: KP2K-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING					
								24 x 0.4 KG CART.	12 x 1 KG	4 x 5 KG	PAIL 19 KG	DRUM 50 KG	DRUM 180 KG
Irix L 130-2	130	Lithium	2	-20 to 120	>180	315	Amber	104717	110425	106840	106878	106879	106882



LITHIUM EP GREASES  
**MINERAL**  
**IRIX L 130-3**  
 (formerly IRIX LSM 153)

APPLICATION

Multi-purpose, extreme-pressure grease formulated from premium mineral base oils and a lithium thickener. Can be used to lubricate bearings with vertical shaft, gears and all mechanical units operating under high loads. NLGI grade 3: truck hubs, very loaded sleeves.

ADVANTAGES

- Excellent protection against corrosion.
- Excellent extreme-pressure performance.
- Excellent wear protection.
- Very good adhesion.
- Very good stability in service and storage.
- Insoluble in water.

CLASSIFICATION

ISO 12924: L-XBCIB3  
 DIN 51502: KP3K-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	12 x 1 KG	DRUM 50 KG
Irix L 130-3	130	Lithium	3	-20 to 130	>190	285	Amber	106783	110426	106842



LITHIUM EP GREASES

**MINERAL**  
**IRIX L 150-2 MO**

(formerly IRIX LSM 112 MO, MOLY GREASE)

APPLICATION

Lithium thickened lubricating grease based on mineral oil, antioxidants, corrosion inhibitors, extreme-pressure / anti-wear additives and MoS<sub>2</sub>. Suitable for general industrial applications such as lubrication of gears, rolling contact bearings, plain bearings, splined shafts, etc. under heavy conditions (load, shock, presence of water).

ADVANTAGES

- Good mechanical stability.
- High load carrying capacity.
- Good corrosion protection.

CLASSIFICATION

ISO 12924: L-XBCHB2  
DIN 51502: KPF2K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING					
								24 x 0.4 KG CART.	24 x 0.4 KG LS CART.	12 x 1 KG	4 x 5 KG	DRUM 50 KG	DRUM 180 KG
Irix L 150-2 MO	150	Lithium	2	-30 to 120 (max 130°C)	> 185	> 325	Black	106893	108656	110474	106895	108659	108660





# HIGH & LOW TEMPERATURE GREASES

Suitable greases with good sealing properties are essential, especially when it comes to the lubrication of components, that are exposed to high or low temperatures and extreme environmental conditions such as humidity, pollution. The selection of this specific grease must include consideration of oil type and viscosity, oil viscosity index, thickener type...



## LITHIUM COMPLEX GREASES

### MINERAL

## **IRIX EVO LX 200-2**

(formerly IRIX HP-LXM 202)

#### APPLICATION






Heavy-duty grease specifically developed for the long-term lubrication of all mechanisms subjected to very harsh working conditions. Perfectly suited for the lubrication of plain and anti-friction bearings, small reduction gears, joints and other mechanisms subjected to high temperatures and loads including car and truck wheel bearings.

#### ADVANTAGES

- Excellent wear resistant and extreme-pressure properties.
- Very good resistance to water.
- Excellent adhesiveness.
- Resistance to corrosion.

#### CLASSIFICATION

ISO 12924: L-XBDHB2  
DIN 51502: KPX2N-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING									
								24 x 0.4 KG CART.	12 x 1 KG	PAIL 19 KG	DRUM 50 KG	DRUM 180 KG					
Irix EVO LX 200-2	220	Lithium Complex	2	-20 to 150 (max 160°C)	>240	400	Green						106790	110427	106869	106870	110435



## LITHIUM COMPLEX GREASES

### SYNTHETIC

## **IRIX INO LX 40-2**

(formerly IRIX HP-PLC 42)

#### APPLICATION



Universal grease for wide range of temperature applications particularly at high speed and low temperature and where a lubricant with low frictional resistance even at low temperatures is required.

#### ADVANTAGES

- Excellent high and low temperature performance.
- Very good mechanical stability.
- Good corrosion protection.
- Suitable for high speed applications.
- Very high load carrying capacity and excellent wear protection.

#### CLASSIFICATION

ISO 12924: L-XEDIB2  
DIN 51502: KPHC2N-55

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING			
								24 x 0.4 KG CART.	DRUM 50 KG		
Irix INO LX 40-2	44	Lithium Complex	2	-55 to 140 (max 180°C)	>260	>380	Beige			108102	110436



LITHIUM COMPLEX GREASES

**SYNTHETIC**

**IRIX INO LX 100-2**

APPLICATION




Universal grease recommended for higher speed applications such as electric motors, where reduced friction, low wear and long service life are required.

ADVANTAGES

- Excellent high and low temperature performance.
- Very good mechanical stability.
- Good corrosion protection.
- Suitable for high speed applications.
- Very high load carrying capacity and excellent wear protection.

CLASSIFICATION

ISO 12924: L-XD(F)DIB2  
DIN 51502: KPHC2N-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix INO LX 100-2	100	Lithium Complex	2	-40 to 150 (max 220°C)	>260	>360	Beige	 110503	 110504	 110505



LITHIUM COMPLEX GREASES

**SYNTHETIC**

**IRIX INO LX 220-2**

APPLICATION




Suitable for both industrial and automotive applications. The product's all-round properties and wide temperature range make it the primary choice for various types of bearing applications including in high and low temperature conditions.

ADVANTAGES

- Excellent high and low temperature performance.
- Very good mechanical stability.
- Good corrosion protection.
- Suitable for high speed applications.
- Very high load carrying capacity and excellent wear protection.

CLASSIFICATION

ISO 12924: L-XD(F)DIB2  
DIN 51502: KPHC2N-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix INO LX 220-2	220	Lithium Complex	2	-40 to 150 (max 220°C)	>260	>360	Beige	 110398	 110399	 110400



LITHIUM COMPLEX GREASES

**SYNTHETIC**

**IRIX INO LX 460-2**

APPLICATION




Suitable for heavily loaded bearings in low to medium speed applications, applications at elevated temperatures, and wet and corrosive environments. The grease is perfectly adapted to carry high loads and to resist vibrations and shock loads.

ADVANTAGES

- Excellent high and low temperature performance.
- Very good mechanical stability.
- Good corrosion protection.
- Suitable for high speed applications.
- Very high load carrying capacity and excellent wear protection.

CLASSIFICATION

ISO 12924: L-XD(F)DIB2  
DIN 51502: KPHC2N-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix INO LX 460-2	460	Lithium Complex	2	-40 to 150 (max 220°C)	>260	>360	Beige	 110408	 110409	 110410



CALCIUM SULFONATE COMPLEX GREASES  
**MINERAL**  
**IRIX EVO CSX 290-2**  
 (formerly IRIX HP-CXSM 290)

APPLICATION

Suitable for both industrial, marine and off-road applications. The extreme load carrying capacity and excellent water resistance make the product a perfect choice for heavily loaded applications in hot, or wet and corrosive environments.

ADVANTAGES

- Very good corrosion protection.
- Superb mechanical stability.
- Very good water resistance.
- Excellent load carrying capacity.

CLASSIFICATION

ISO 12924: L-XC(F)DIB2  
 DIN 51502: KP2N-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix EVO CSX 290-2	290	Calcium Sulfonate Complex	2	-30 to 140 (max 180°C)	>280	750	Brown			
								107191	110238	110226



CALCIUM SULFONATE COMPLEX GREASES  
**MINERAL**  
**IRIX EVO CSX 440-2**

APPLICATION

Suitable for both industrial, marine and off-road applications. The extreme load carrying capacity and excellent water resistance make the product a perfect choice for heavily loaded applications in hot, or wet and corrosive environments.

ADVANTAGES

- Very good corrosion protection.
- Superb mechanical stability.
- Very good water resistance.
- Excellent load carrying capacity.

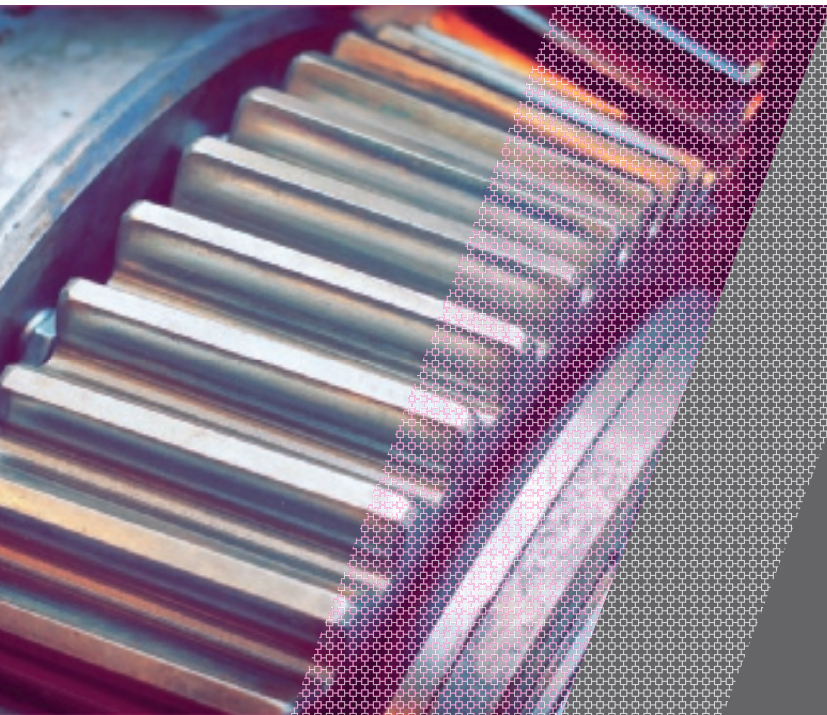
CLASSIFICATION

ISO 12924: L-XC(F)DIB2  
 DIN 51502: KP2N-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix EVO CSX 440-2	440	Calcium Sulfonate Complex	2	-20 to 140 (max 180°C)	>280	650	Brown			
								110389	110390	110391







# GEAR GREASES

Oils are commonly used for closed gears, but greases with low base oil viscosity can be used for high speed or open gears. The grease characteristics will then be chosen according to speed and load: with decreasing speed or increasing load, grease with correspondingly higher base oil viscosity will be used.



## LITHIUM-CALCIUM COMPLEX GREASES

### MINERAL

## IRIX EVO LCX 920-000

(formerly IRIX HP - LCM 92000)

#### APPLICATION


Suitable for industrial and automotive applications with high loads and slow speeds. Particularly developed for high pressure centralized lubrication systems, lubrication of low speed rollers in linear machine tool guides and closed gears. Prime choice for wet, dirty and highly loaded environments with low speeds.

#### ADVANTAGES

- Excellent load carrying capacity.
- Offers lower friction coefficient.
- Very good water resistance.
- Superior corrosion protection and antioxidant properties.

#### CLASSIFICATION

ISO 12924: L-XB(F)CCB000  
DIN 51502: GP000K-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								PAIL 19 KG 
Irix EVO LCX 920-000	920	Lithium-Calcium Complex	000	-20 to 120 (max 130°C)	>180	700	Brown	107888



## LITHIUM-CALCIUM COMPLEX GREASES

### MINERAL

## IRIX EVO LCX 500-0 G

(formerly IRIX HP-LCXM 500 G)

#### APPLICATION



High performance open gear grease with graphite designed to lubricate open mesh gears operating under heavy loads to avoid pitting and seizing. Especially suited for girth gears in the chemical, cement, mineral, fertilizer and metalworking industry or any mechanism requiring a lubricant capable of resisting severe operating conditions. Suitable spraying equipment for open gear.

#### ADVANTAGES

- Excellent water resistance.
- Good load carrying capacity.
- Excellent resistance to shock loads.
- Good corrosion protection, perfectly suited for wet and corrosive environments.

#### CLASSIFICATION

ISO 12924: L-XB(F)DIB0  
DIN 51502: OGPFOK-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING	
								4 x 5 KG 	DRUM 50 KG 
Irix EVO LCX 500-0 G	500	Lithium-Calcium Complex	0	-20 to 120 (max 130°C)	>240	700	Black	108108	110449





LITHIUM GREASES  
**MINERAL**  
**SOFT GREASE 0**

**APPLICATION**



Multi-purpose, extreme-pressure grease suitable for filling gearbox casings, spur gears and bevel gear drives, worm gear pairs and similar industrial gears. This grease is also suited for central lubricating installations of utility vehicles as well as for outside working units having long tubing.  
 SOFT GREASE 0 meets the requirements of the flow grease specifications of Groeneveld and MAN 283 Li-P0.

**ADVANTAGES**

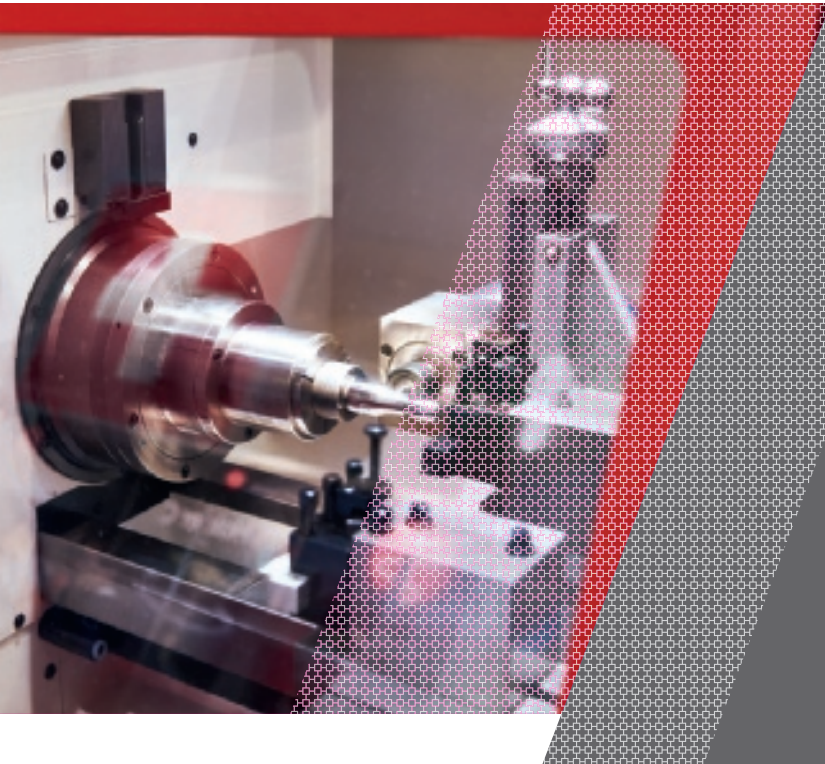
- Extraordinary oxidation stability.
- Water resistant.
- Corrosion resistant.
- High pressure load capacity.
- Good adhesiveness.

**CLASSIFICATION**

ISO 6743-9: ISO-L-XCDEB 0  
 DIN 51502: GP0K-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING	
								PAIL 19 KG	DRUM 50 KG
Soft Grease 0	90	Lithium	0	-40 to 120	180	260	Dark brown	 110432	 100922





# MACHINE TOOL GREASES

Machine tools increasingly run three shifts a day. So, a perfect lubrication of machine components is key to ensure reliability and durable performance whilst reducing wear and maintenance costs. Motul offers a range of lubricating greases dedicated to machine tools and formulated to offer the best performance and compatibility with process lubricants in use.



## LITHIUM-CALCIUM COMPLEX GREASES MINERAL **IRIX EVO LCX 920-000** (formerly IRIX HP - LCM 92000)

### APPLICATION


Suitable for industrial and automotive applications with high loads and slow speeds. Particularly developed for high pressure centralized lubrication systems, lubrication of low speed rollers in linear machine tool guides and closed gears. Prime choice for wet, dirty and highly loaded environments with low speeds.


### ADVANTAGES

- Excellent load carrying capacity.
- Offers lower friction coefficient.
- Very good water resistance.
- Superior corrosion protection and antioxidant properties.

### CLASSIFICATION

ISO 12924: L-XB(F)CCB000  
DIN 51502: GP000K-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								PAIL 19 KG 
Irix EVO LCX 920-000	920	Lithium-Calcium Complex	000	-20 to 120 (max 130°C)	>180	700	Brown	107888



## LITHIUM COMPLEX GREASES SYNTHETIC **IRIX INO LX 40-2** (formerly IRIX HP-PLC 42)

### APPLICATION



Universal grease for wide range of temperature applications particularly at high speed and low temperature and where a lubricant with low frictional resistance even at low temperatures is required.

### ADVANTAGES

- Excellent high and low temperature performance.
- Very good mechanical stability.
- Good corrosion protection.
- Suitable for high speed applications.
- Very high load carrying capacity and excellent wear protection.

### CLASSIFICATION

ISO 12924: L-XEDIB2  
DIN 51502: KPHC2N-55

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING	
								24 x 0.4 KG CART. 	DRUM 50 KG 
Irix INO LX 40-2	44	Lithium Complex	2	-55 to 140 (max 180°C)	>260	>380	Beige	108102	110436



LITHIUM COMPLEX GREASES  
**MINERAL**  
**IRIX EVO LC 150-2**

**APPLICATION**

Suitable for application in wet conditions, extends the relubrication intervals and performance due to its high degree of mechanical stability even when mixed with water. Recommended for lubrication of roller and plain bearings, manual lubrication of linear guide at low to medium speed in wet environments (machine tools, paper machines, etc.).

**ADVANTAGES**

- Good corrosion protection.
- Excellent adhesion.
- Good resistance to shock loads.
- Very good water resistance.

**CLASSIFICATION**

ISO 12924: L-XCCEB2  
 DIN 51502: KP2K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix EVO LC 150-2	150	Lithium-Calcium	2	-30 to 120 (max 130°C)	>180	315	Green	110420	110401	110402



LITHIUM COMPLEX GREASES  
**MINERAL**  
**IRIX EVO LC 1200-2**  
 (formerly IRIX HP-LCM 1202 CC)

**APPLICATION**

Suitable for heavily loaded industrial and heavy-duty applications including extreme outdoor wet and dirty conditions. Perfect choice for the lubrication of slow moving and heavily loaded bearings and tool or workpiece clamping systems in machine tools. This lubricating grease provides excellent adhesion and water resistance for perfect protection of chucks, collets and vices.

**ADVANTAGES**

- Excellent load carrying capacity.
- Very good water resistance.
- Excellent adhesion.
- Very good resistance to shock loads.
- Good corrosion protection.

**CLASSIFICATION**

ISO 12924: L-XB(F)CHB2  
 DIN 51502: KPF2K-10

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								24 x 0.4 KG CART.
Irix EVO LC 1200-2	1200	Lithium-Calcium	2	-10 to 120 (max 130°C)	>180	>500	White	109613





# MINING & HD GREASES

Cars and on-road vehicles are not necessarily exposed to extreme conditions but they still require protection and performance in order to offer a long lasting and worry-free use. Thus the greases in use have to bring lubrication for the moving parts as well as protection against the effects of water and dust for the lifetime of the vehicle.



## LITHIUM GREASES MINERAL **CG GREASE 000**

### APPLICATION



Multi-purpose, extreme-pressure grease suitable for central lubrication systems of commercial vehicles, suits also for outdoor aggregates with long pipes.

### ADVANTAGES

- Good properties under heavy loads.
- Very good cold flow properties for better grease circulation in the pipes at cold temperature.
- Water resistant.
- Anti-corrosion, anti-rust and anti-oxidation.
- Excellent anti-wear properties.

### CLASSIFICATION

ISO 12924: L-XCCIB00  
DIN 51502: KP00K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING	
								PAIL 19 KG	DRUM 180 KG
CG Grease 000	45	Lithium	00/000	-50 to 120	> 160	200	Red	 108652	 110268



## LITHIUM GREASES MINERAL **SOFT GREASE 0**

### APPLICATION

Multi-purpose, extreme-pressure grease suitable for filling gearbox casings, spur gears and bevel gear drives, worm gear pairs and similar industrial gears. This grease is also suited for central lubricating installations of utility vehicles as well as for outside working units having long tubing.



SOFT GREASE 0 meets the requirements of the flow grease specifications of Groeneveld and MAN 283 Li-P0.

### ADVANTAGES

- Extraordinary oxidation stability.
- Water resistant.
- Corrosion resistant.
- High pressure load capacity.
- Good adhesiveness.

### CLASSIFICATION

ISO 6743-9: ISO-L-XCDEB 0  
DIN 51502: GP0K-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING	
								PAIL 19 KG	DRUM 50 KG
Soft Grease 0	90	Lithium	0	-40 to 120	180	260	Dark brown	 110432	 100922



LITHIUM GREASES  
**MINERAL GREASE 100**

APPLICATION

General-purpose grease for the lubrication applications ranging from bearings to cables, chains and other linkages as well as chassis, pins and bushings. Suitable to lubricate bearings, gears and all mechanical units operating under medium loads.

ADVANTAGES

- Good mechanical stability.
- Adequate pumpability at cold temperature.
- Anti-corrosion and anti-rust protection.
- Good adherence.

CLASSIFICATION

DIN 51502: KP2K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING			
								24 x 0.4 KG CART.	24 x 0.4 KG LS CART.	DRUM 50 KG	DRUM 180 KG
Grease 100	110	Lithium	2	-30 to 120	180	240	Blue				
								108653	108654	100916	100917



LITHIUM EP GREASES  
**MINERAL IRIX L 150-2 MO**  
*(formerly IRIX LSM 112 MO, MOLY GREASE)*

APPLICATION

Lithium thickened lubricating grease based on mineral oil, antioxidants, corrosion inhibitors, extreme-pressure / anti-wear additives and MoS<sub>2</sub>. Suitable for general industrial applications such as lubrication of gears, rolling contact bearings, plain bearings, splined shafts, etc. under heavy conditions (load, shock, presence of water).

ADVANTAGES

- Good mechanical stability.
- High load carrying capacity.
- Good corrosion protection.

CLASSIFICATION

ISO 12924: L-XBCHB2  
DIN 51502: KPF2K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING					
								24 x 0.4 KG CART.	24 x 0.4 KG LS CART.	12 x 1 KG	4 x 5 KG	DRUM 50 KG	DRUM 180 KG
Irix L 150-2 MO	150	Lithium	2	-30 to 120 (max 130°C)	>185	>325	Black						
								106893	108656	110474	106895	108659	108660



LITHIUM COMPLEX GREASES  
**MINERAL IRIX EVO LX 200-2**  
*(formerly IRIX HP-LXM 202)*

APPLICATION

Especially developed for the long-term lubrication of all mechanisms subjected to very harsh working conditions. Perfectly adapted grease for plain bearings, anti-friction bearings, small reduction gears, joints and other mechanisms subjected to high temperatures and loads as well as car and truck wheel bearings.

ADVANTAGES

- Excellent wear resistant and extreme-pressure properties.
- Very good resistance to water.
- Excellent adhesiveness.
- Resistance to corrosion.

CLASSIFICATION

ISO 12924: L-XBDHB2  
DIN 51502: KPX2N-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING				
								24 x 0.4 KG CART.	12 x 1 KG	PAIL 19 KG	DRUM 50 KG	DRUM 180 KG
Irix EVO LX 200-2	200	Lithium Complex	2	-20 to 150 (max 160°C)	>240	400	Green					
								106790	110427	106869	106870	110435



CALCIUM / CALCIUM EP GREASES

**MINERAL**  
**IRIX C 1370-0**

(formerly IRIX CSM 1370)

APPLICATION




Semi-fluid grease with corrosion inhibitors and extreme-pressure/anti-wear additives. Suitable for the lubrication of heavily loaded bearings in wet and corrosive environments. Ideal for chassis or marine applications and as an universal grease for forestry, agricultural and construction vehicles. Easily pumpable even at low temperature in most high pressure centralized lubrication systems even with a high base oil viscosity.

ADVANTAGES

- Excellent adhesion.
- Excellent water resistance.
- Very good (shock) load carrying capacity.
- Good corrosion protection, perfectly suited for wet and corrosive environments.
- Excellent at low temperature for extra good winter performance.

CLASSIFICATION

ISO 12924: L-XD(F)CHBO  
DIN 51502: KPOK-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								PAIL 19 KG	DRUM 50 KG	DRUM 180 KG
Irix C 1370-0	1370	Calcium	0	-40 to 120 (max 130 °C)	>120	300	Yellow	 108246	 109096	 108247



LITHIUM GREASES

**MINERAL**  
**IRIX FIFTH WHEEL GREASE**

(formerly FIFTH WHEEL GREASE)

APPLICATION


Grease especially formulated for the lubrication of semi-trailer fifth wheel plates. Can be also used for the greasing of cables, open and ring gears, gear-racks and ball joints for civil engineering machinery.

ADVANTAGES

- High adhesiveness.
- Anti-corrosion protection.
- High temperature stability.
- High pressure load capacity.
- Reinforced with graphite.

CLASSIFICATION

DIN 51502 : KPF2N-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								PAIL 19 KG
Irix Fifth Wheel Grease	800	Lithium	2	-30 to 140	190	320	Black	 108655







# AGRICULTURE & FORESTRY GREASES

As agriculture & forestry activities are highly seasonal and weather dependent, the reliability of vehicles and equipment is a must for users. Using a suitable lubricating grease is therefore a key factor for a carefree harvest, ground preparation or forestry. Furthermore, lubricants have to be compatible with an outdoor use where spillage must not create any enduring contamination of natural environment.



## CALCIUM / CALCIUM EP GREASES

### MINERAL **IRIX C 310-2**

#### APPLICATION

Calcium thickened multi-purpose extreme-pressure grease based on mineral oil. Recommended for lubrication of bearings, bushings and plain bearings at low to medium speed, medium temperatures and high loads in wet environments. Mainly for agricultural machinery, heavy-duty and automotive applications. This grease is compatible with multi-purpose greases based on lithium and lithium/calcium.

#### ADVANTAGES

- Good protection against corrosion.
- Good adhesiveness.
- Good resistance to shock loads.
- Good water resistance.

#### CLASSIFICATION

ISO 12924: L-XCCHB2  
DIN 51502: KP2G-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix C 310-2	310	Calcium	2	-30 to 120 (max 130 °C)	>140	320	Green			
								110411	110412	110413



## LITHIUM GREASES

### SEMI-SYNTHETIC **HD-AGRI GREASE**

#### APPLICATION

Multi-purpose grease especially formulated for applications requiring a good resistance to heavy loads and water. Greasing of roller and plain bearings, articulations, cables of tractors, harvesters, wine machinery and all types of civil engineering machinery.

#### ADVANTAGES

- Excellent results in presence of water.
- Good adherence on surfaces.
- Very good anti-wear & anti-corrosion protection.
- Good performance in time.
- Excellent results for heavy loads.

#### CLASSIFICATION

DIN 51502: KP2N-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING			
								24 x 0.4 KG CART.	24 x 0.4 KG LS CART.	DRUM 50 KG	DRUM 180 KG
HD-Agri Grease	800	Lithium	2	-30 to 140	190	280	Light green				
								108676	108678	108690	108691





CALCIUM / CALCIUM EP GREASES  
**ESTER**  
**IRIX BIO BE 30-000**

**APPLICATION**


Suitable for automatic centralized outdoor lubricating installations in the industrial and HD sector, particularly for outdoor utility vehicles. Also appropriate for the onboard lubrication of wheel flanges for underground or aboveground rail vehicles and for the temporary protection of metal parts.

**ADVANTAGES**

- Environmentally acceptable.
- Water resistant.
- Excellent corrosion protection.
- Low temperature stable.

**CLASSIFICATION**

DIN 51502: KPE000K-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING	
								PAIL 18 KG	
Irix BIO BE 30-000	32	Bentonite	000	-40 to 120	none	none	Amber	110422	



CALCIUM / CALCIUM EP GREASES  
**ESTER**  
**IRIX BIO C 110-2**

**APPLICATION**




Multifunctional biodegradable grease for machines working under mild conditions of load and temperature. Suitable for bearings and plain bearings, slideways, sliding locks, lubrication of various machines movements. Also intended for the temporary protection of metal parts. This lubricating grease offers a good mechanical stability, a good resistance to shock loads and is easily pumpable in most modern centralized lubrication systems.

**ADVANTAGES**

- Biodegradable.
- Excellent water resistance.
- Good resistance to shock loads.
- Good mechanical stability.

**CLASSIFICATION**

 ISO 12924: L-XCBHB2  
 DIN 51502: KPE2E-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix BIO C 110-2	110	Calcium	2	-30 to 80 (max 100°C)	>140	280	Amber	 110414	 110415	 110416



CALCIUM / CALCIUM EP GREASES  
**ESTER**  
**IRIX BIO C 210-2 FG**

**APPLICATION**




This grease is ideal not only for applications in the food producing sector, but also in marine, forestry, agriculture and construction machinery. It is easily pumpable in most modern high pressure centralized lubrication systems.

**ADVANTAGES**

- Readily biodegradable.
- Excellent water resistance.
- Excellent adhesion.
- Meets NSF H1 requirements.

**CLASSIFICATION**

 ISO 12924: L-XD(F)BIB2  
 DIN 51502: KPE2G-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix BIO C 210-2 FG	210	Calcium	2	-40 to 120	>140	300	White	 110417	 110418	 110419



MICROGEL GREASES  
**BIODEGRADABLE OIL**  
**IRIX HP - SI 180**

APPLICATION


Year-round grease for railway points and wheel flanges. Suitable for all kind of trackside lubrication spray systems. This product features excellent sprayability even at very low temperatures and extreme climatic conditions.

ADVANTAGES

- Biodegradable.
- Resistance to water.
- Excellent adhesion.

CLASSIFICATION

DIN 51502: KPF2K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								JERRYCAN 8.9 KG 
Irix HP - SI 180	20	Microgel	n/a	-30 to 120	none	n/a	Dark yellow	101877



CALCIUM SULFONATE COMPLEX GREASES  
**MINERAL**  
**IRIX EVO CSX 440-2**

APPLICATION




Suitable for both industrial, marine and off-road applications. The extreme load carrying capacity and excellent water resistance make the product a perfect choice for heavily loaded applications in hot, or wet and corrosive environments.

ADVANTAGES

- Very good corrosion protection.
- Superb mechanical stability.
- Very good water resistance.
- Excellent load carrying capacity.

CLASSIFICATION

ISO 12924: L-XC(F)DIB2  
DIN 51502: KP2N-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART. 	DRUM 50 KG 	DRUM 180 KG 
Irix EVO CSX 440-2	440	Calcium Sulfonate Complex	2	-20 to 140 (max 180°C)	>280	650	Brown	110389	110390	110391







# FOOD & BEVERAGE GREASES

Like any industry, lubrication is key to reliability and productivity, but it is equally important that the lubricants used in the food industry actively contribute to improving food safety standards too, hence MOTUL has consistently invested in its capability to formulate food grade lubricants that deliver equipment protection whilst ensuring compliance with relevant industry regulations. The Motul range of high performance food grade greases are NSF H1 registered.



## BENTONITE GREASE

### WHITE OIL

## **IRIX BE 70-2 FG**

(formerly *TECH GREASE FG 2*)

#### APPLICATION

Suitable for the lubrication of anti-friction bearings, chains, joints, slides in food processing, cosmetic and pharmaceutical industries. Intended for use in applications where there is only potential for incidental food contact. NSF H1 registered under the registration number 139436. Kosher and Halal certified. Meets the FDA - 21 CFR 187.3570 specifications.

#### ADVANTAGES

- Excellent water resistance.
- Permitted for incidental food contact.
- Translucent grease.

#### CLASSIFICATION

ISO 12924: L-XBCAA2  
DIN 51502: KPX2K-15

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING			
								24 x 0.4 KG CART.	12 x 0.9 KG CART.	PAIL 25 KG	DRUM 50 KG
<i>Irix BE 70-2 FG</i>	70	Bentonite	2	-15 to 120	none	n/a	Crystal	103198	101672	102152	110437



## CALCIUM SULFONATE COMPLEX GREASES

### SEMI-SYNTHETIC

## **IRIX EVO CSX 100-2 FG**

#### APPLICATION

Suitable for food industries where lubricants may have incidental contacts with food stuff. It is recommended for heavy loaded applications with medium to high speed bearings such as pellet presses and compactors used to process pet food and animal feed. Good pumpability in centralized lubrication systems even at low temperature. NSF H1 registered under number 161192.

#### ADVANTAGES

- Excellent water resistance.
- Good load carrying capacity.
- Excellent resistance to shock loads.

#### CLASSIFICATION

ISO 12924: L-XC(F)DHB1.5  
DIN 51502: KP1.5N-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
<i>Irix EVO CSX 100-2 FG</i>	100	Calcium Sulfonate Complex	1.5	-30 to 140 (max 180°C)	>300	650	Brown	110392	110393	110394



**CALCIUM SULFONATE COMPLEX GREASES**  
**WHITE OIL**  
**IRIX EVO CSX 460-2 FG**

**APPLICATION**

Suitable for food industries where lubricants may have incidental contacts with food stuff. Recommended for heavy loaded applications with low to medium speed bearings, such as pellet presses and compactors used to process pet food and animal feed. NSF H1 registered under number 161193.

**ADVANTAGES**

- Excellent water resistance.
- Good load carrying capacity.
- Excellent resistance to shock loads.

**CLASSIFICATION**

ISO 12924: L-XB(F)DHB2  
 DIN 51502: KP2N-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix EVO CSX 460-2 FG	460	Calcium Sulfonate Complex	2	-20 to 140 (max 180°C)	>280	650	Brown			
								110395	110396	110397



**ALUMINIUM COMPLEX GREASES**  
**SYNTHETIC**  
**IRIX INO AX 330-2 FG**  
 (formerly IRIX HP - PAK 332)

**APPLICATION**

Suitable for food industries where lubricants may have incidental contacts with food stuff. It is recommended for lubrication for bearings operating at medium speed, including heavily loaded applications. NSF H1 registered under number 155333.

**ADVANTAGES**

- Excellent water and oxidation resistance.
- Good load carrying capacity.
- Excellent resistance to shock loads.

**CLASSIFICATION**

ISO 12924: L-XDCEB2  
 DIN 51502: KPHC2K-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	12 x 1 KG	DRUM 50 KG
Irix INO AX 330-2 FG	330	Aluminium Complex	2	-40 to 120 (max 130°C)	>230	>400	White			
								108105	110438	110448



**PTFE GREASES**  
**SILICONE**  
**IRIX INO TF 1000-3 FG**

**APPLICATION**

Suitable for the lubrication of seals and gaskets, plastic parts for tap and valve systems, sealing of glass instruments. Can also be used for very low-load rolling bearings used in food & beverage industry. NSF H1 registered under number 161196.

**ADVANTAGES**

- Excellent resistance to high temperatures, water even if hot and steam.
- Non-physiological effect.
- Good compatibility with EPDM seals.
- Excellent performance even at high temperatures.

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								12 x 1 KG
Irix INO TF 1000-3 FG	1000	PTFE	3	-45 to 180	>300	n/a	White	
								110431




SILICA PASTE  
**SEMI-SYNTHETIC**  
**IRIX CERAMIC PASTE**

APPLICATION

Suitable for lubricating bushes, sliding surfaces, and small open plastic or metal gears. It is also an anti-seize compound for threaded fasteners. The compound is designed to prevent damages during startup and protect against premature wear during the running in period. Not recommended for the lubrication of anti-friction bearings. NSF H1 registered under number 161195.

ADVANTAGES

- Excellent water resistance.
- Prevents seizure of threaded components.
- Protection against scuffing.

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								12 x 1 KG 
Irix Ceramic Paste	240	Silica	2	-30 to 150	none	600	White	110388



CALCIUM GREASES  
**ESTER**  
**IRIX BIO C 210-2 FG**

APPLICATION




This grease is ideal not only for applications in the food producing sector, but also in marine, forestry, agriculture and construction machinery. It is easily pumpable in most modern high pressure centralized lubrication systems. NSF H1 registered under number 161194.

ADVANTAGES

- Readily biodegradable.
- Excellent water resistance.
- Excellent adhesion.

CLASSIFICATION

ISO 12924: L-XD(F)BIB2  
 DIN 51502: KPE2G-40

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART. 	DRUM 50 KG 	DRUM 180 KG 
Irix BIO C 210-2 FG	210	Calcium	2	-40 to 120	>140	300	White	110417	110418	110419







# SPECIALTY GREASES

From a large variety of additives and base oils, these Motul products offer peak performance and reliability in extreme conditions, for day to day maintenance or lifetime lubrication.



## POLYMER BASED GREASES SYNTHETIC IRIX INO P 260-2

### APPLICATION




Suitable for a wide variety of applications where long life is of critical importance. Improved lubrication of sensitive materials such as aluminum, ceramics, and elastomers. Due to the inert nature of the thickener system, the product is also compatible with most types of conventional lubricating greases.

### ADVANTAGES

- Long life.
- Inert thickener.
- Excellent water resistance.
- Controlled oil separation.
- Excellent pumpability.
- Excellent resistance to water and aggressive chemicals.

### CLASSIFICATION

ISO 12924: L-XC(F)CIB2  
DIN 51502: KPHC2K-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								24 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix INO P 260-2	260	Polymer	2	-30 to 120	>140	320	Yellow			
								110403	110404	110405



## POLYUREA BASED GREASES MINERAL IRIX EVO PU 190-2

### APPLICATION




This grease is extremely temperature stable and covers a wide temperature range. It is extremely suitable for lubricating roller and friction bearings exposed to high temperatures and pressure. It is especially appropriate for lifetime lubrication of roller bearings in maintenance-free devices but also for earthmoving equipments or the crushing industry where longer lubrication intervals are determined.

### ADVANTAGES

- Work stable.
- Oxidation resistant.
- Water resistant.
- Excellent corrosion protection.
- High thermal load bearing capacity, extremely temperature stable.
- High pressure absorption capacity.
- Good adhesiveness.

### CLASSIFICATION

DIN 51502: KP2P-30

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING		
								12 x 0.4 KG CART.	DRUM 50 KG	DRUM 180 KG
Irix EVO PU 190-2	190	Polyurea	2	-30 to 160 (max 180°C)	>300	315	Amber			
								110423	110429	110430





POLYUREA BASED GREASES

**MINERAL**  
**IRIX INO TF 500-2**

APPLICATION

Adapted for the lubrication of bearings and articulations submitted to high temperatures as in corrugator services, ovens, drying and stabilisation tunnels. Typical applications include preconditioner rolls, single facers, and double backers. It is well suited for the lubrication and preservation of electrical contacts. The product is chemically inert, non-flammable, non-toxic and remains unaffected by water and steam, preventing lubricant washout.

\* Special lubricant, please contact Motul before ordering.

ADVANTAGES

- Non-flammable.
- Physico-chemical inert to liquids or gases.
- Resistant to thermal and mechanical stresses and to most concentrated chemical agents.
- Compatible with almost all metal, elastomer, seal types, plastics and metals.
- Very wide temperature range.

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
<i>Irix INO TF 500-2</i>	500	PTFE	2	-30 to 300	none	>500	White	10 x 0.8 KG CART. 
								110445



PTFE GREASES

**SILICONE**  
**IRIX INO TF 1000-3 FG**

APPLICATION

Suitable for the lubrication of seals and gaskets, plastic parts for tap and valve systems, sealing of glass instruments. Can also be used for very low-load rolling bearings used in food & beverage industry. NSF H1 registered under number 161196.

ADVANTAGES

- Excellent resistance to high temperatures, water even if hot and steam.
- Non-physiological effect.
- Good compatibility with EPDM seals.
- Excellent performance even at high temperatures.

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
<i>Irix INO TF 1000-3 FG</i>	1000	PTFE	3	-45 to 180	>300	n/a	White	12 x 1 KG 
								110431



SILICA PASTE

**SEMI-SYNTHETIC**  
**IRIX CERAMIC PASTE**

APPLICATION

Suitable for lubricating bushes, sliding surfaces, and small open plastic or metal gears. It is also an anti-seize compound for threaded fasteners. The compound is designed to prevent damages during startup and protect against premature wear during the running in period. Not recommended for the lubrication of anti-friction bearings. NSF H1 registered under number 161195.

ADVANTAGES

- Excellent water resistance.
- Prevents seizure of threaded components.
- Protection against scuffing.

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
<i>Irix Ceramic Paste</i>	240	Silica	2	-30 to 150	none	600	White	12 x 1 KG 
								110388




LITHIUM PASTE  
**MINERAL**  
**IRIX ALUMINIUM PASTE**

APPLICATION

Suitable to ease assemblies, static or semi-static (coupling electrical motor/gear boxes, ingot clamps, and any other mechanical parts working at very low speed and high temperatures). This paste considerably reduces contact corrosion effects and eases disassembly even after a long period of exposure at high temperature.

ADVANTAGES

- High temperature resistance.
- Excellent adhesion.
- Protection against scuffing.
- Easier assembling and disassembling.

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								12 x 1 KG 
Irix Aluminium Paste	100	Lithium	2	-20 to 700	>190	315	Aluminium	110387



BENTONITE BASED PASTE  
**MINERAL**  
**IRIX COPPER PASTE**  
*(formerly IRIX HP-BEM 482 CU)*

APPLICATION


Suitable to ease assemblies, static or semi-static (coupling electrical motor/gear boxes, ingot clamps, and any other mechanical parts working at very low speed and high temperatures). This paste considerably reduces contact corrosion effects and eases disassembly even after a long period of exposure at high temperature.

ADVANTAGES

- Contains 25% copper powder.
- High temperature assembling paste.
- Easier assembling and disassembling.
- Good protection against corrosion.
- Excellent adhesion.

CLASSIFICATION

ISO 12924: L-XCGDB2  
DIN 51502: KF2T-35

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								12 x 1 KG 
Irix Copper Paste	485	Bentonite	2	-35 to 1100	none	400	Copper	110439



LITHIUM COMPLEX PASTE  
**SEMI-SYNTHETIC**  
**IRIX ROCK DRILL PASTE**

APPLICATION


Suitable for various types of bearing applications including heavy load conditions and wet environments. The copper and graphite solid additives give extra protection in applications with slow moving or oscillating motions.

ADVANTAGES

- Good load carrying capacity.
- Excellent resistance to shock loads.
- Good protection against corrosion.
- Excellent extreme-pressure properties.

CLASSIFICATION

ISO 12924: L-XBCHB2  
DIN 51502: KPF2K-20

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								12 x 1 KG 
Irix Rock Drill Paste	320	Lithium Complex	2	-20 to 180 (max 200°C)	>240	>620	Black	110406



LITHIUM-CALCIUM GREASES

**MINERAL**  
**IRIX EVO LC 1200-2**

(formerly IRIX HP - LCM 1202 CC)

APPLICATION


Suitable for heavily loaded industrial and heavy-duty applications including extreme outdoor wet and dirty conditions. Perfect choice for the lubrication of slow moving and heavily loaded bearings and tool or workpiece clamping systems in machine tools. This grease provides excellent adhesion and water resistance for perfect protection of chucks, collets and vices.

ADVANTAGES

- Excellent load carrying capacity.
- Very good water resistance.
- Excellent adhesion.
- Very good resistance to shock loads.
- Good corrosion protection.

CLASSIFICATION

ISO 12924: L-XB(F)CHB2  
DIN 51502: KPF2K-10

PRODUCT NAME	BASE OIL VISCOSITY AT 40°C (CST)	THICKENER	NLGI GRADE	TEMPERATURE RANGE (°C)	DROP POINT (°C)	4-BALL WELD LOAD (KG)	COLOUR	AVAILABLE PACKAGING
								24 x 0.4 KG CART. 
Irix EVO LC 1200-2	1200	Lithium-Calcium	2	-10 to 120 (max 130°C)	>180	>500	White	109613





# AEROSOLS

Specialty products for a simple, quick and clean form of application for various employments. Due to their precise application - even in difficult to access areas - these aerosols are indispensable for numerous maintenance and assembly applications.




## MULTI-USE SAFCO SPRAY MULTILUBE

**APPLICATION**

Multifunctional lubricant, rust preventative, cleaner for any kind of industrial maintenance and daily workshop usage.

**ADVANTAGES**

- One product for various applications.
- Biodegradable.
- Without silicone, acids or chlorinated solvents.
- Compatible with all plastics, elastomers and paint.

PRODUCT NAME	CONTAINER	NET CONTENT	FLASH POINT °C	AVAILABLE PACKAGING
				6 x AEROSOLS 400 mL 
Safco Spray Multilube	650 mL	400 mL	>100	106139



## CLEANER - DEGREASER SAFCO SPRAY 21

**APPLICATION**

Fast cleaning solvent degreaser for any kind of workshop and industrial usage. Can also be used as a temporary corrosion protection.

**ADVANTAGES**

- Compatible with most plastics and elastomers.
- Quick evaporation time.
- Cleans part from oil, grease, ink, glue, resins or plastics residues.

PRODUCT NAME	CONTAINER	NET CONTENT	FLASH POINT °C	AVAILABLE PACKAGING
				6 x AEROSOLS 400 mL 
Safco Spray 21	650 mL	400 mL	23	106972



## EJECTOR PIN LUBRICATION EJECTOR LUBE

**APPLICATION**

High performance grease for ejector pin lubrication of plastic injection moulds.

**ADVANTAGES**

- High temperature stable, inflammable.
- Excellent anti-wear properties.
- Very good corrosion protection.
- Compatible with any kind of metals, plastics and elastomers.

PRODUCT NAME	CONTAINER	NET CONTENT	AVAILABLE PACKAGING	
			6 X AEROSOLS 400 mL	
Ejector Lube	650 mL	400 mL	107020	



## RELEASE AGENT FOR PLASTIC INJECTION DEMOLD SPRAY

**APPLICATION**

Release agent for plastic injection moulds, extrusion, blow moulding, thermoforming and compression. Perfect for the release of materials such as polyamides, ABS, polyurethanes, epoxies, polyesters, rubbers...

**ADVANTAGES**

- High temperature stable, inflammable.
- Excellent anti-wear properties.
- Very good corrosion protection.
- Compatible with any kind of metals, plastics and elastomers.

PRODUCT NAME	CONTAINER	NET CONTENT	AVAILABLE PACKAGING	
			6 X AEROSOLS 500 mL	
Demold Spray	650 mL	500 mL	107019	




## HEAVY-DUTY CLEANING GEL INTENSE CLEANER

**APPLICATION**

High power gel cleaner for paints, residues and dirt on metal surfaces. Especially suited for the cleaning of plastic residues on plastic injection moulds.

**ADVANTAGES**

- Without chlorinated solvents.
- Very fast cleaning time.
- Works perfectly even on vertical surfaces.

PRODUCT NAME	CONTAINER	NET CONTENT	FLASH POINT °C	AVAILABLE PACKAGING	
				6 X AEROSOLS 400 mL	
Intense Cleaner	650 mL	400 mL	43	107021	




## METALWORKING NEAT OIL SUPRACO SPRAY

**APPLICATION**

For very severe machining on all ferrous metals such as manual thread, comb thread, rolling thread, die thread, drilling, manual and semi-automatic tapping.

**ADVANTAGES**

- Very high lubricating properties and extreme-pressure capacity.
- Good anti-wear properties.
- Increases tool life.

PRODUCT NAME	VISCOSITY AT 40°C (CST)	CORROSION COPPER	FLASH POINT °C	AVAILABLE PACKAGING	
				6 X AEROSOLS 400 mL	
Supraco Spray	53	4c	100	108719	

# TABLE OF CONTENT

<b>PRODUCT NAME</b>	<b>SECTION</b>	<b>PAGE</b>
ALTERNA 100	COMPRESSOR OILS	72
ALTERNA 150	COMPRESSOR OILS	72
ALTERNA 68	COMPRESSOR OILS	72
BAR SY 100	COMPRESSOR OILS	73
BAR SY 46	COMPRESSOR OILS	73
BAR SY 68	COMPRESSOR OILS	73
BIOCOOL 3130	SOLUBLE MACHINING FLUIDS	22
BIOCOOL 3210	SOLUBLE MACHINING FLUIDS	22
BIOCOOL 3520	SOLUBLE MACHINING FLUIDS	23
BIOCOOL 3740	SOLUBLE MACHINING FLUIDS	23
BIOCOOL 3820	SOLUBLE MACHINING FLUIDS	23
BIOCOOL 3837 GR	SOLUBLE MACHINING FLUIDS	24
CADREX DR 100 SC	FORMING	34
CADREX DR 220 SC	FORMING	34
CADREX DR 40 SC	FORMING	34
CADREX EV 1100	FORMING	35
CADREX EV 1400	FORMING	35
CADREX EV 1600	FORMING	35
CADREX EV 1800	FORMING	35
CADREX EV 4012	FORMING	35
CADREX FL 100	FORMING	35
CADREX V 877	FORMING	35
CENTER OIL FZ-4001E	FORMING	33
CENTER OIL FZ-8081 E	FORMING	33
CENTER OIL FZ-8209 E	FORMING	34
CG GREASE 000	MINING & HD GREASES	92
CHAIN FG 320	FOOD GRADE OILS	76
COMPRESSOR FG 46	FOOD GRADE OILS	75
COMPRESSOR FG 68	FOOD GRADE OILS	75
DEMOLD SPRAY	AEROSOLS	109
EJECTOR LUBE	AEROSOLS	109
GEAR FG 150	FOOD GRADE OILS	75
GEAR FG 220	FOOD GRADE OILS	75
GEAR FG 320	FOOD GRADE OILS	75
GEAR FG 460	FOOD GRADE OILS	75
GEAR FG 680	FOOD GRADE OILS	75
GEAR SY 100	GEAR OILS	65
GEAR SY 150	GEAR OILS	65
GEAR SY 220	GEAR OILS	65
GEAR SY 320	GEAR OILS	65
GEAR SY 460	GEAR OILS	65
GEAR SY 68	GEAR OILS	65
GREASE 100	MINING & HD GREASES	93
HD-AGRI GREASE	AGRICULTURE & FORESTRY GREASES	96
HYDRAULIC FG 100	FOOD GRADE OILS	74
HYDRAULIC FG 32	FOOD GRADE OILS	74
HYDRAULIC FG 46	FOOD GRADE OILS	74
HYDRAULIC FG-F 32	FOOD GRADE OILS	74
HYDRAULIC FG-V 46	FOOD GRADE OILS	75
INTENSE CLEANER	AEROSOLS	109
IRIX ALUMINIUM PASTE	SPECIALTY GREASES	106
IRIX BE 70-2 FG	FOOD & BEVERAGE GREASES	100
IRIX BIO 30-000	AGRICULTURE & FORESTRY GREASES	97
IRIX BIO C 110-2	AGRICULTURE & FORESTRY GREASES	97
IRIX BIO C 210-2 FG	AGRICULTURE & FORESTRY GREASES	97
	FOOD & BEVERAGE GREASES	102
IRIX C 120-2	GENERAL PURPOSE GREASES	80
IRIX C 1370-0	GENERAL PURPOSE GREASES	81
	MINING & HD GREASES	94
IRIX C 310-2	GENERAL PURPOSE GREASES	80
	AGRICULTURE & FORESTRY GREASES	96
IRIX CERAMIC PASTE	FOOD & BEVERAGE GREASES	102
	SPECIALTY GREASES	105
IRIX COPPER PASTE	SPECIALTY GREASES	106
IRIX EVO CSX 100-2 FG	FOOD & BEVERAGE GREASES	100

<b>PRODUCT NAME</b>	<b>SECTION</b>	<b>PAGE</b>
IRIX EVO CSX 290-2	HIGH & LOW TEMPERATURE GREASES	86
IRIX EVO CSX 440-2	HIGH & LOW TEMPERATURE GREASES	86
	AGRICULTURE & FORESTRY GREASES	98
IRIX EVO CSX 460-2 FG	FOOD & BEVERAGE GREASES	101
IRIX EVO LC 1200-2	MACHINE TOOL GREASES	91
	SPECIALTY GREASES	107
IRIX EVO LC 150-2	MACHINE TOOL GREASES	91
IRIX EVO LCX 500-0 G	GEAR GREASES	88
IRIX EVO LCX 920-000	GEAR GREASES	88
	MACHINE TOOL GREASES	90
IRIX EVO LX 200-2	HIGH & LOW TEMPERATURE GREASES	84
	MINING & HD GREASES	93
	SPECIALTY GREASES	104
IRIX EVO PU 190-2	MINING & HD GREASES	94
IRIX FIFTH WHEEL GREASE	AGRICULTURE & FORESTRY GREASES	98
IRIX HP - SI 180	FOOD & BEVERAGE GREASES	101
IRIX INO AX 330-2 FG	HIGH & LOW TEMPERATURE GREASES	85
IRIX INO LX 100-2	HIGH & LOW TEMPERATURE GREASES	85
IRIX INO LX 220-2	HIGH & LOW TEMPERATURE GREASES	84
IRIX INO LX 40-2	MACHINE TOOL GREASES	90
	HIGH & LOW TEMPERATURE GREASES	85
IRIX INO LX 460-2	SPECIALTY GREASES	104
IRIX INO P 260-2	FOOD & BEVERAGE GREASES	101
IRIX INO TF 1000-3 FG	SPECIALTY GREASES	105
	SPECIALTY GREASES	105
IRIX INO TF 500-2	GENERAL PURPOSE GREASES	82
IRIX L 130-1	GENERAL PURPOSE GREASES	82
IRIX L 130-2	GENERAL PURPOSE GREASES	82
IRIX L 130-3	GENERAL PURPOSE GREASES	82
IRIX L 150-2 MO	GENERAL PURPOSE GREASES	83
	MINING & HD GREASES	93
IRIX L 50-00	GENERAL PURPOSE GREASES	81
IRIX L 80-0	GENERAL PURPOSE GREASES	81
IRIX ROCK DRILL PASTE	SPECIALTY GREASES	106
MT LIGHT OIL PROTECT	RUST PREVENTATIVES	53
MT OIL PROTECT	RUST PREVENTATIVES	52
MT SHIP PROTECT	RUST PREVENTATIVES	53
MT SOLV PROTECT	RUST PREVENTATIVES	52
MT STORE PROTECT	RUST PREVENTATIVES	53
RUBRIC ARCTIC 26	HYDRAULIC FLUIDS	60
RUBRIC AW 22	HYDRAULIC FLUIDS	56
RUBRIC B 46	HYDRAULIC FLUIDS	56
RUBRIC BIO 46	HYDRAULIC FLUIDS	59
RUBRIC BIO 46 S	HYDRAULIC FLUIDS	59
RUBRIC BIO SYNT 46	HYDRAULIC FLUIDS	59
RUBRIC CLEAN HM 32	HYDRAULIC FLUIDS	58
RUBRIC CLEAN HM 46	HYDRAULIC FLUIDS	58
RUBRIC CLEAN HM 68	HYDRAULIC FLUIDS	58
RUBRIC EE 150	HYDRAULIC FLUIDS	56
RUBRIC HFC 40	HYDRAULIC FLUIDS	60
RUBRIC HFDU 46 FM	HYDRAULIC FLUIDS	60
RUBRIC HLPD 32	HYDRAULIC FLUIDS	57
RUBRIC HLPD 46	HYDRAULIC FLUIDS	57
RUBRIC HLPD 68	HYDRAULIC FLUIDS	57
RUBRIC HM 100	HYDRAULIC FLUIDS	57
RUBRIC HM 32	HYDRAULIC FLUIDS	57
RUBRIC HM 46	HYDRAULIC FLUIDS	57
RUBRIC HM 68	HYDRAULIC FLUIDS	57
RUBRIC HV 22	HYDRAULIC FLUIDS	58
RUBRIC HV 32	HYDRAULIC FLUIDS	58
RUBRIC HV 46	HYDRAULIC FLUIDS	58
RUBRIC HV 68	HYDRAULIC FLUIDS	58
RUBRIC LX 32	HYDRAULIC FLUIDS	57
RUBRIC LX 46	HYDRAULIC FLUIDS	57
RUBRIC LX 68	HYDRAULIC FLUIDS	57
RUBRIC R-CLEAN	HYDRAULIC FLUIDS	58

# TABLE OF CONTENT

<b>PRODUCT NAME</b>	<b>SECTION</b>	<b>PAGE</b>
RUBRIC RU 32	MULTIFUNCTIONAL OILS	62
RUBRIC RU 46	MULTIFUNCTIONAL OILS	62
SAFCO KLEEN 21	CLEANERS	46
SAFCO KLEEN 53	CLEANERS	46
SAFCO KLEEN 60	CLEANERS	47
SAFCO KLEEN 92	CLEANERS	47
SAFCO KLEEN INO 230	CLEANERS	48
SAFCO KLEEN V	CLEANERS	48
SAFCO KLEEN VF 150	CLEANERS	47
SAFCO KLEEN VF 200	CLEANERS	48
SAFCO SPRAY 21	AEROSOLS	108
SAFCO SPRAY MULTILUBE	AEROSOLS	108
SAFCOLITH GR 2 NS	SOLUBLE MACHINING FLUIDS	29
SAFKLEEN 1112	CLEANERS	49
SAFKLEEN 221	CLEANERS	49
SAFKLEEN 224	CLEANERS	49
SAFKLEEN 234	CLEANERS	50
SAFKLEEN 334	CLEANERS	50
SAFKLEEN 334 F	CLEANERS	50
SAFKLEEN 421	CLEANERS	51
SAFKOOL 6110 CS	SOLUBLE MACHINING FLUIDS	24
SAFKOOL 6210	SOLUBLE MACHINING FLUIDS	24
SAFKOOL 6220	SOLUBLE MACHINING FLUIDS	25
SAFKOOL 6420	SOLUBLE MACHINING FLUIDS	25
SAFKOOL 6620	SOLUBLE MACHINING FLUIDS	25
SAFKOOL 6817 GR	SOLUBLE MACHINING FLUIDS	26
SAFKOOL 6820 SW	SOLUBLE MACHINING FLUIDS	26
SAFKOOL TMC	SOLUBLE MACHINING FLUIDS	26
SLID FILM 100	SLIDEWAY OILS	66
SLID FILM 150	SLIDEWAY OILS	66
SLID FILM 220	SLIDEWAY OILS	66
SLID FILM 68	SLIDEWAY OILS	66
SOFT GREASE 0	GEAR GREASES	89
	MINING & HD GREASES	92
SPEED A 10	SPINDLE OILS	68
SPEED A 5	SPINDLE OILS	68
SPEED AA 2	SPINDLE OILS	68
STABILIS 9120	SOLUBLE MACHINING FLUIDS	27
STABILIS 9220	SOLUBLE MACHINING FLUIDS	27
STABILIS 9230	SOLUBLE MACHINING FLUIDS	27
STABILIS 9837 AL	SOLUBLE MACHINING FLUIDS	28
STABILIS 9910 AL	SOLUBLE MACHINING FLUIDS	28
STABILIS 9920 AL	SOLUBLE MACHINING FLUIDS	28
SUPRA CHAIN 120 HT	CHAIN OILS	70
SUPRA CHAIN 250 HT	CHAIN OILS	70
SUPRA GEAR GL 150	GEAR OILS	65
SUPRA GEAR GL 220	GEAR OILS	65
SUPRA GEAR GL 320	GEAR OILS	65
SUPRA SLIDE 220	SLIDEWAY OILS	67
SUPRA SLIDE 68	SLIDEWAY OILS	67
SUPRABAR SY 32	COMPRESSOR OILS	73
SUPRABAR SY 46	COMPRESSOR OILS	73
SUPRABAR SY 68	COMPRESSOR OILS	73
SUPRACAL 105	HEAT TRANSFER OILS	77
SUPRACAL 22	HEAT TRANSFER OILS	77
SUPRACAL 32	HEAT TRANSFER OILS	77
SUPRACO ELECTRIC 40A	FORMING	34
SUPRACO MPL 100	GEAR OILS	64
SUPRACO MPL 150	GEAR OILS	64
SUPRACO MPL 220	GEAR OILS	64
SUPRACO MPL 320	GEAR OILS	64
SUPRACO MPL 460	GEAR OILS	64
SUPRACO MPL 68	GEAR OILS	64
SUPRACO MPL 680	GEAR OILS	64
SUPRACO SPRAY	SPECIALTIES	17



<b>PRODUCT NAME</b>	<b>SECTION</b>	<b>PAGE</b>
SUPRACO SPRAY	AEROSOLS	109
SUPRACUT 15 B	SPECIALTIES	16
SUPRACUT 15 G	NEAT MACHINING OILS	12
SUPRACUT 20 G	NEAT MACHINING OILS	12
SUPRACUT 20X	NEAT MACHINING OILS	12
SUPRACUT 30 B	SPECIALTIES	16
SUPRACUT 30 G	NEAT MACHINING OILS	12
SUPRACUT 30 K	SPECIALTIES	16
SUPRACUT 40 B	SPECIALTIES	16
SUPRACUT 45 G	NEAT MACHINING OILS	12
SUPRACUT 50 B	SPECIALTIES	16
SUPRACUT EDM 03	SPECIALTIES	17
SUPRACUT EVO 10 M	NEAT MACHINING OILS	13
SUPRACUT EVO 10 X	NEAT MACHINING OILS	13
SUPRACUT EVO 15 G	NEAT MACHINING OILS	13
SUPRACUT EVO 15 M	NEAT MACHINING OILS	13
SUPRACUT EVO 20 M	NEAT MACHINING OILS	13
SUPRACUT EVO 20 X	NEAT MACHINING OILS	13
SUPRACUT EVO 2515	NEAT MACHINING OILS	14
SUPRACUT EVO 30 G	NEAT MACHINING OILS	13
SUPRACUT EVO 30 M	NEAT MACHINING OILS	13
SUPRACUT EVO 30 X	NEAT MACHINING OILS	13
SUPRACUT EVO 45 M	NEAT MACHINING OILS	13
SUPRACUT EVO 45 X	NEAT MACHINING OILS	13
SUPRACUT INO 20 GG	NEAT MACHINING OILS	14
SUPRACUT INO 20 MG	NEAT MACHINING OILS	14
SUPRACUT INO 20 XG	NEAT MACHINING OILS	15
SUPRACUT MQL 15	MINIMUM QUANTITY LUBRICATION	20
SUPRACUT MQL 20	MINIMUM QUANTITY LUBRICATION	20
SUPRACUT MQL 30	MINIMUM QUANTITY LUBRICATION	20
SUPRACUT MQL 45	MINIMUM QUANTITY LUBRICATION	20
SUPRADRAW 211	WIRE DRAWING	36
SUPRADRAW 311	WIRE DRAWING	36
SUPRADRAW 411	WIRE DRAWING	37
SUPRAGRIND 05 G	GRINDING & SUPERFINISHING	18
SUPRAGRIND 10 X	GRINDING & SUPERFINISHING	18
SUPRAGRIND EVO 08 M	GRINDING & SUPERFINISHING	19
SUPRAGRIND INO 08 GV	GRINDING & SUPERFINISHING	19
THERMIC 100	HEAT TREATMENT	41
THERMIC 100 FC	HEAT TREATMENT	41
THERMIC 15	HEAT TREATMENT	40
THERMIC 30 R	HEAT TREATMENT	40
THERMIC B	HEAT TREATMENT	43
THERMIC BOOST	HEAT TREATMENT	44
THERMIC EVO 140	HEAT TREATMENT	40
THERMIC EVO 420	HEAT TREATMENT	42
THERMIC EVO 430	HEAT TREATMENT	42
THERMIC FGP	HEAT TREATMENT	44
THERMIC INO 130	HEAT TREATMENT	39
THERMIC INO 235	HEAT TREATMENT	41
THERMIC SH 615	HEAT TREATMENT	43
THERMIC SP	HEAT TREATMENT	43
THERMIC SV 6	HEAT TREATMENT	42
THERMIC TO 10	HEAT TREATMENT	38
THERMIC TO 19 R	HEAT TREATMENT	38
THERMIC TO 20 R	HEAT TREATMENT	39
THERMIC TO 26 R	HEAT TREATMENT	39
UNIVERSELLE 150 SC	FORMING	32
UNIVERSELLE 55 SC	FORMING	32
UNIVERSELLE 68 EP	FORMING	33
UNIVERSELLE 68 SC	FORMING	32
UNIVERSELLE 800 SC	FORMING	32
UNIVERSELLE 90 SC	FORMING	32
VIS 32	COMPRESSOR OILS	72
VIS 46	COMPRESSOR OILS	72

**MOTUL**

# PARIS HEAD OFFICE

FOLLOW US ON  
[motul.com](http://motul.com)



Motul - 119 boulevard Félix Faure - 93300 Aubervilliers - FRANCE  
Tel. +33 (0)1 48 11 70 00 (trade only) - Fax. +33 (0)1 48 33 28 79  
Contact: [info@motul.com](mailto:info@motul.com)

